

/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

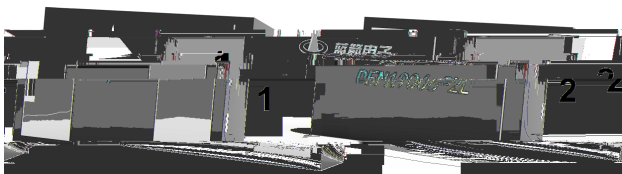

/ Marking

--	--


/ Absolute Maximum Ratings(Ta=25)

	$\leq \mu \delta \leq$		
	(μ)		
	$()$		
		~	
	θ		

/ Electrical Characteristics(Ta=25)


						μ
		$^{\circ}\text{C}$				μ
		Ω				
		μ				

/ Electrical Characteristic Curve

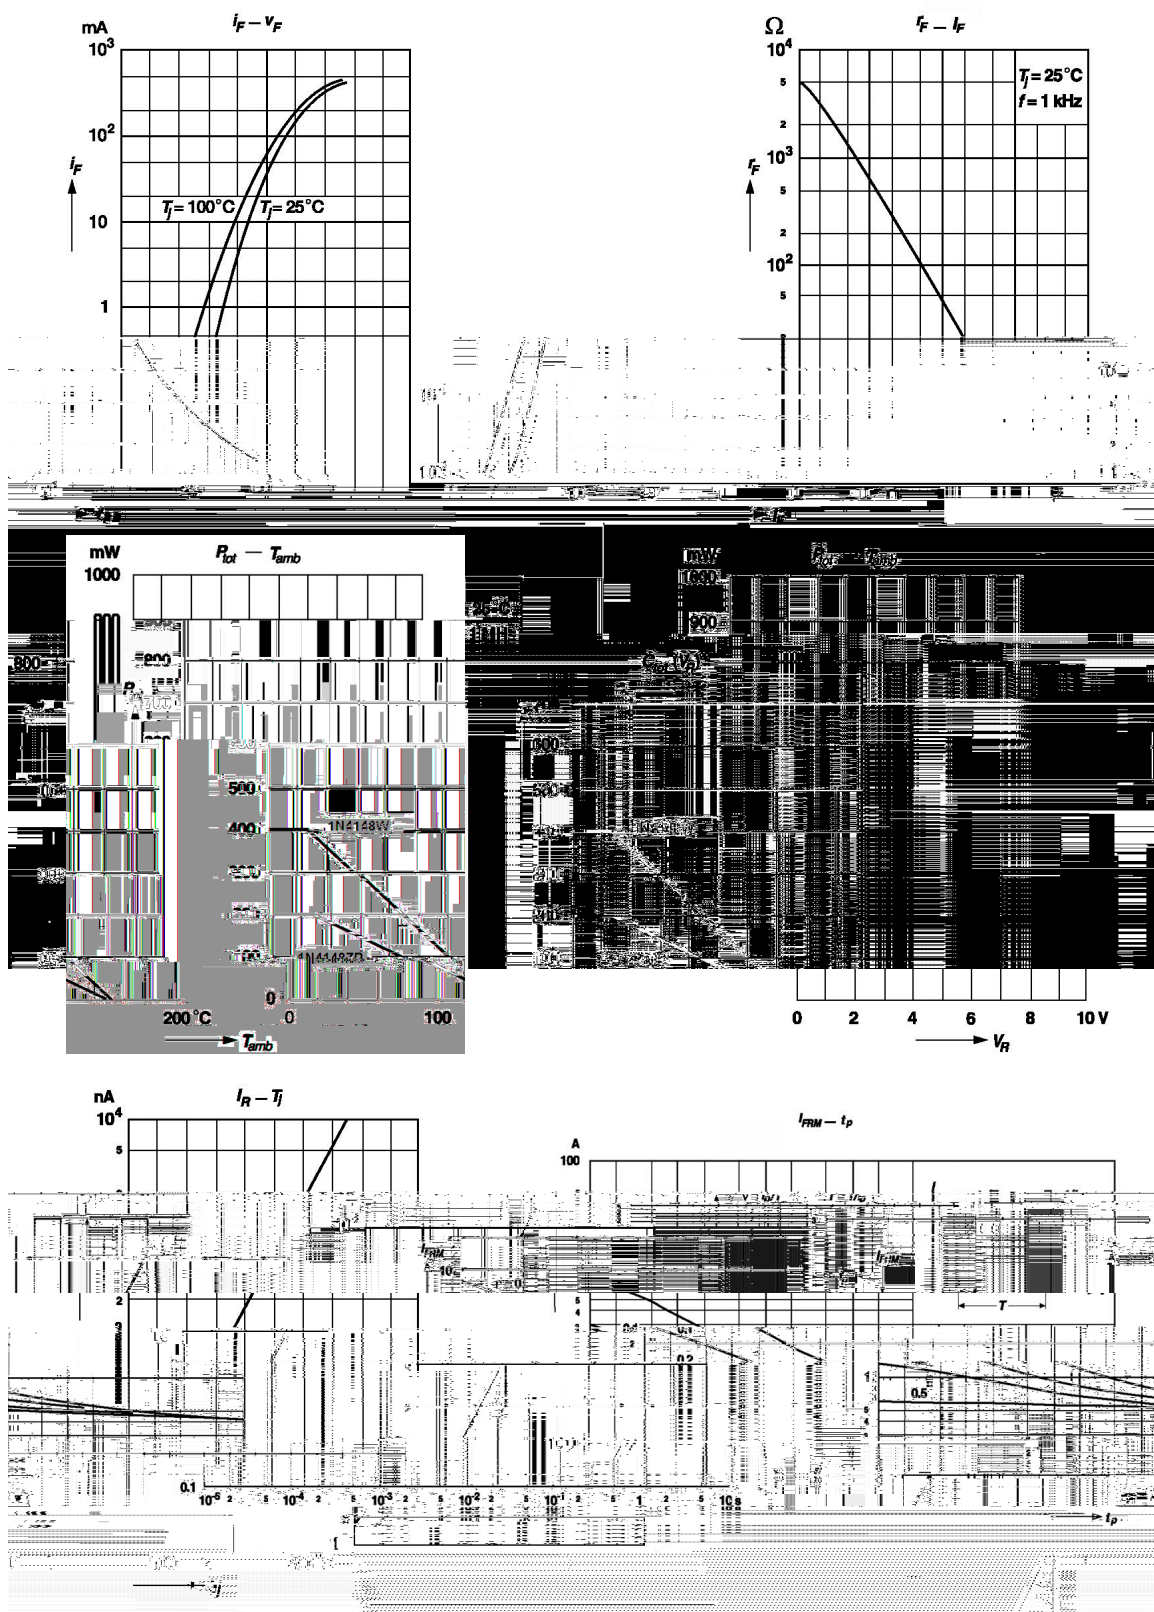

/ Package Dimensions

DFN1006-2LUnit:mm

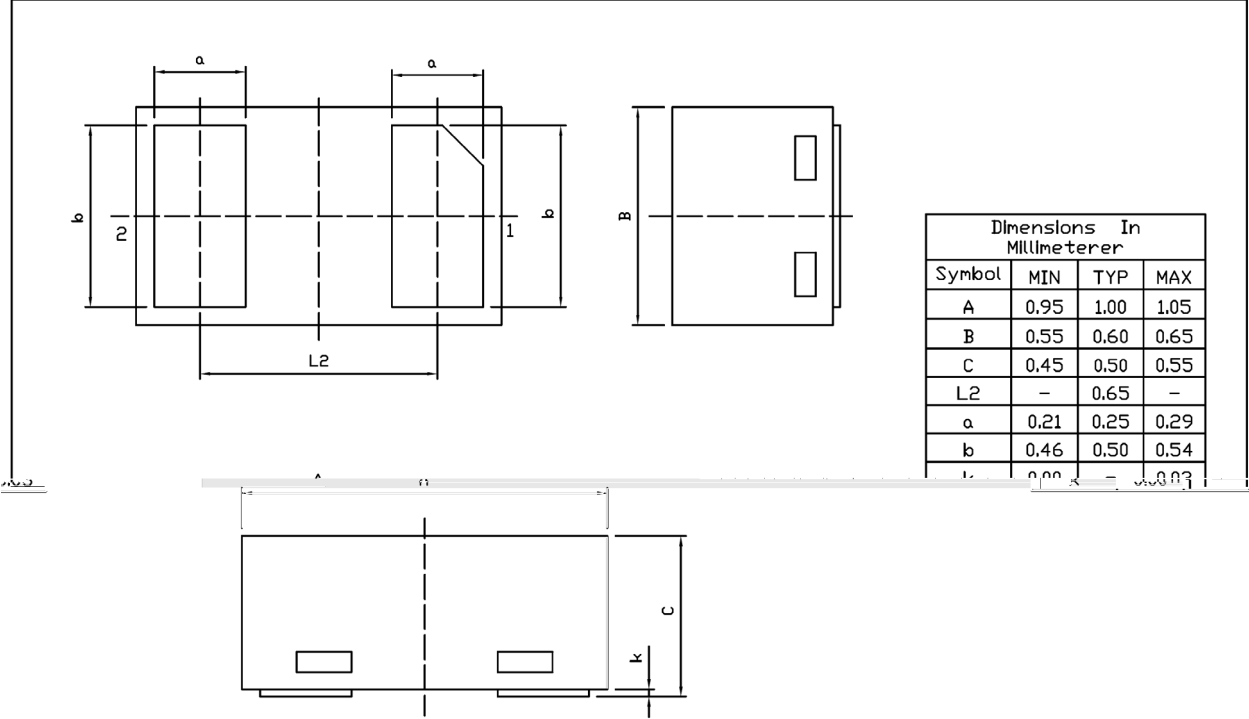


/ Marking Instructions



H

A2

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

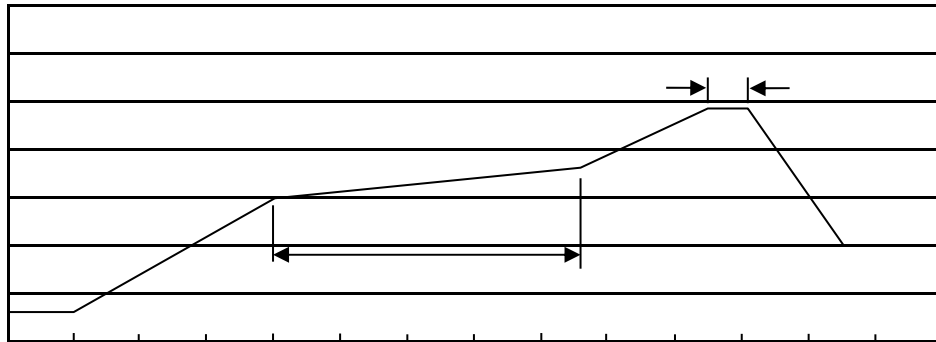 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		

/ Notices