



/ Descriptions

TO-220 PNP

/ Features


2N6122

/ Applications**/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**

[illegible][illegible]

2 6

/ Electrical Characteristic Curve

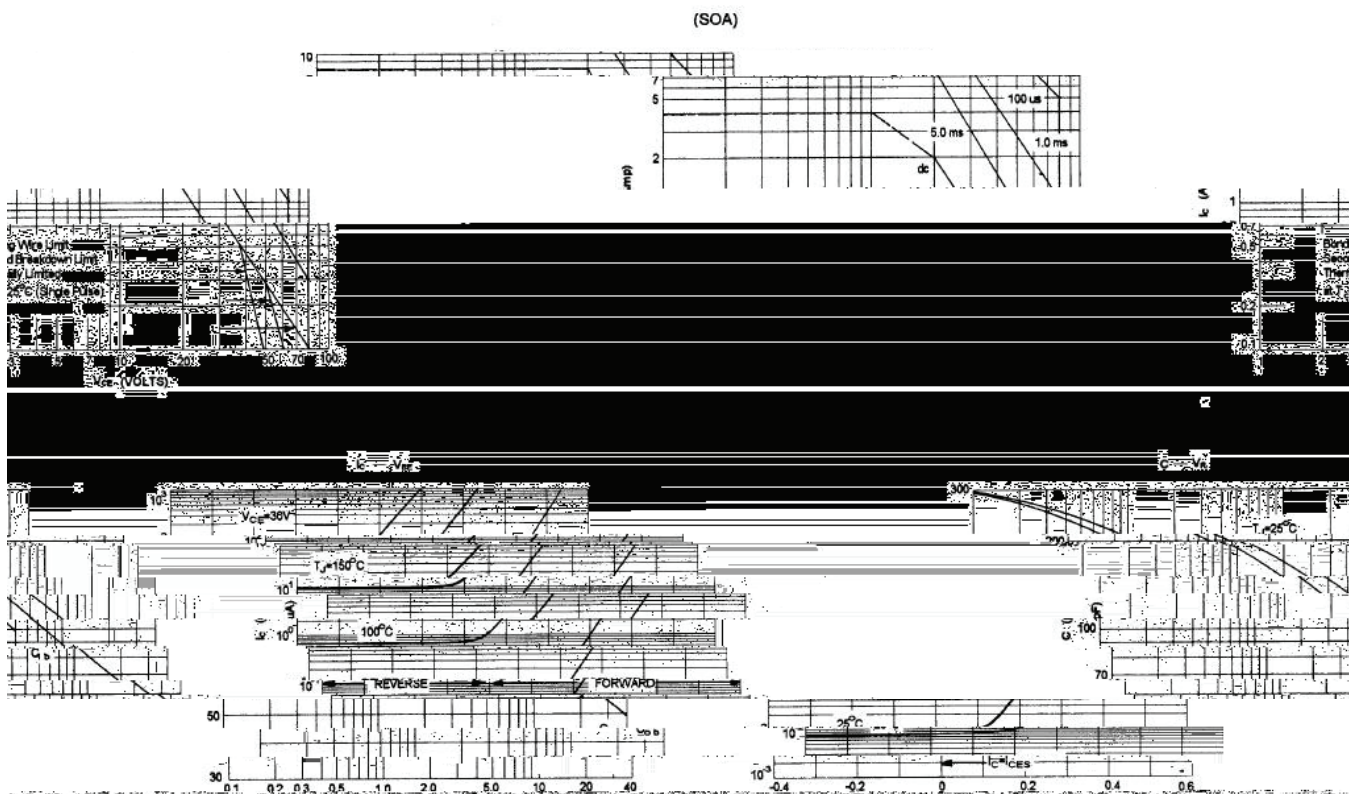


/ Package Dimensions

mm


TO-220

单位:

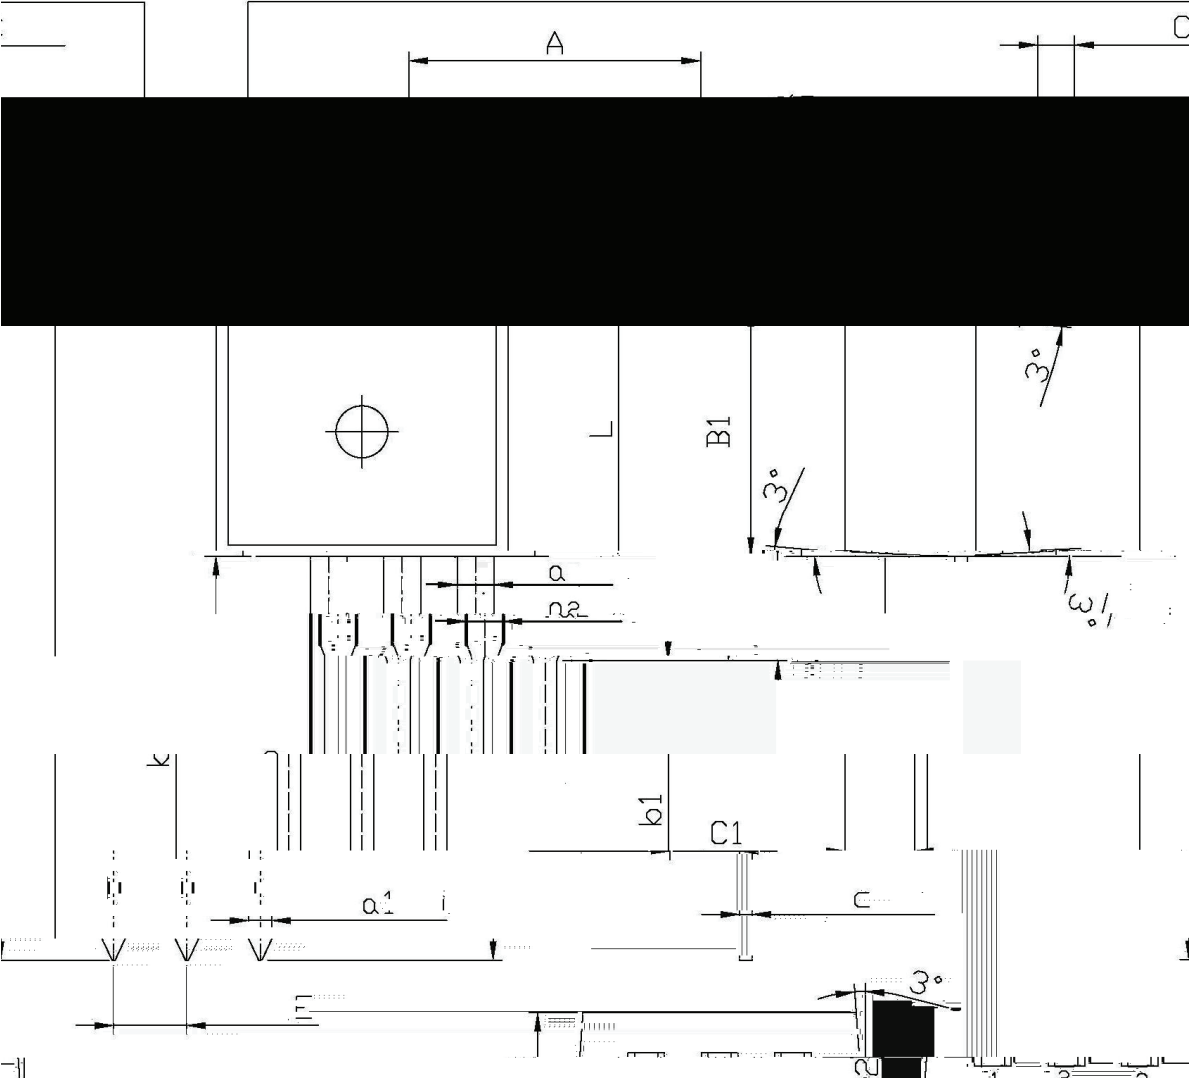


Dimensions in Millimeters			Dimensions in Millimeters		
Symbol	Min	Max	Symbol	Min	Max
B1	9.0	9.4	C1	12.6	13.6
C	0.4	0.6	a	1.22	1.32
C2	4.3	4.7	e	2.34	2.74
			Q2	1.25	1.45

/ Marking Instructions

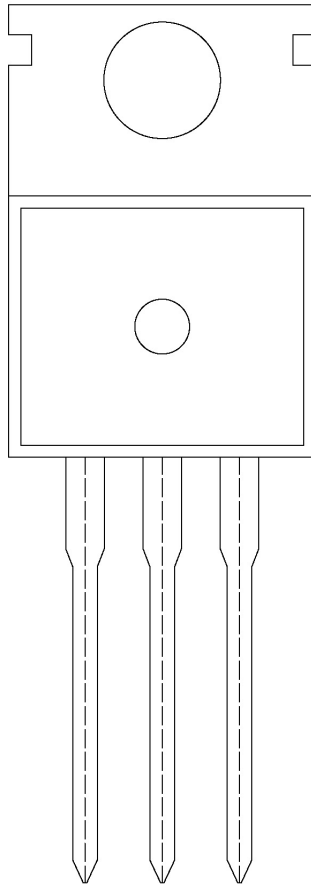

() / Temperature Profile for Dip Soldering(Pb-Free)

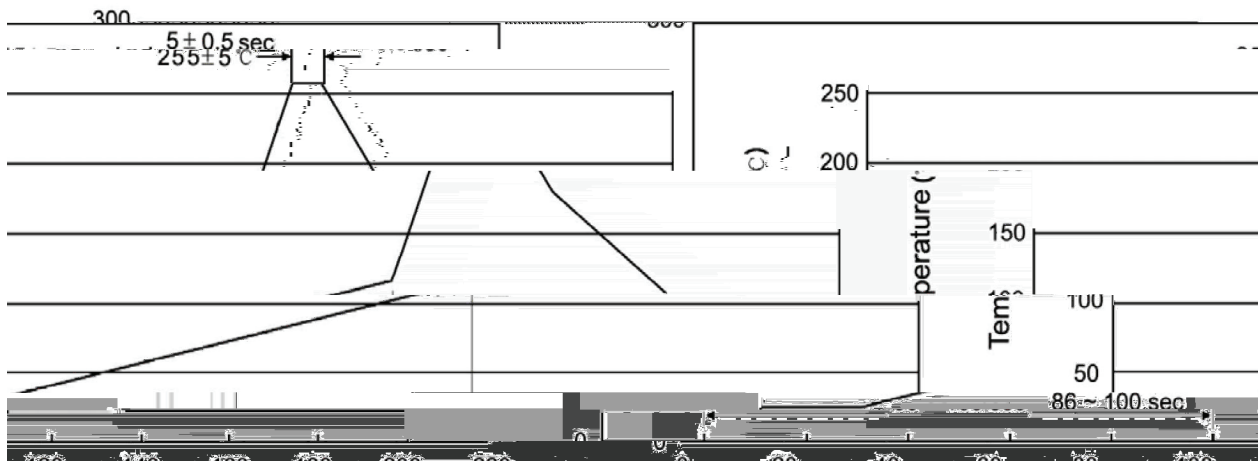 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices