

/ Descriptions


SOT-23                  PNP

/ Features


2SC5343S

/ Applications

/ Equivalent Circuit



/ Pinning




/  $h_{FE}$  Classifications & Marking

|  |  |  |  |  |
|--|--|--|--|--|
|  |  |  |  |  |
|  |  |  |  |  |
|  |  |  |  |  |

|  |  |  |   |
|--|--|--|---|
|  |  |  |   |
|  |  |  |   |
|  |  |  |   |
|  |  |  |   |
|  |  |  |   |
|  |  |  |   |
|  |  |  | ℃ |
|  |  |  | ℃ |


## / Electrical Characteristic Curve

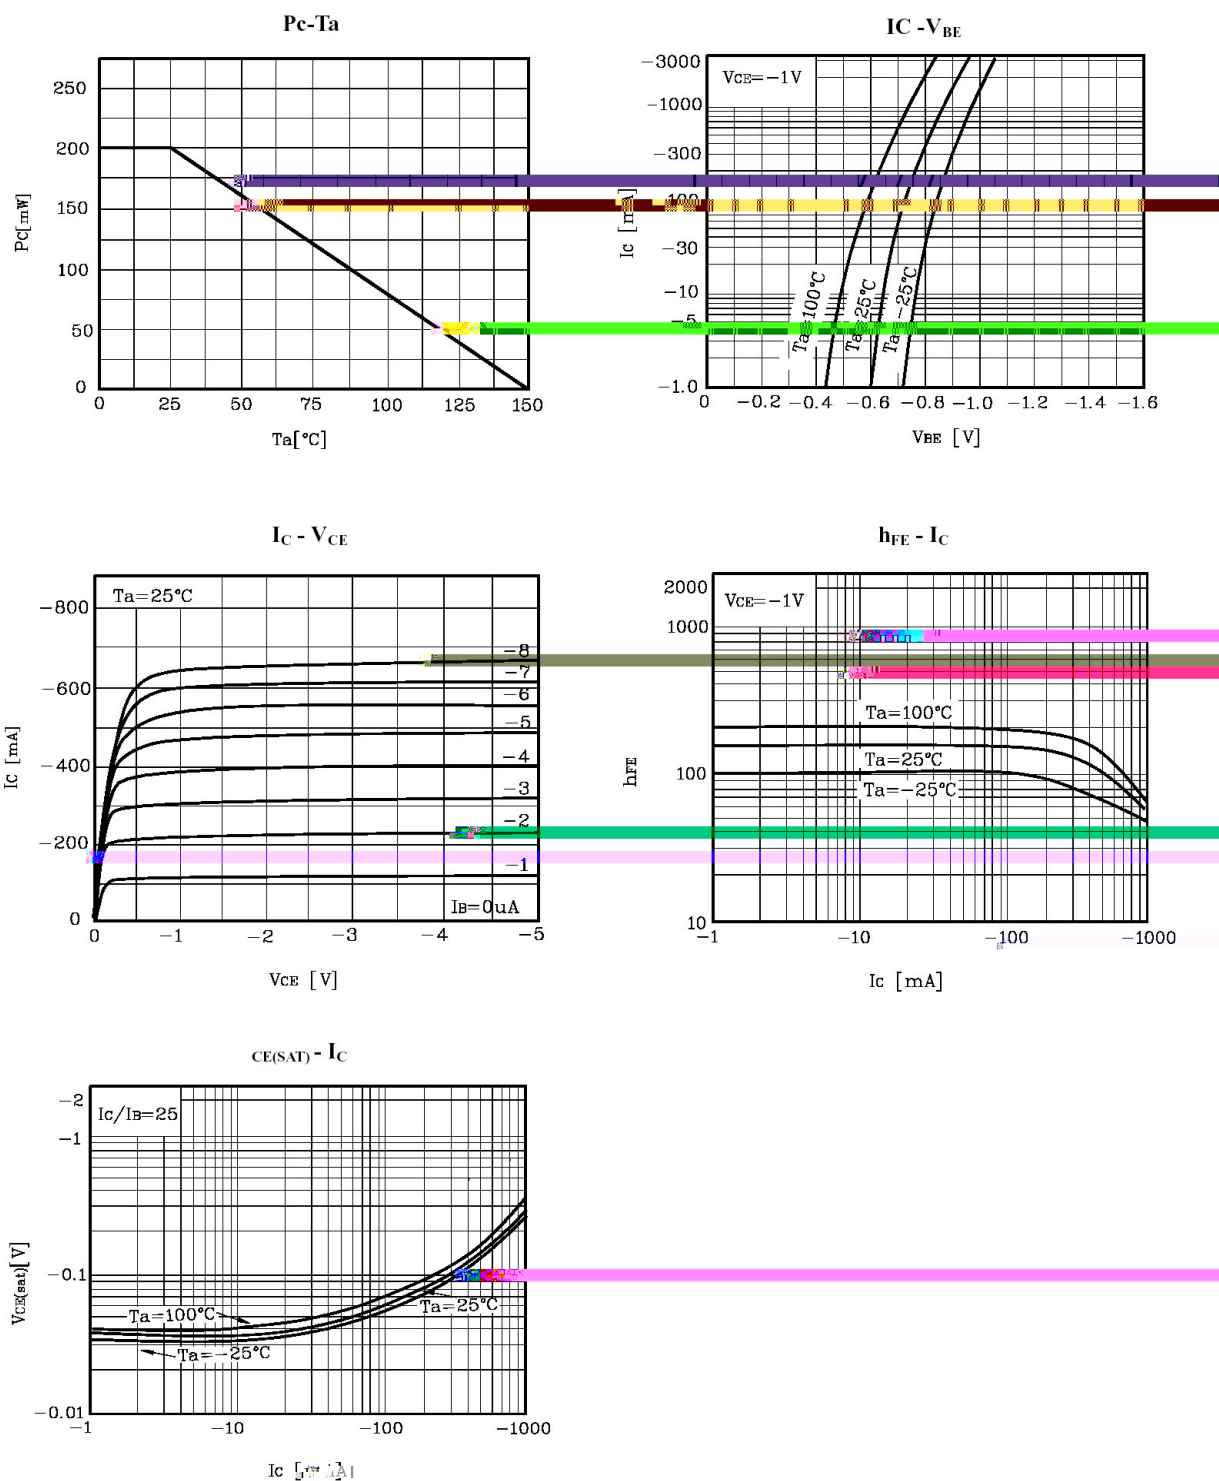


/ Package Dimensions

SOT-23

单位：mm

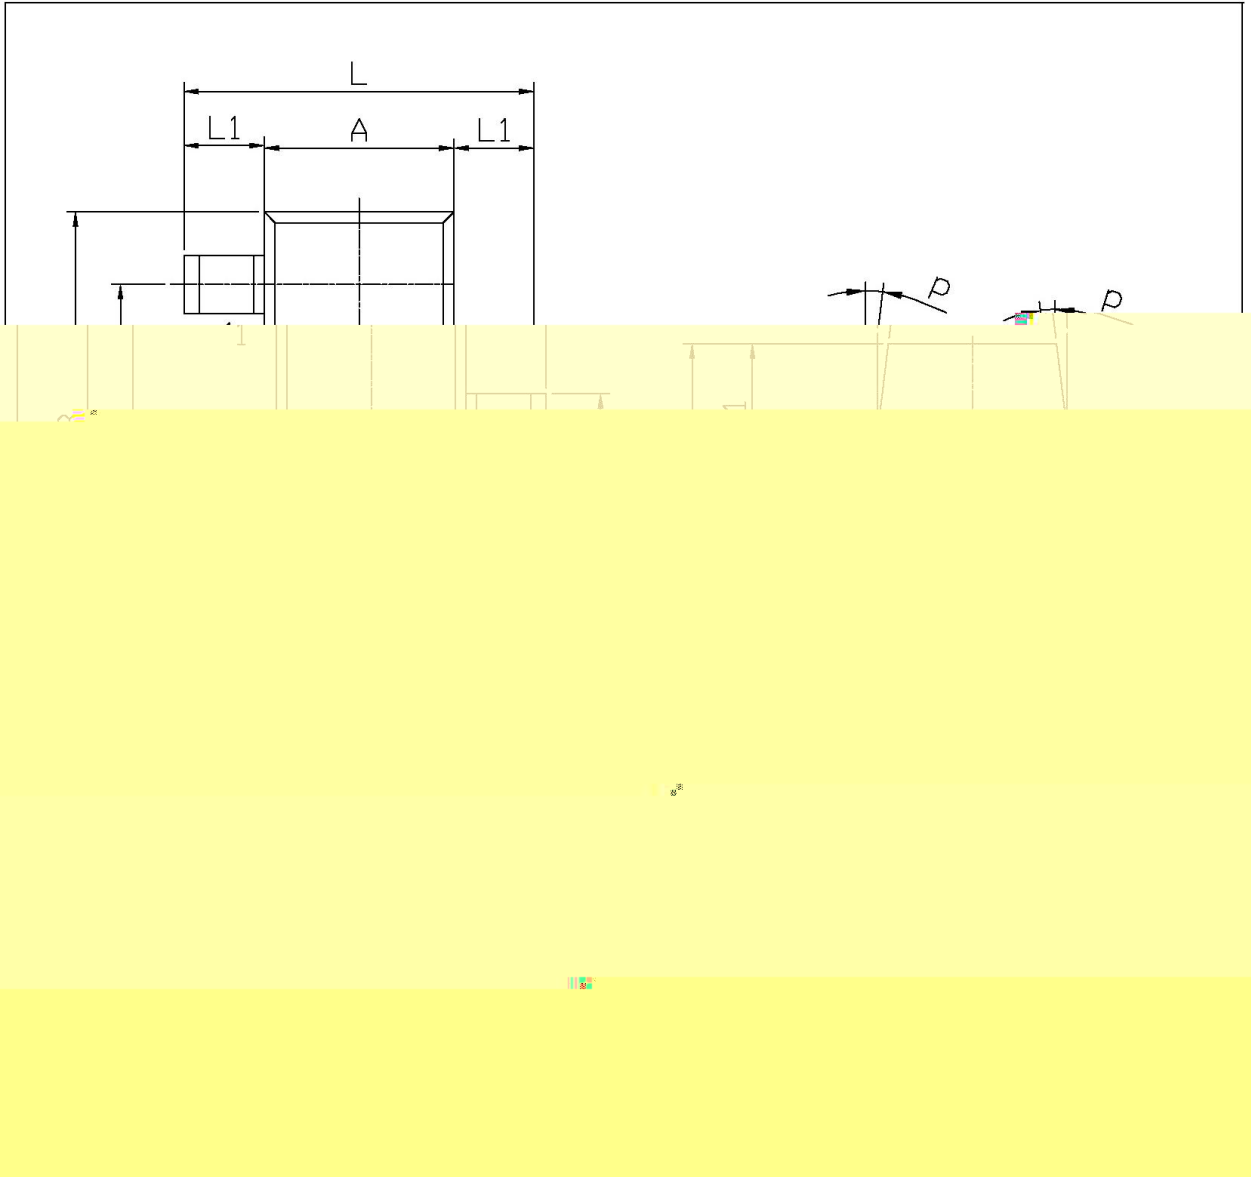


/ Marking Instructions

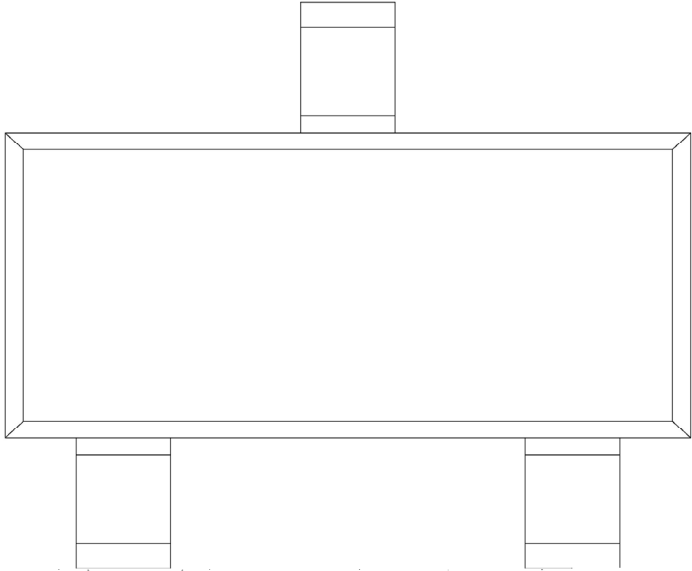

H

(     ) / Temperature Profile for IR Reflow Soldering(Pb-Free)

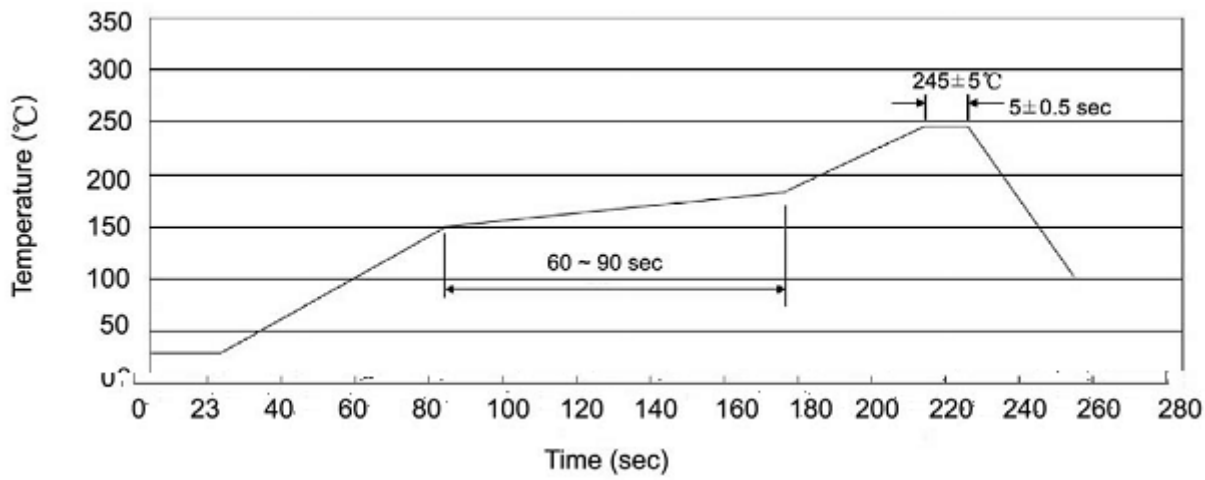

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

包装数量 包装尺寸 :