

/ Descriptions


SOT-89 PNP

/ Features


， 2SD1766

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking

	~	~	~

/ Absolute Maximum Ratings(Ta=25 –)



		~	

*: 40×40×0.7m


/ Electrical Characteristics(Ta=25 –)

		μ				
		μ				
						μ
						μ
	h _{FE}					
	f _T					


/ Electrical Characteristic Curve

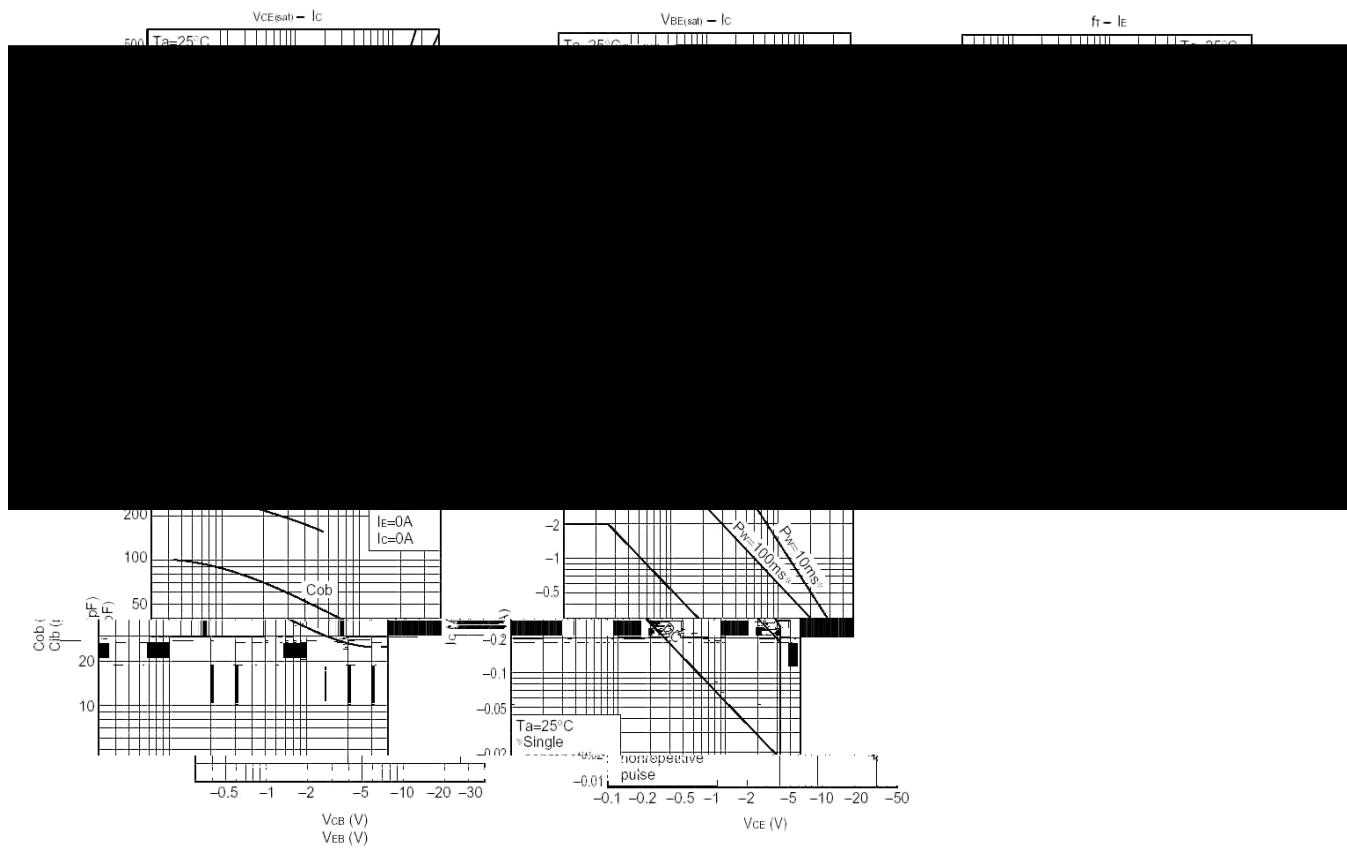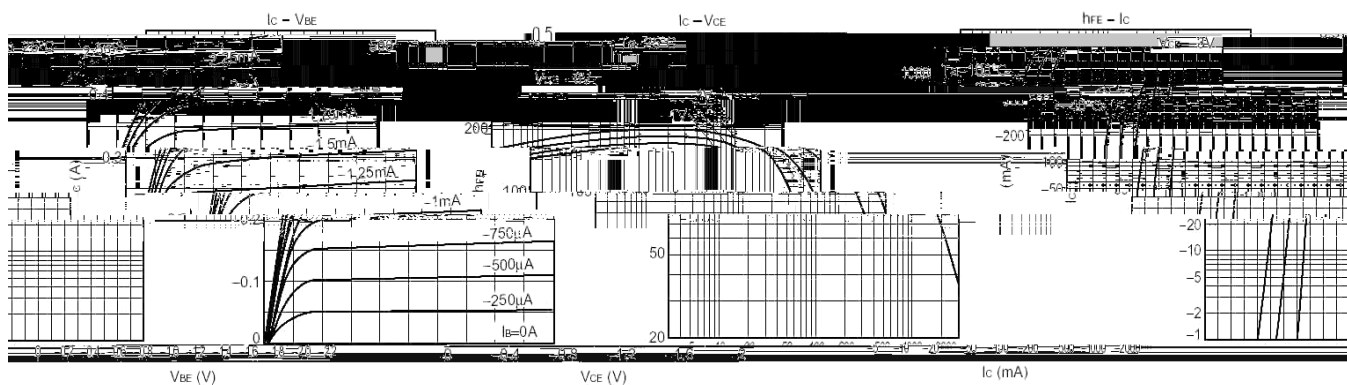

/ Package Dimensions

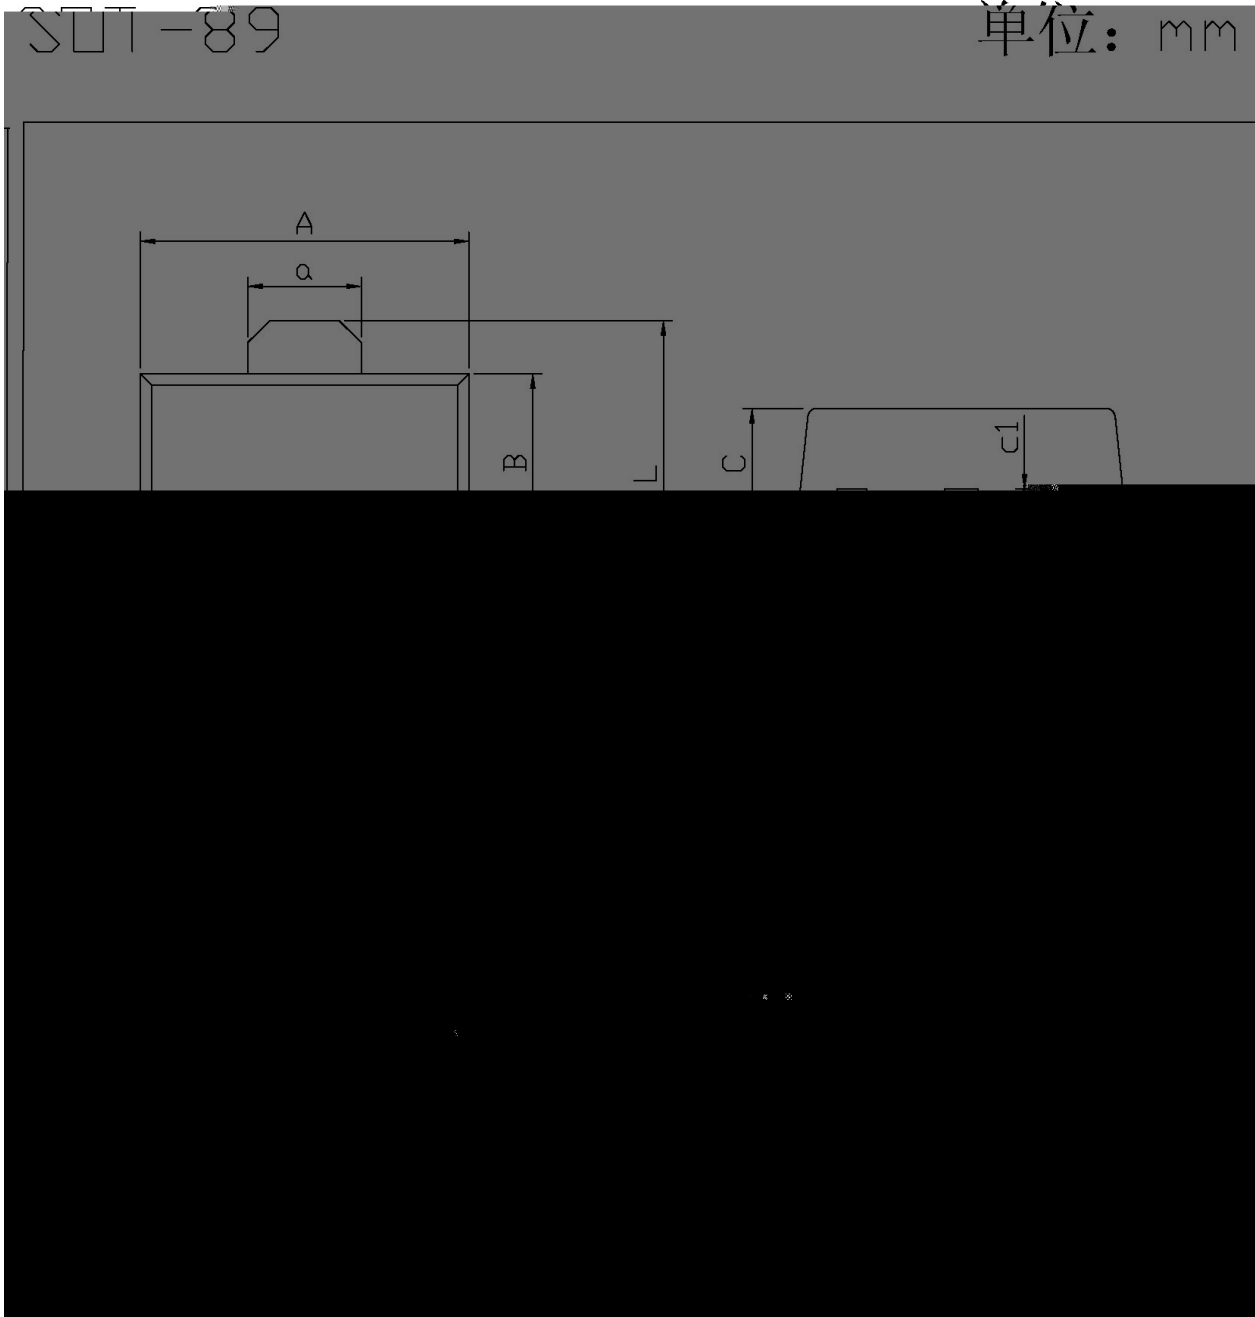


/ Marking Instructions

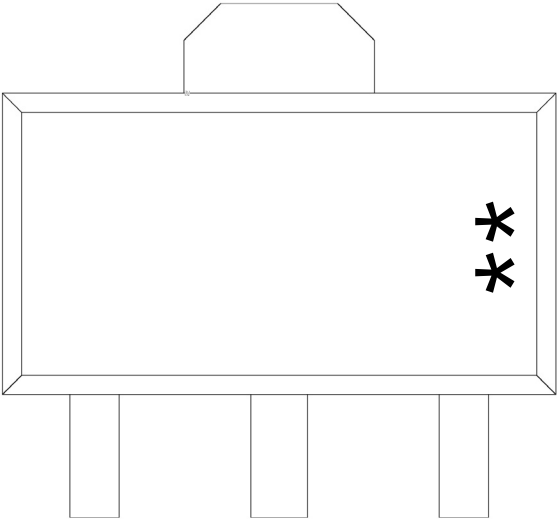

H	
BC	
P	h_{FE}
**	

() / Whp shudwxuh Suriloh iru LU Uhior z Vroghulqj+Se0luhh,

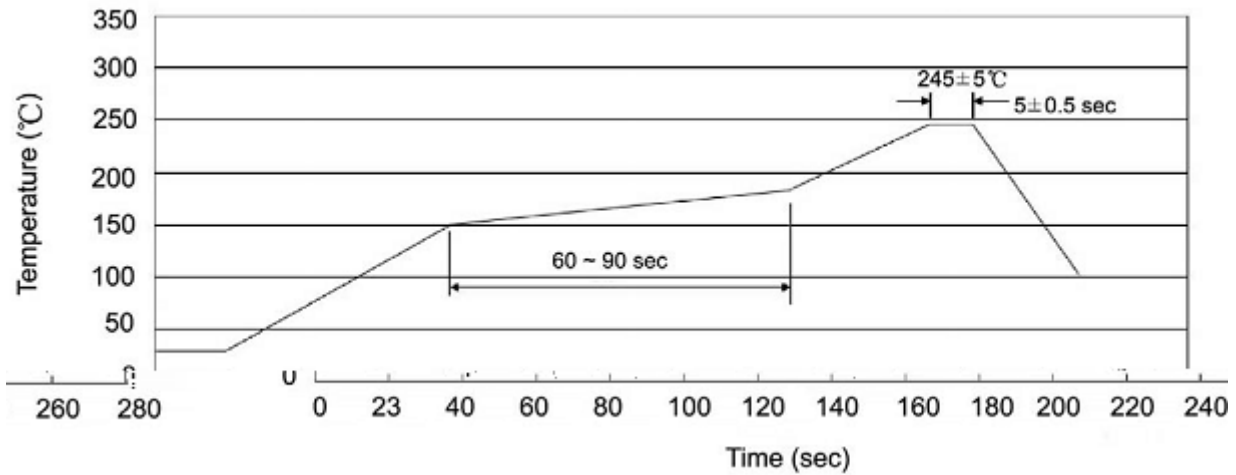 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱
						”		

/ Notices