


TO-126F PNP Silicon PNP transistor in a TO-126F Plastic Package.

$V_{CE(sat)}$, h_{FE}

Low saturation voltage, excellent h_{FE} linearity and high h_{FE} .

Power amplifier and switching applications.



PIN1 Emitter PIN 2 Collector PIN 3 Base


See Marking Instructions.


Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	-50	V
Collector to Emitter Voltage	V_{CEO}	-50	V
Emitter to Base Voltage	V_{EBO}	-5.0	V
Collector Current - Continuous	I_C	-3.0	A
Peak Collector Current – Continuous	I_{CM}	-7.0	A
Base Current - Continuous	I_B	-0.6	A
Collector Power Dissipation	$P_C (T_C=25^\circ C)$	10	W
Collector Power Dissipation	P_C	1.0	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 ~ 150	

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Base Breakdown Voltage	V_{CBO}	$I_C=-100\text{ A}$ $I_E=0$	-50			V
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=-5\text{mA}$ $I_B=0$	-50			V
Emitter to Base Breakdown Voltage	V_{EBO}	$I_E=-100\text{ A}$ $I_C=0$	-5.0			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-50\text{V}$ $I_E=0$			-1.0	A
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-3.0\text{V}$ $I_C=0$			-1.0	A
DC Current Gain	$h_{FE(1)}$	$V_{CE}=-2.0\text{V}$ $I_C=-1.0\text{A}$	100		400	
	$h_{FE(2)}$	$V_{CE}=-2.0\text{V}$ $I_C=-20\text{mA}$	100			
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=-2.0\text{A}$ $I_B=-200\text{mA}$			-0.5	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=-2.0\text{A}$ $I_B=-200\text{mA}$			-2.0	V
Transition Frequency	f_T	$V_{CE}=-5.0\text{V}$ $I_C=-100\text{mA}$		80		MHz
Reverse Transfer Capacitance	C_{Ob}	$V_{CB}=-10\text{V}$ $I_E=0$ $f_T=1.0\text{MHz}$		45		pF

TU-126T

单位: mm

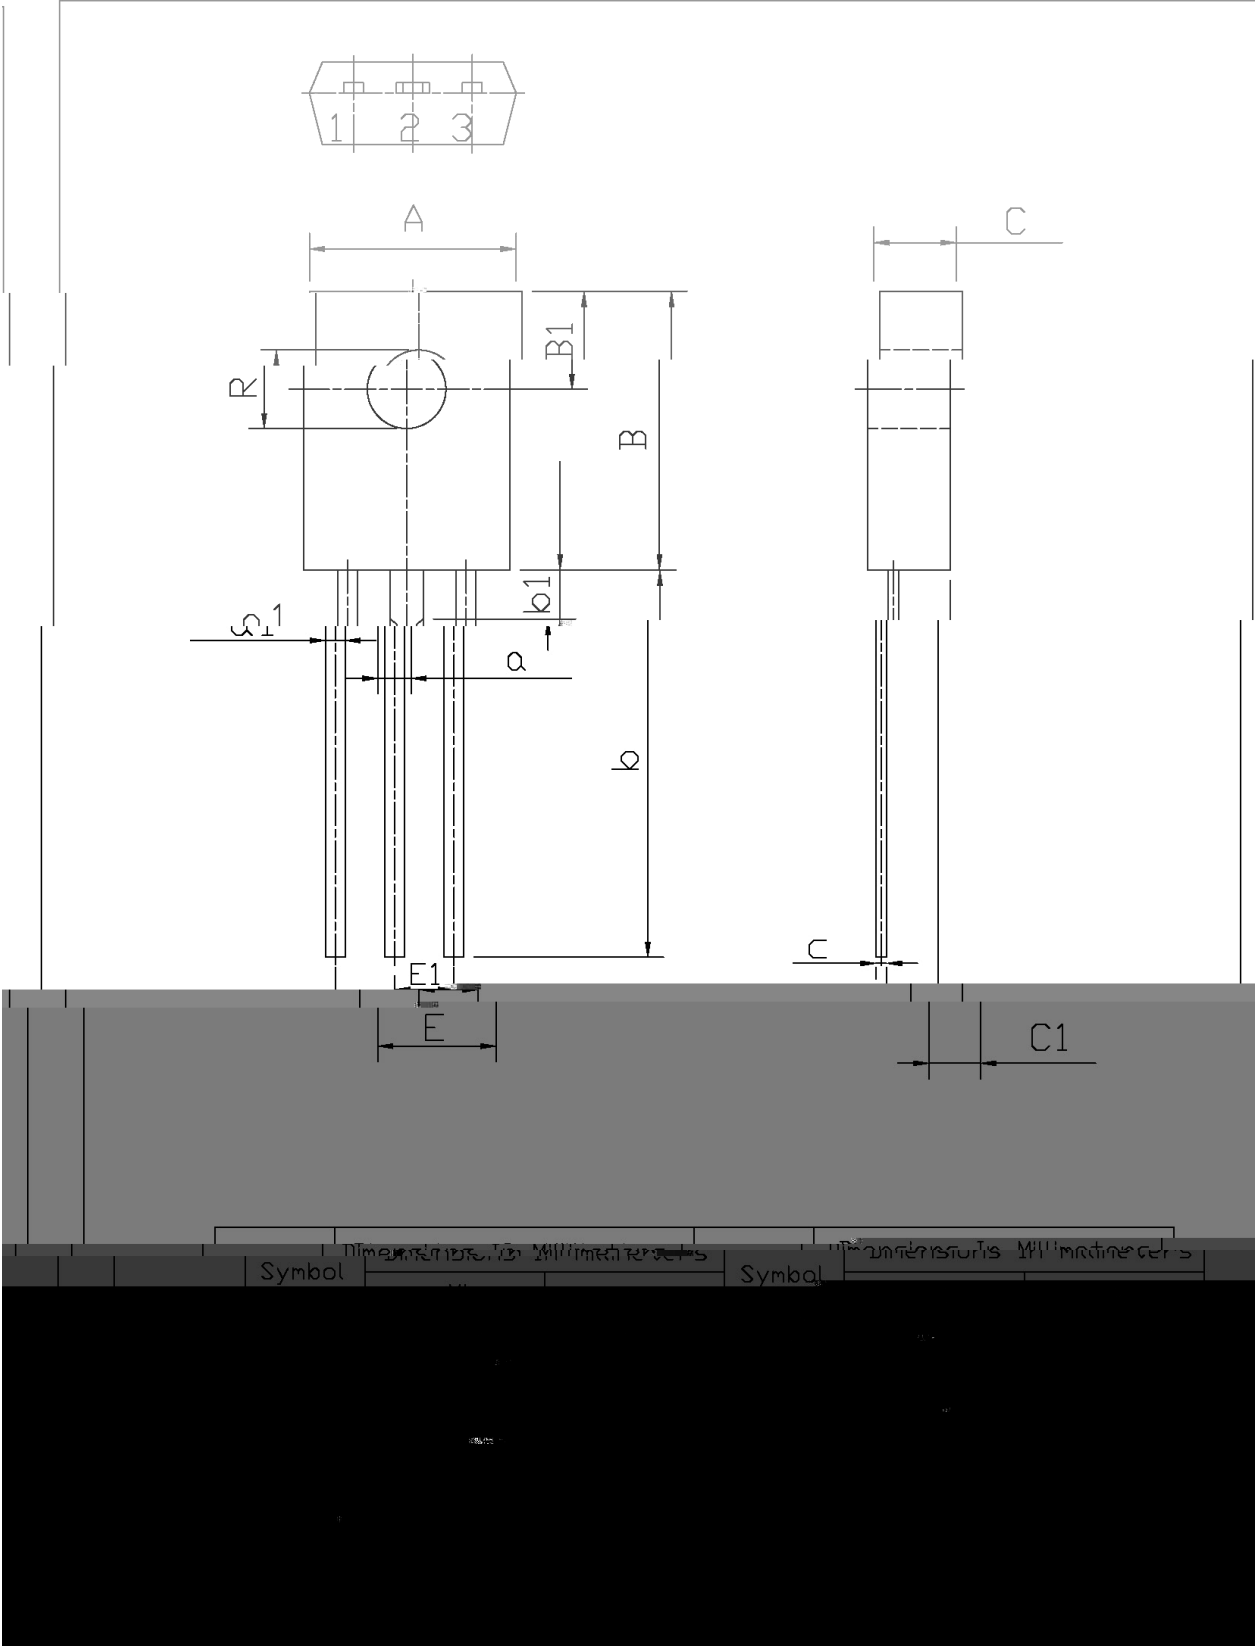

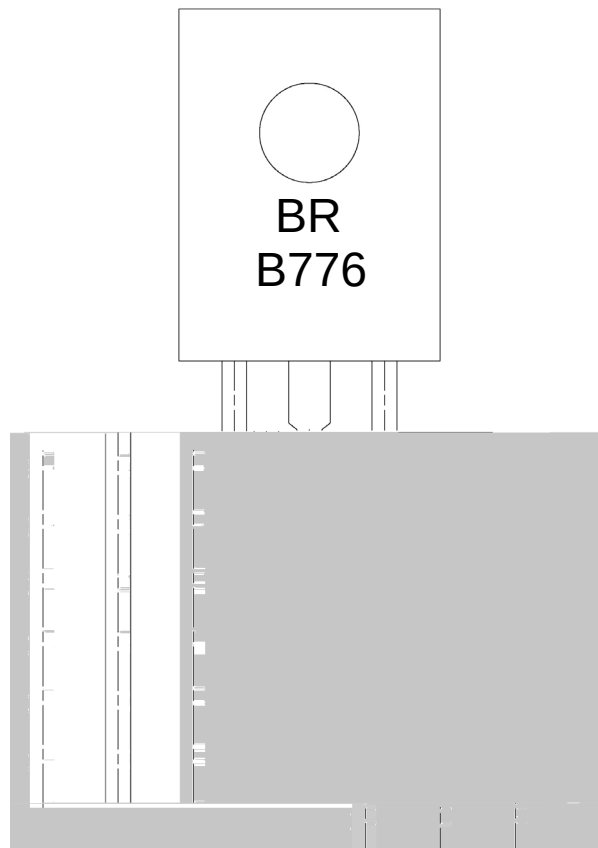

BR

B776

Note:

BR: Company Code

B776: Product Type.

****: Lot No. Code, code change with Lot No.



- 1

25 150

60 90sec;
- 2

255±5

5±0.5sec;
- 3

2 10

/sec.
- Note:

1.Preheating:25~150 , Time:60~90sec.

2.Peak Temp.:255±5 , Duration:5±0.5sec.

3. Cooling Speed: 2~10 /sec.

270±5

10±1 sec.

Temp.:270±5

Time:10±1 sec

/ BULK

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ TUBE

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		