

/ Descriptions


TO-220 PNP

/ Features


， 2SD880

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking


/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
			℃

/ Electrical Characteristics(Ta=25)

						μ
						μ
						μ

/ Electrical Characteristic Curve

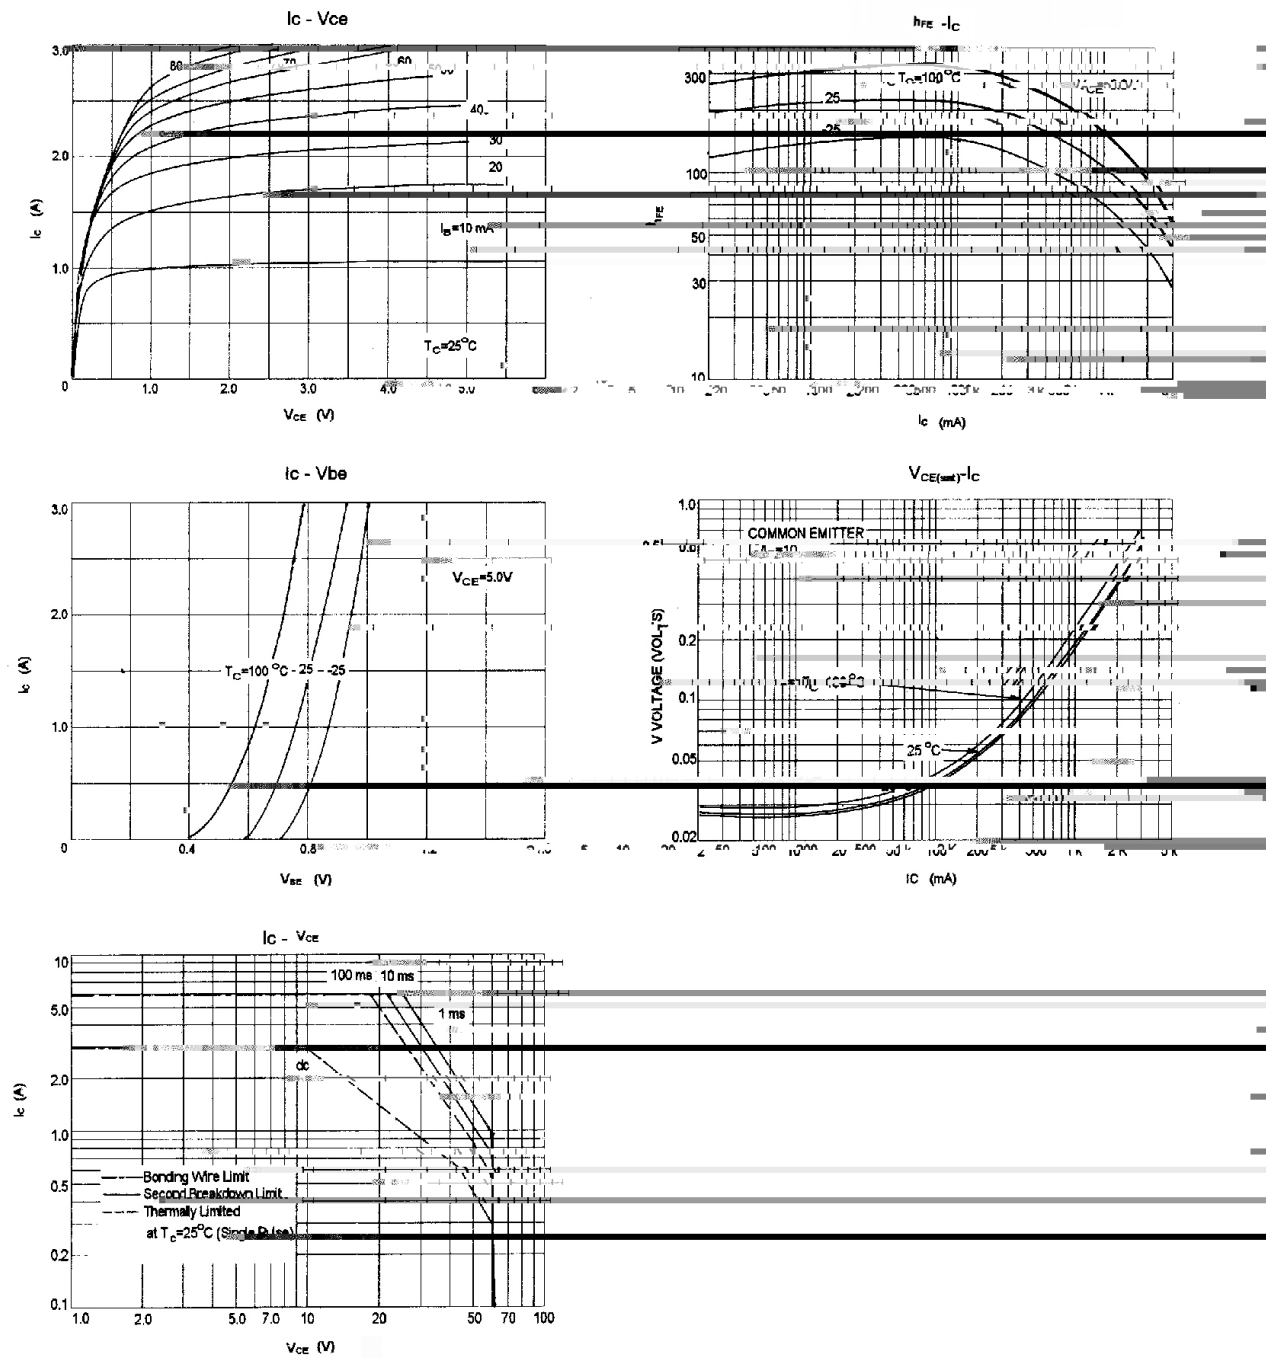


Technical drawing of a 220V power plug. The drawing shows a side view and a top view. Dimensions are given in millimeters (mm). The drawing is labeled '220' and '单位: mm'.

Dimensions (mm):

- A: 9.8 - 10.2
- C: 1.2 - 1.4
- L: 35.6 - 36.4
- B1: 6.3 - 6.7
- C1: 15.7 - 16.1
- a: 9.0 - 9.4
- a1: 13.2 - 13.6
- b1: 10.6 - 11.0
- k: 14.5 - 14.9

Symbol		Dimensions in millimeters		Symbol		Dimensions in millimeters	
		Min	Max			Min	Max
A		9.8	10.2	C		1.2	1.4
L		35.6	36.4	B1		6.3	6.7
C1		15.7	16.1	B2		15.7	16.1
a		9.0	9.4	a1		13.2	13.6
b1		10.6	11.0	k		14.5	14.9

/ Marking Instructions

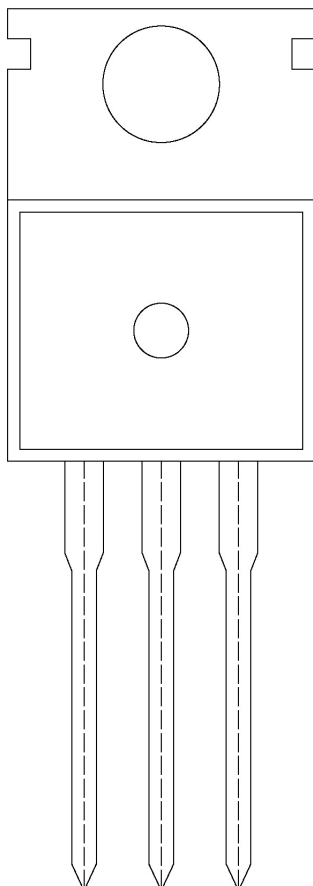


BR

B834

O:

 h_{FE}

() / Temperature Profile for Dip Soldering(Pb-Free)

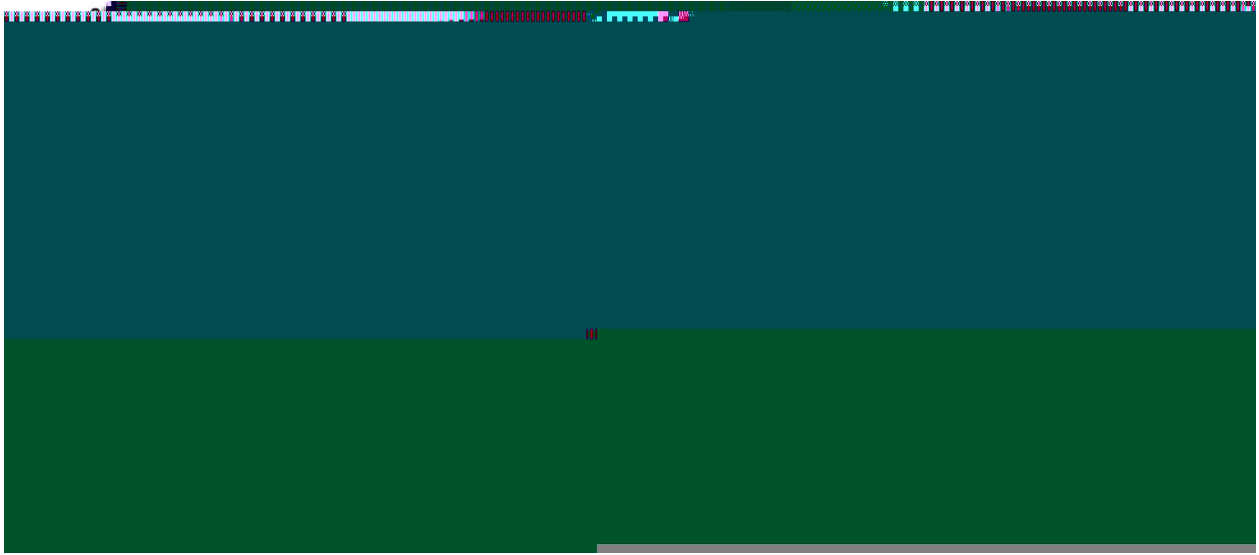 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

°C

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只袋	袋盒	只盒	盒箱	只箱	袋	盒	箱

封装形式	包装数量					包装尺寸		
	只 套管	套管 盒	只 盒	盒 箱	只 箱	套管	盒	箱

/ Notices