


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking

	~	~	~


/ Absolute Maximum Ratings(Ta=25)

		~	

/ Electrical Characteristics(Ta=25)

						μ
						μ


/ Electrical Characteristic Curve

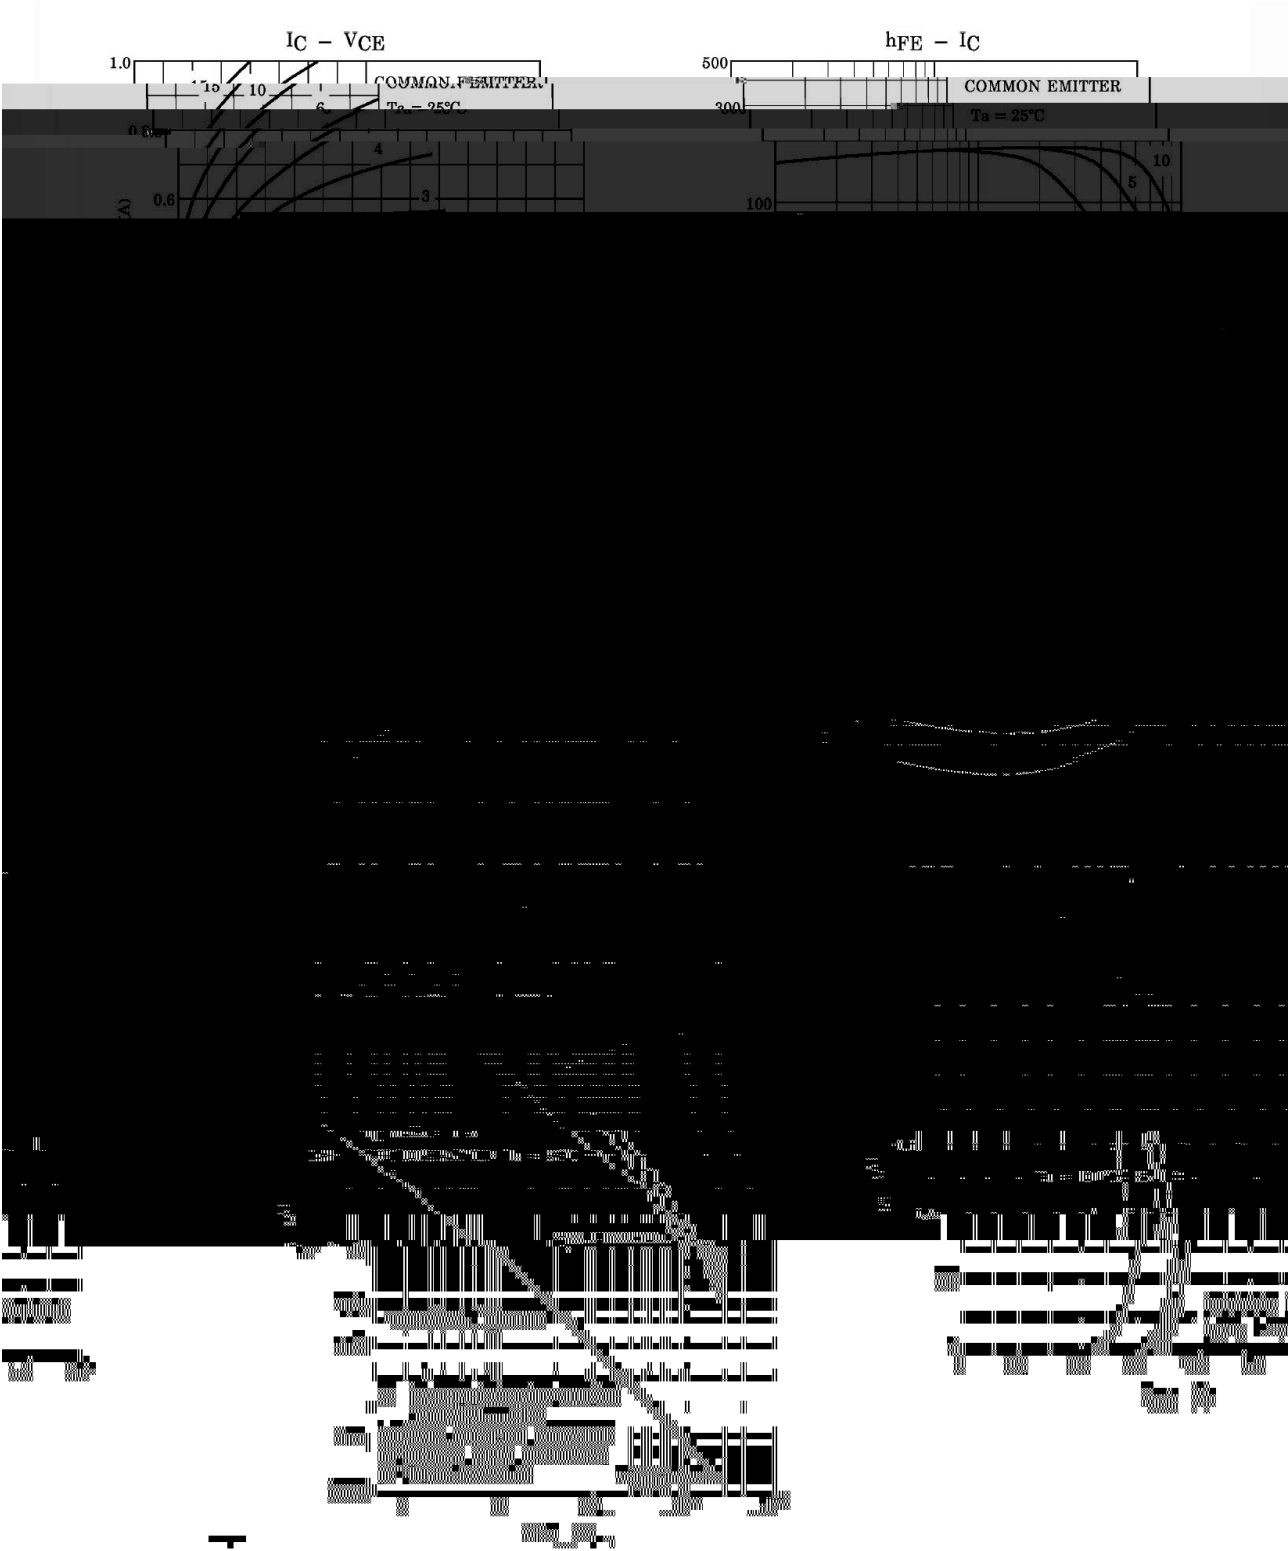


/ Package Dimensions

SOT-89


单位: mm

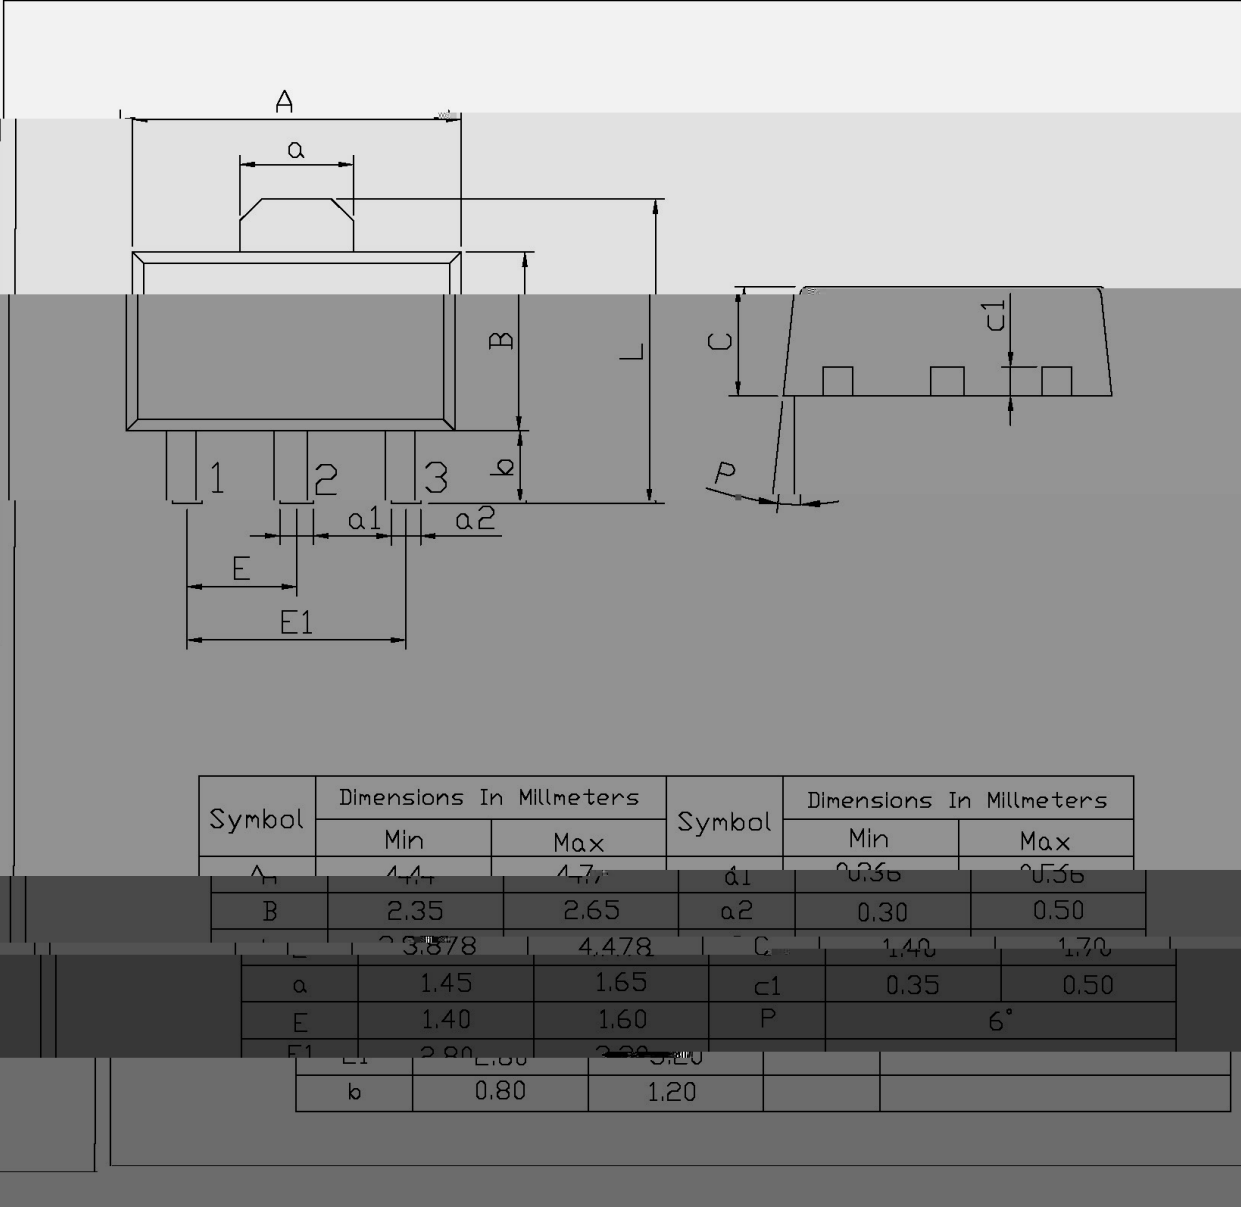

/ Marking Instructions

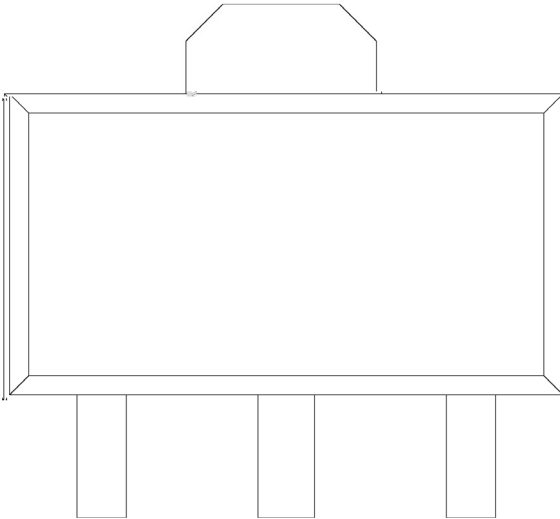

() / b n o r o o d f o f b i i a b f d d b

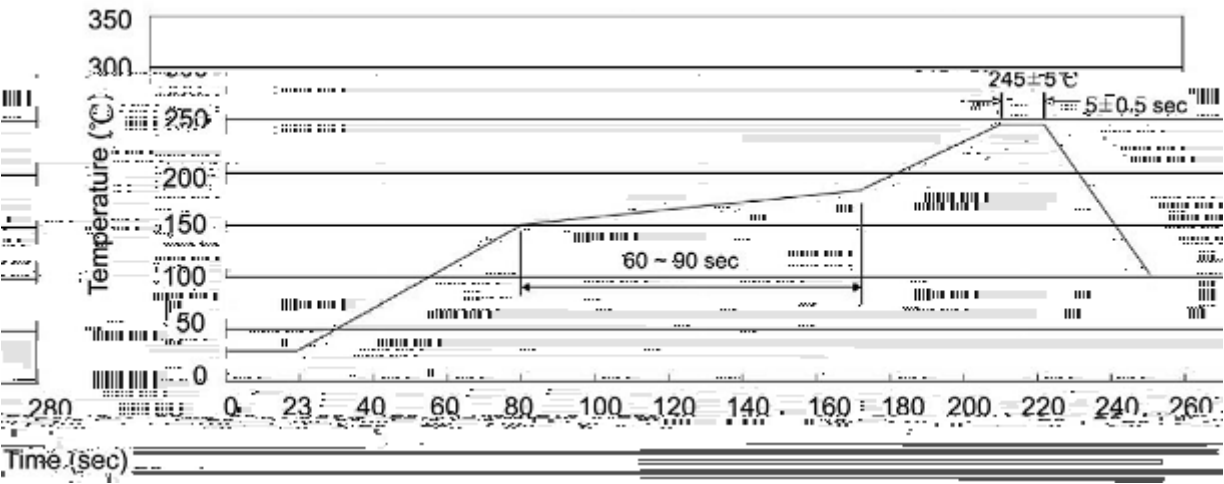

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

β m ù ´	g m ô h					g m d Ê !		
	Units/Reel / í	Reels/Inner Box í / ç	Units/Inner Box / ç	Inner Boxes/Outer Box ç / ±	Units/Outer Box / ±	Reel	Inner Boxç	Outer Box±
SOT-89	1,000	7	7,000	6	42,000	7" ×12	180×120×180	390×85×205

/ Notices