

/ Descriptions


TO-126F NPN

/ Features

V_{CEO} 60-80W 2SA1358

/ Applications

/ Equivalent Circuit



/ Pinning



/ h_{FE} Classifications & Marking

	~	~







/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
		~	℃


/ Electrical Characteristics(Ta=25)


						μ
						μ

/ Electrical Characteristic Curve

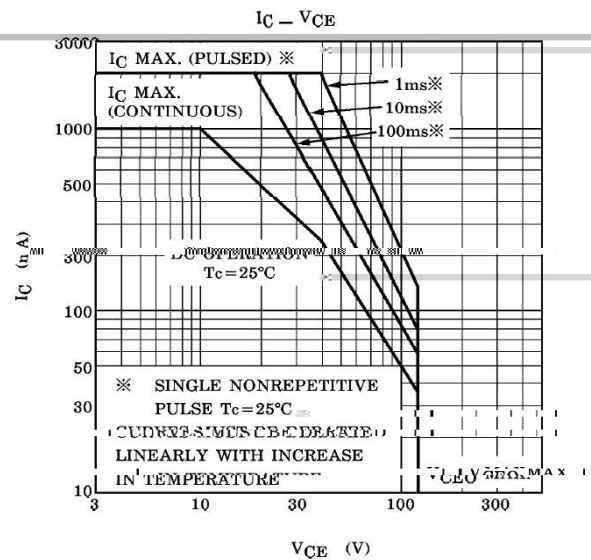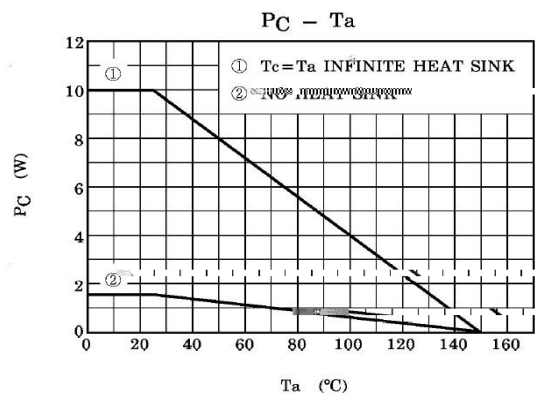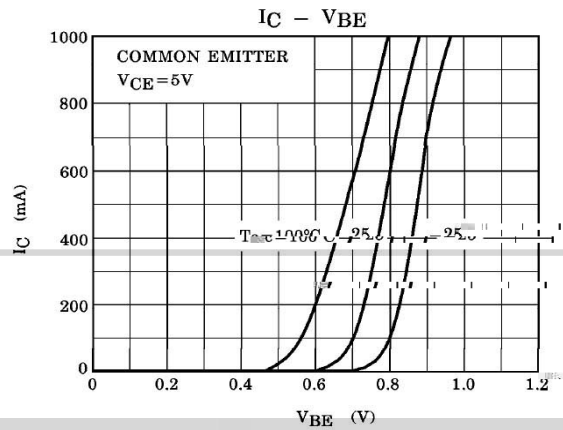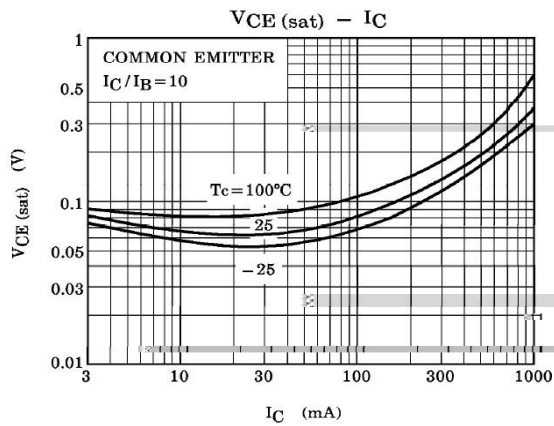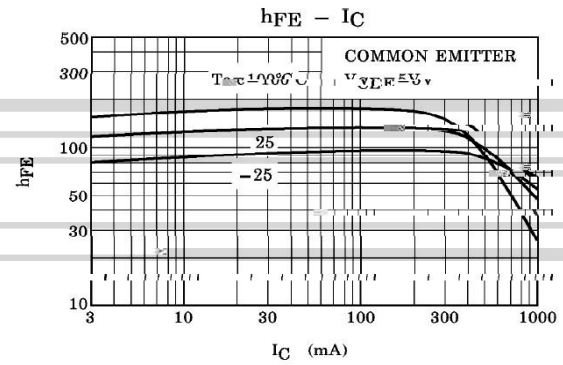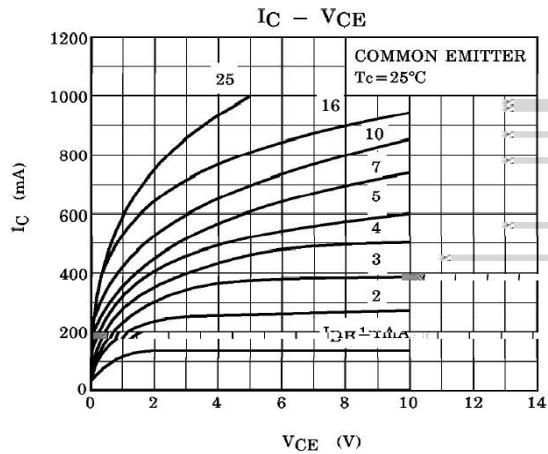


/ Package Dimensions

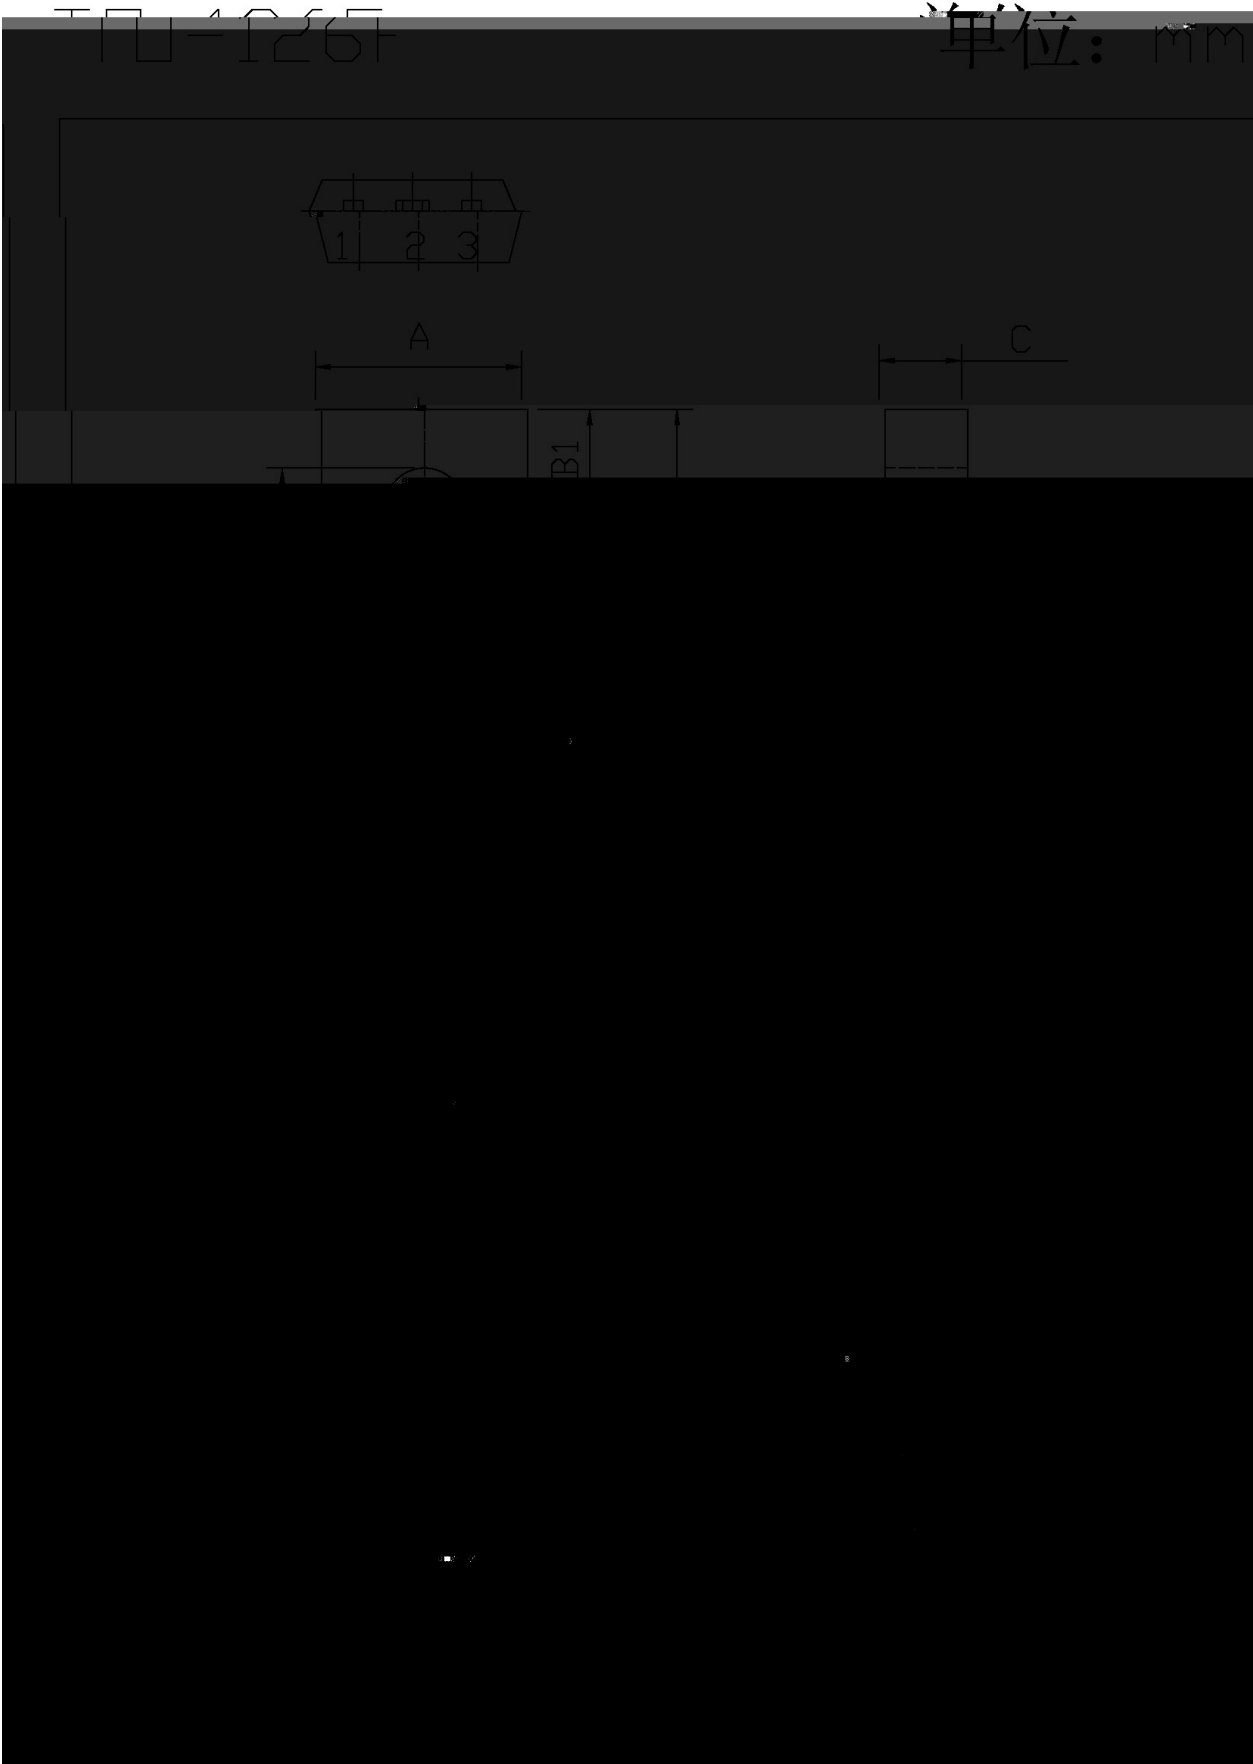

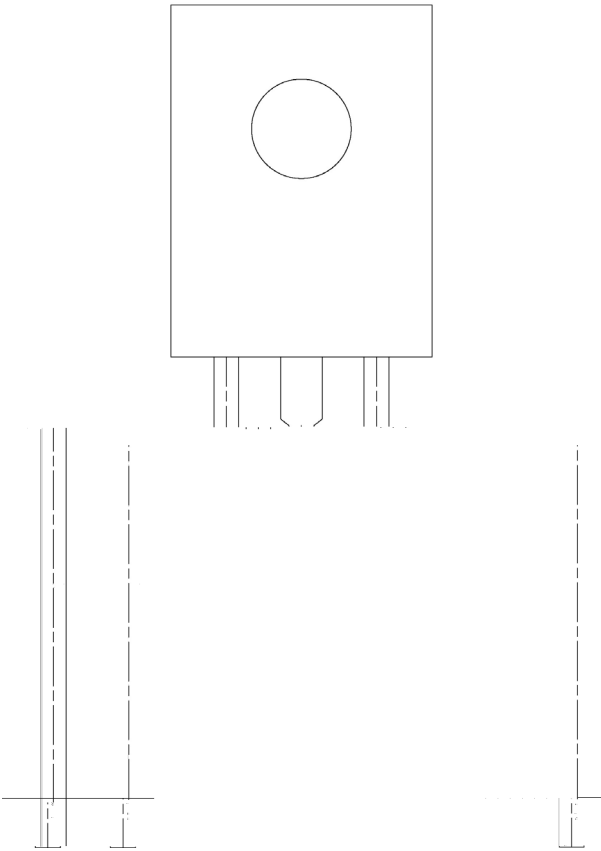

() / Temperature Profile for Dip Soldering(Pb-Free)

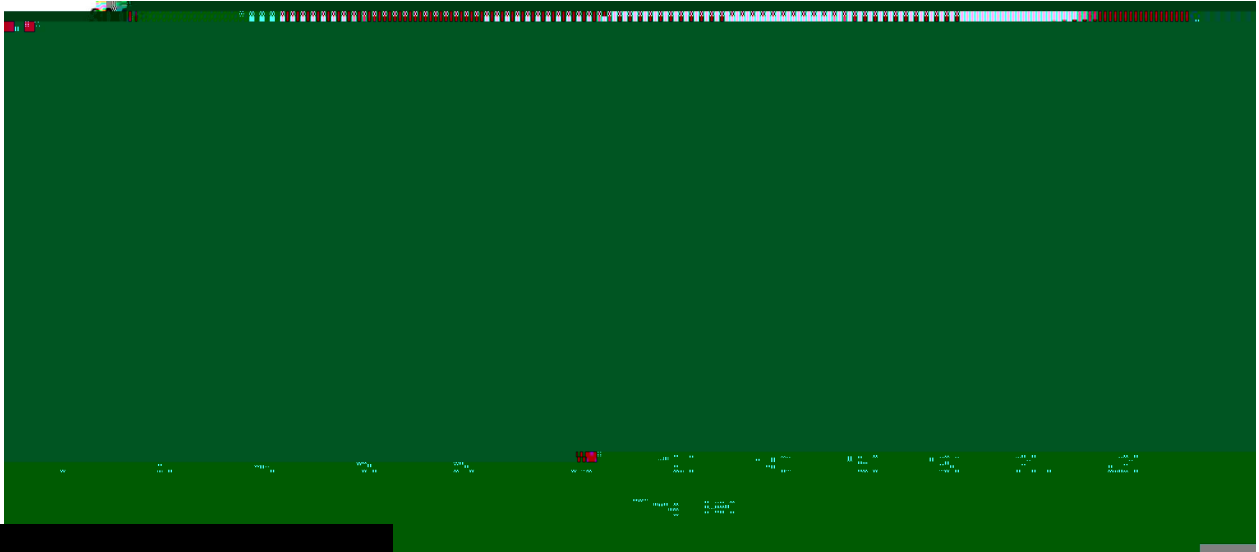

—

 $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

+

 $\pm$

°C

包装数量			包装尺寸		
Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
1000	5	15,000	135×190	237×172×102	560×245×195

包装数量			包装尺寸		
Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱
1,690	5	8,450	532×31×5.6	555×164×50	575×290×180