

/ Descriptions

WR0553I MM QSQ æ M y s ll 1 Silicon NPN transistor in a TO-220F Plastic Package.


/ Features

High breakdown voltage, excellent current characteristics.


/ Applications

TV vertical output, audio output driver and general purpose amplifier applications.

/ Equivalent Circuit



/ Pinning



PIN1 χ Base PIN 2 χ Collector PIN 3 χ Emitter

/ h_{FE} Classifications & Marking

M 1 " See Marking Instructions.


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	200	V
Collector to Emitter Voltage	V_{CEO}	200	V
Emitter to Base Voltage	V_{EBO}	6.0	V
Collector Current - Continuous	I_C	2.0	A
Base Current - Continuous	I_B	1.0	A
Collector Power Dissipation	$P_C(T_c=25)$	25	W
Junction Temperature	T_j	150	
Storage Temperature Range	T_{stg}	-55 ~ 150	


/ Electrical Characteristics(Ta=25)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector to Emitter Breakdown Voltage	V_{CEO}	$I_C=25mA$ $I_E=0$	200			V
Collector Cut-Off Current	I_{CBO}	$V_{CB}=200V$ $I_E=0$			10	μA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=6.0V$ $I_C=0$			10	μA
DC Current Gain	h_{FE}	$V_{CE}=10V$ $I_C=700mA$	60		200	
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=700mA$ $I_B=70mA$			1.0	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=500mA$ $I_B=50mA$		0.9	1.2	V
Transition Frequency	f_T	$V_{CE}=12V$ $I_C=200mA$		15		MHz
Collector output capacitance	C_{ob}	$V_{CB}=10V$ $f=1.0MHz$		35		pF

/ Electrical Characteristic Curve

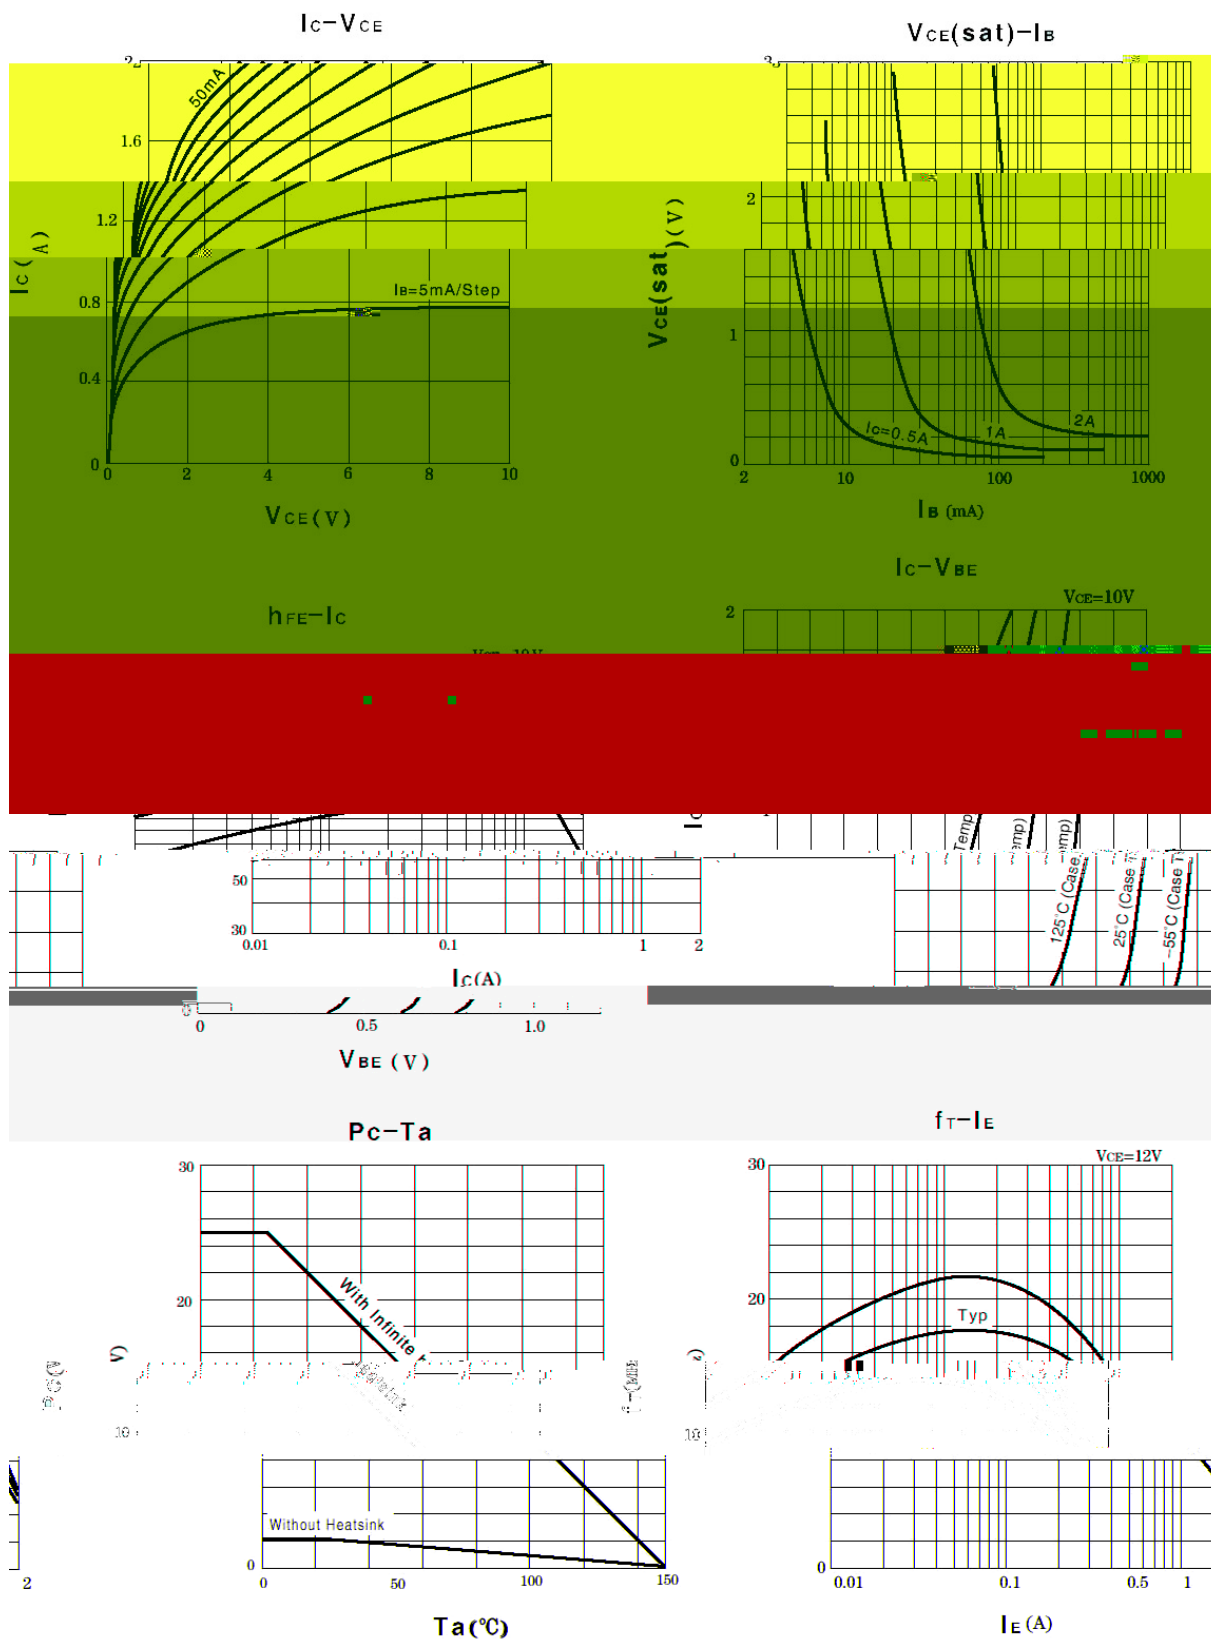


/ Package Dimensions

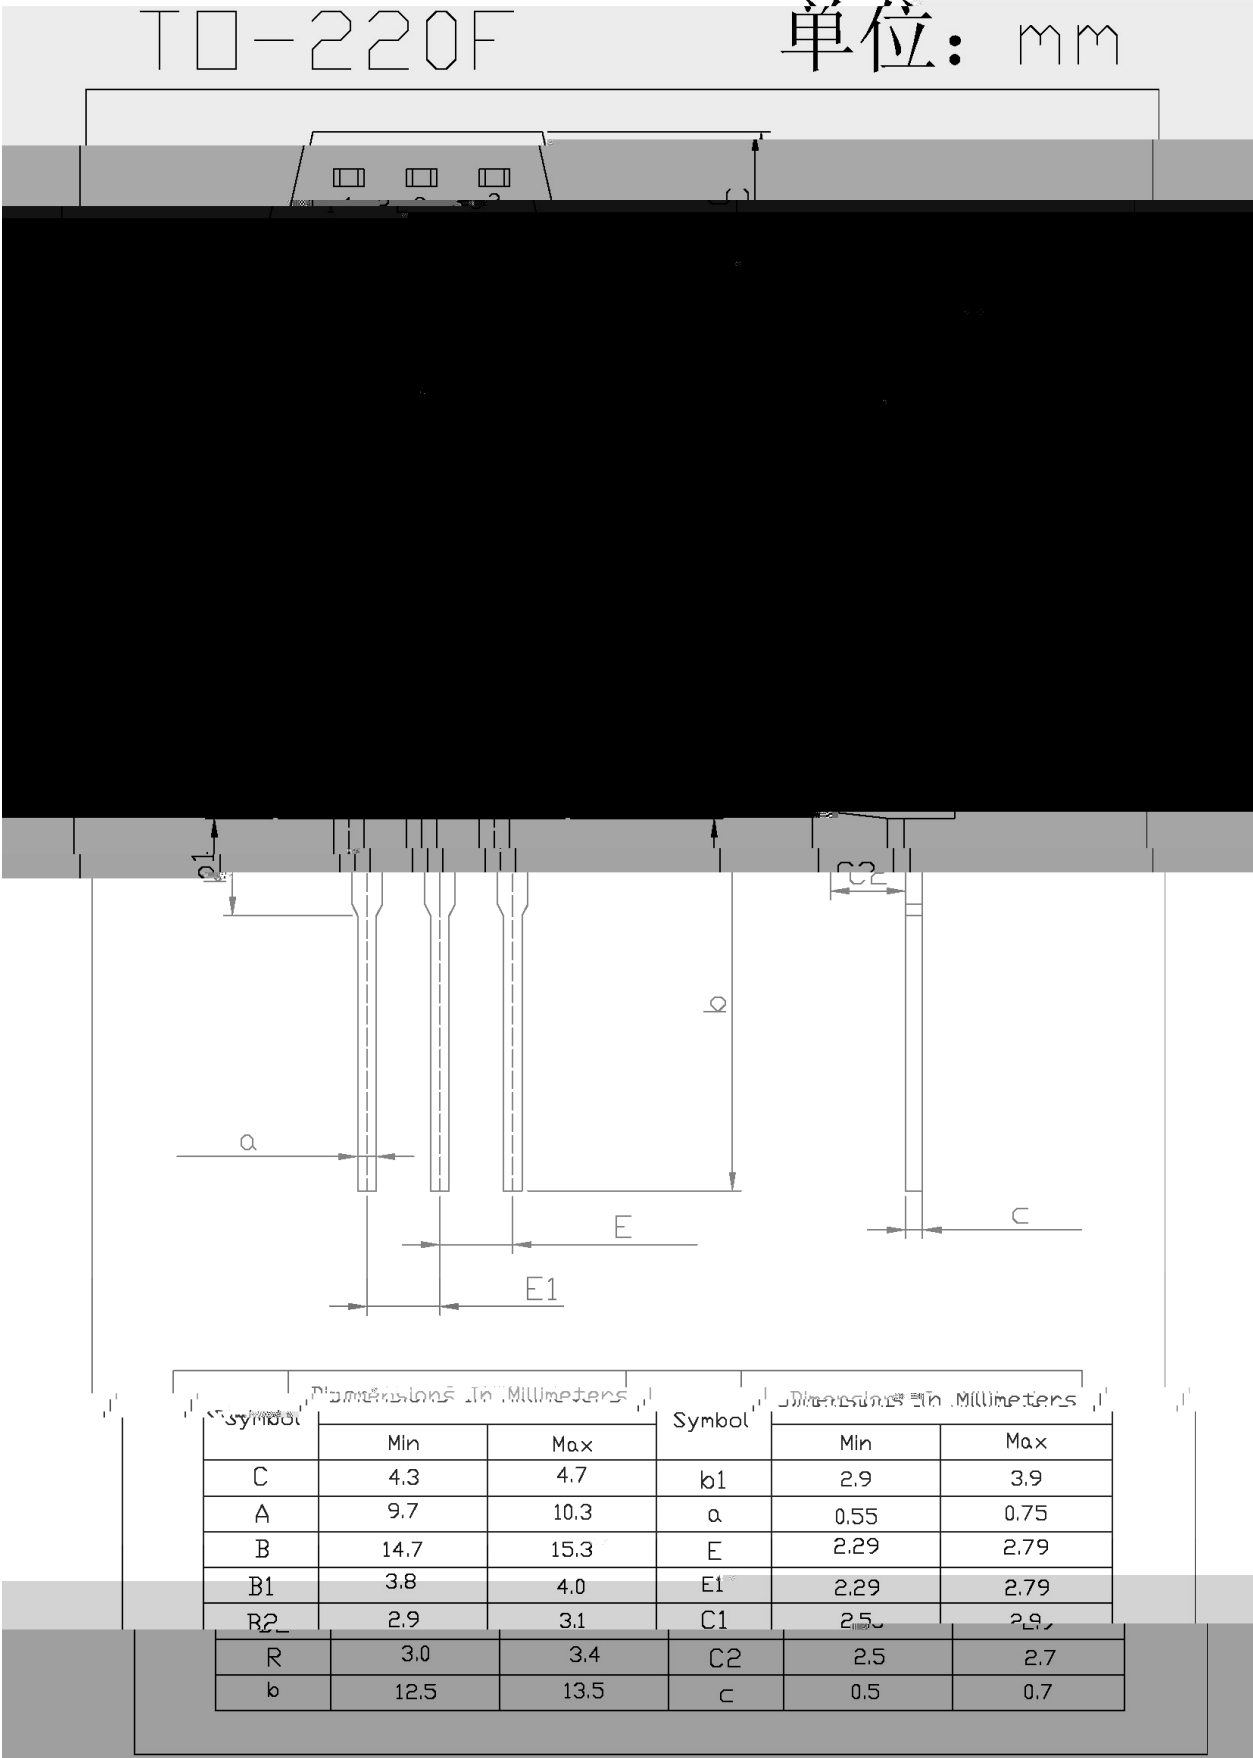

****.

Lot No. Code, code change with Lot No.

() / Temperature Profile for Dip Soldering(Pb-Free)

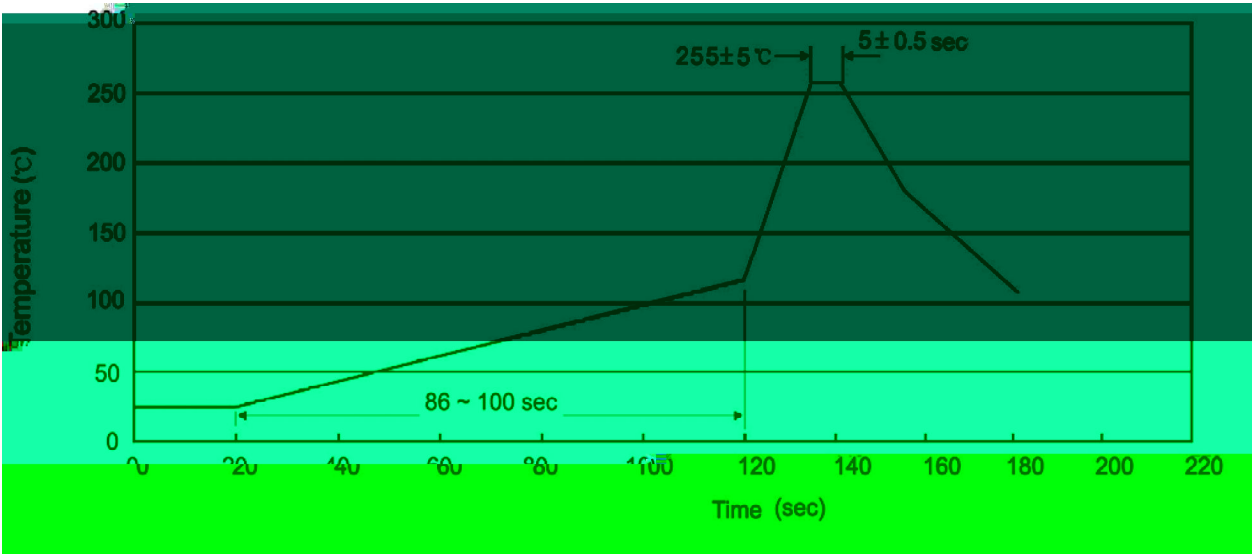

- ” X
1. 25~150 °C, Time: 60~90sec;
 2. 255±5 °C, Duration: 5±0.5sec;
 3. Cooling Speed: 2~10 °C/sec.

- Note:
1. Preheating: 25~150 °C, Time: 60~90sec.
 2. Peak Temp.: 255±5 °C, Duration: 5±0.5sec.
 3. Cooling Speed: 2~10 °C/sec.

/ Resistance to Soldering Heat Test Conditions

□ 270±5 °C, Time: 10±1 sec. Temp.: 270±5 Time: 10±1 sec

/ Packaging SPEC.

” Q T Y / BULK

Package Type 封装形式	Units 包装数量		Dimension 包装尺寸 (unit: mm ³)
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	