



/ Descriptions**/ Features****/ Applications****/ Equivalent Circuit****/ Pinning****/ h_{FE} Classifications & Marking**


/ Absolute Maximum Ratings(Ta=25)

	℃		
			℃
		~	℃


/ Electrical Characteristics(Ta=25)

2SC4544


/ Package Dimensions

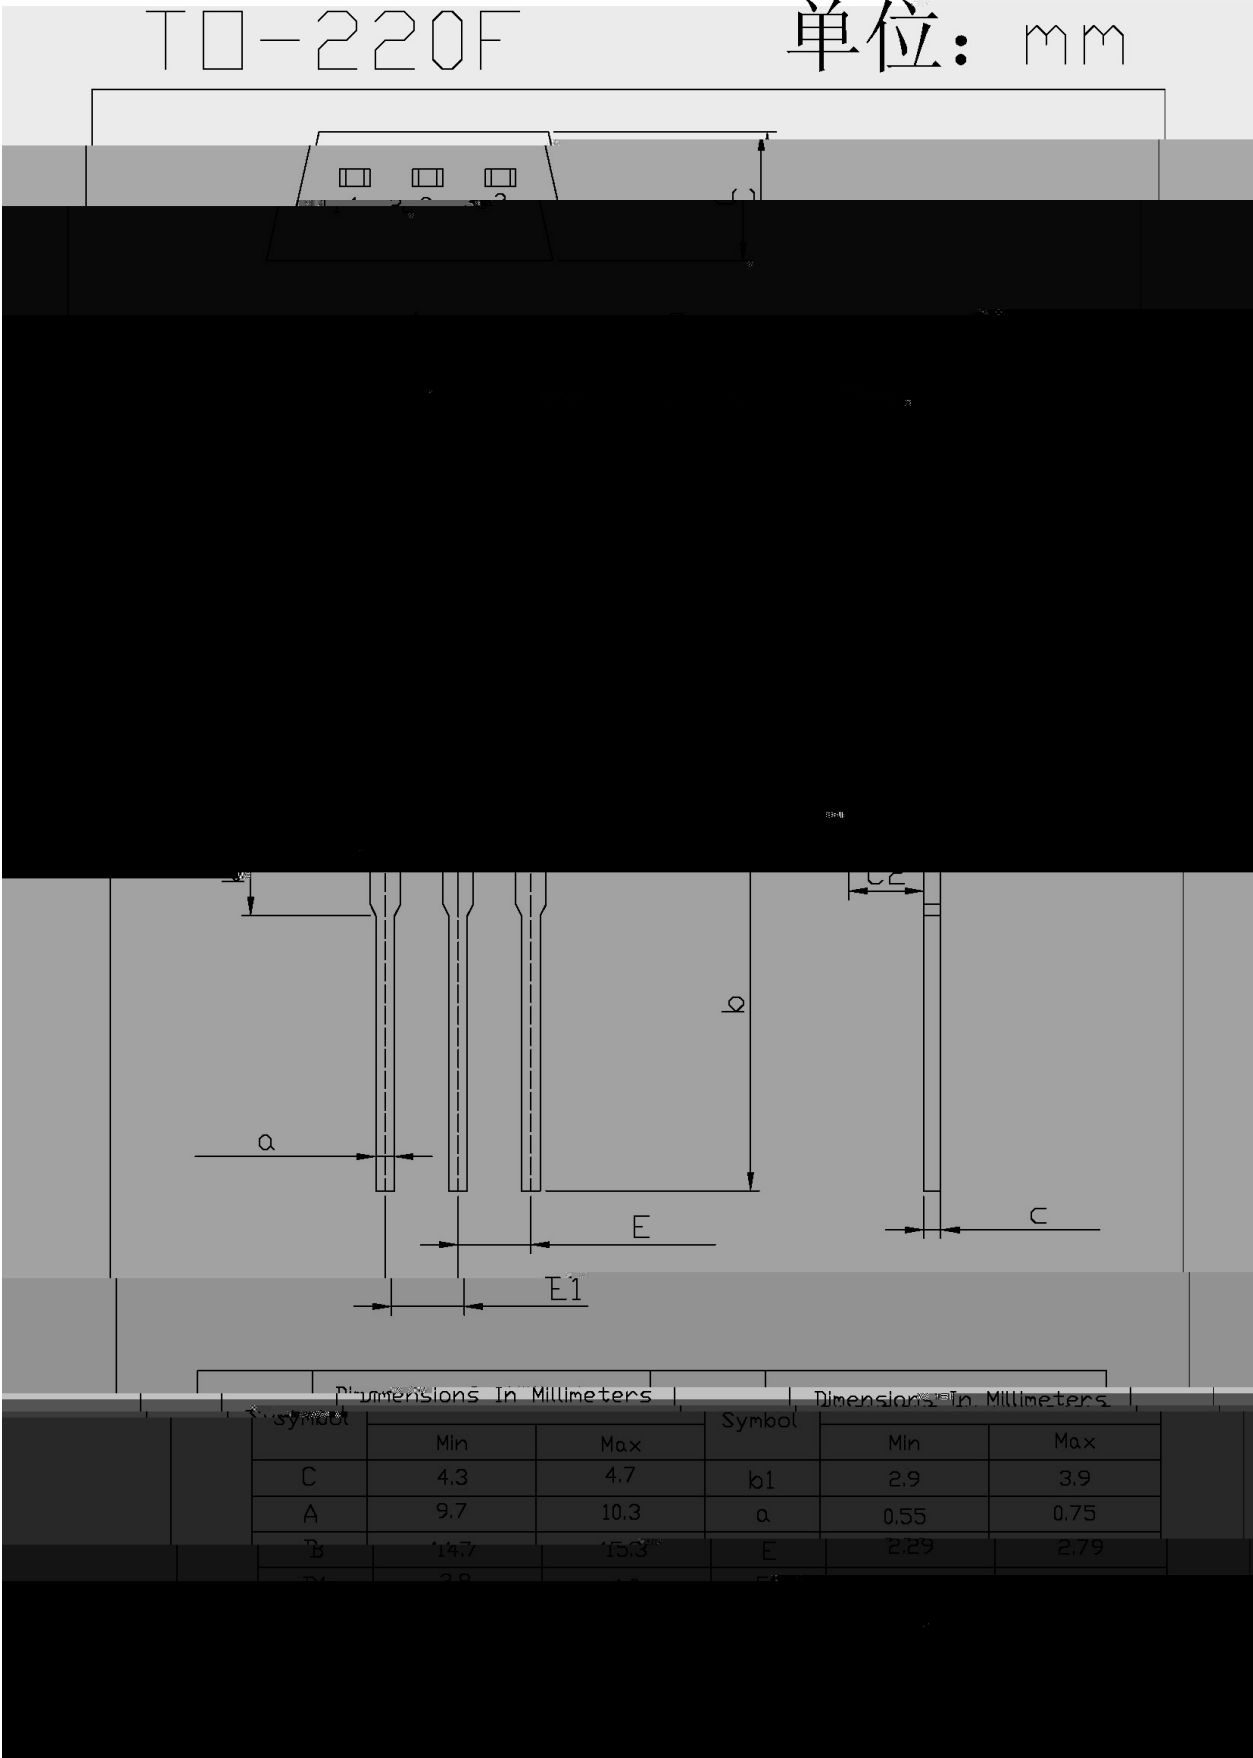

/ Marking Instructions

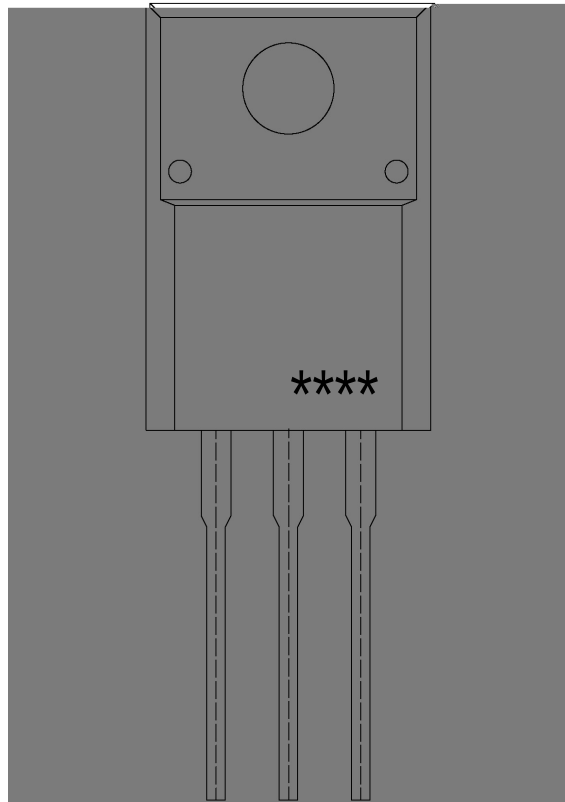

() / Temperature Profile for Dip Soldering(Pb-Free)

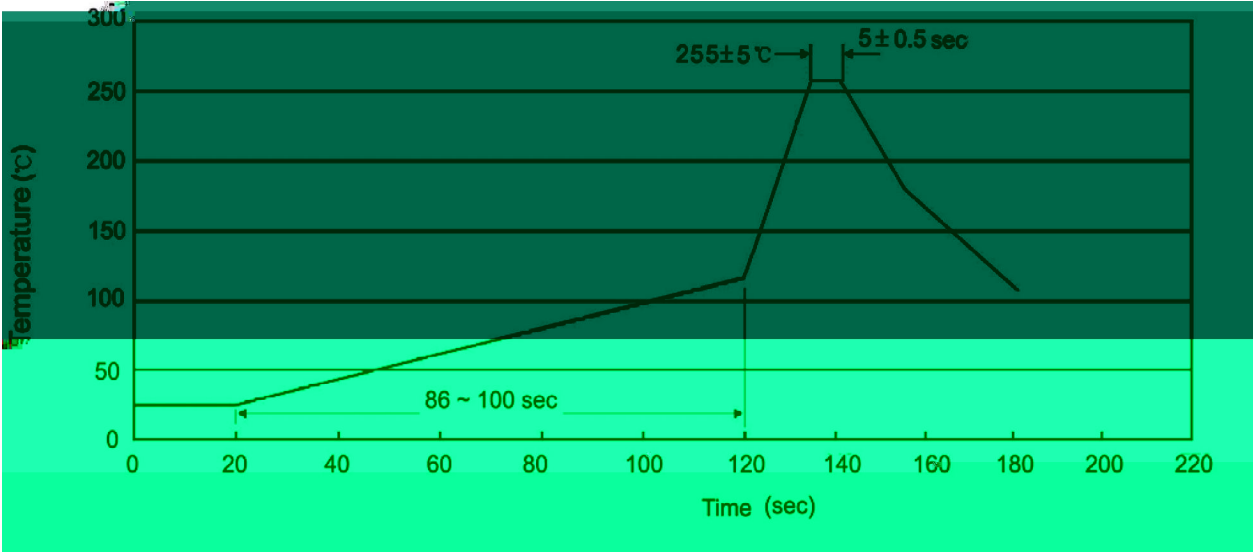

/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

封装形式	包装数量				包装尺寸	
	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Inner Units/Bag 只/袋	mm	mm
	1000	10	10000	1000	16.0	8.0