

2SC458

/ Descriptions


TO-92 NPN

/ Features

2SA1029

/ Applications

/ Equivalent Circuit



/ Pinning







/ hFE Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

		μ				
		∞				
		μ				
						μ
						μ
		Ω				
						Ω
						×
						μ


/ Electrical Characteristic Curve

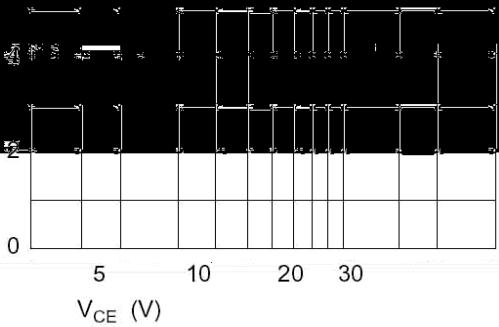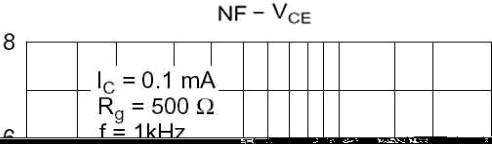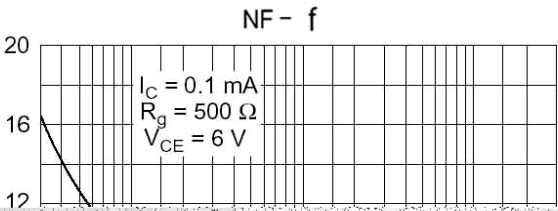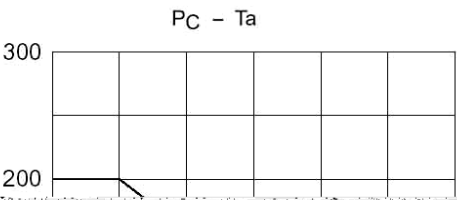


/ Package Dimensions

TO-92

Unit: mm

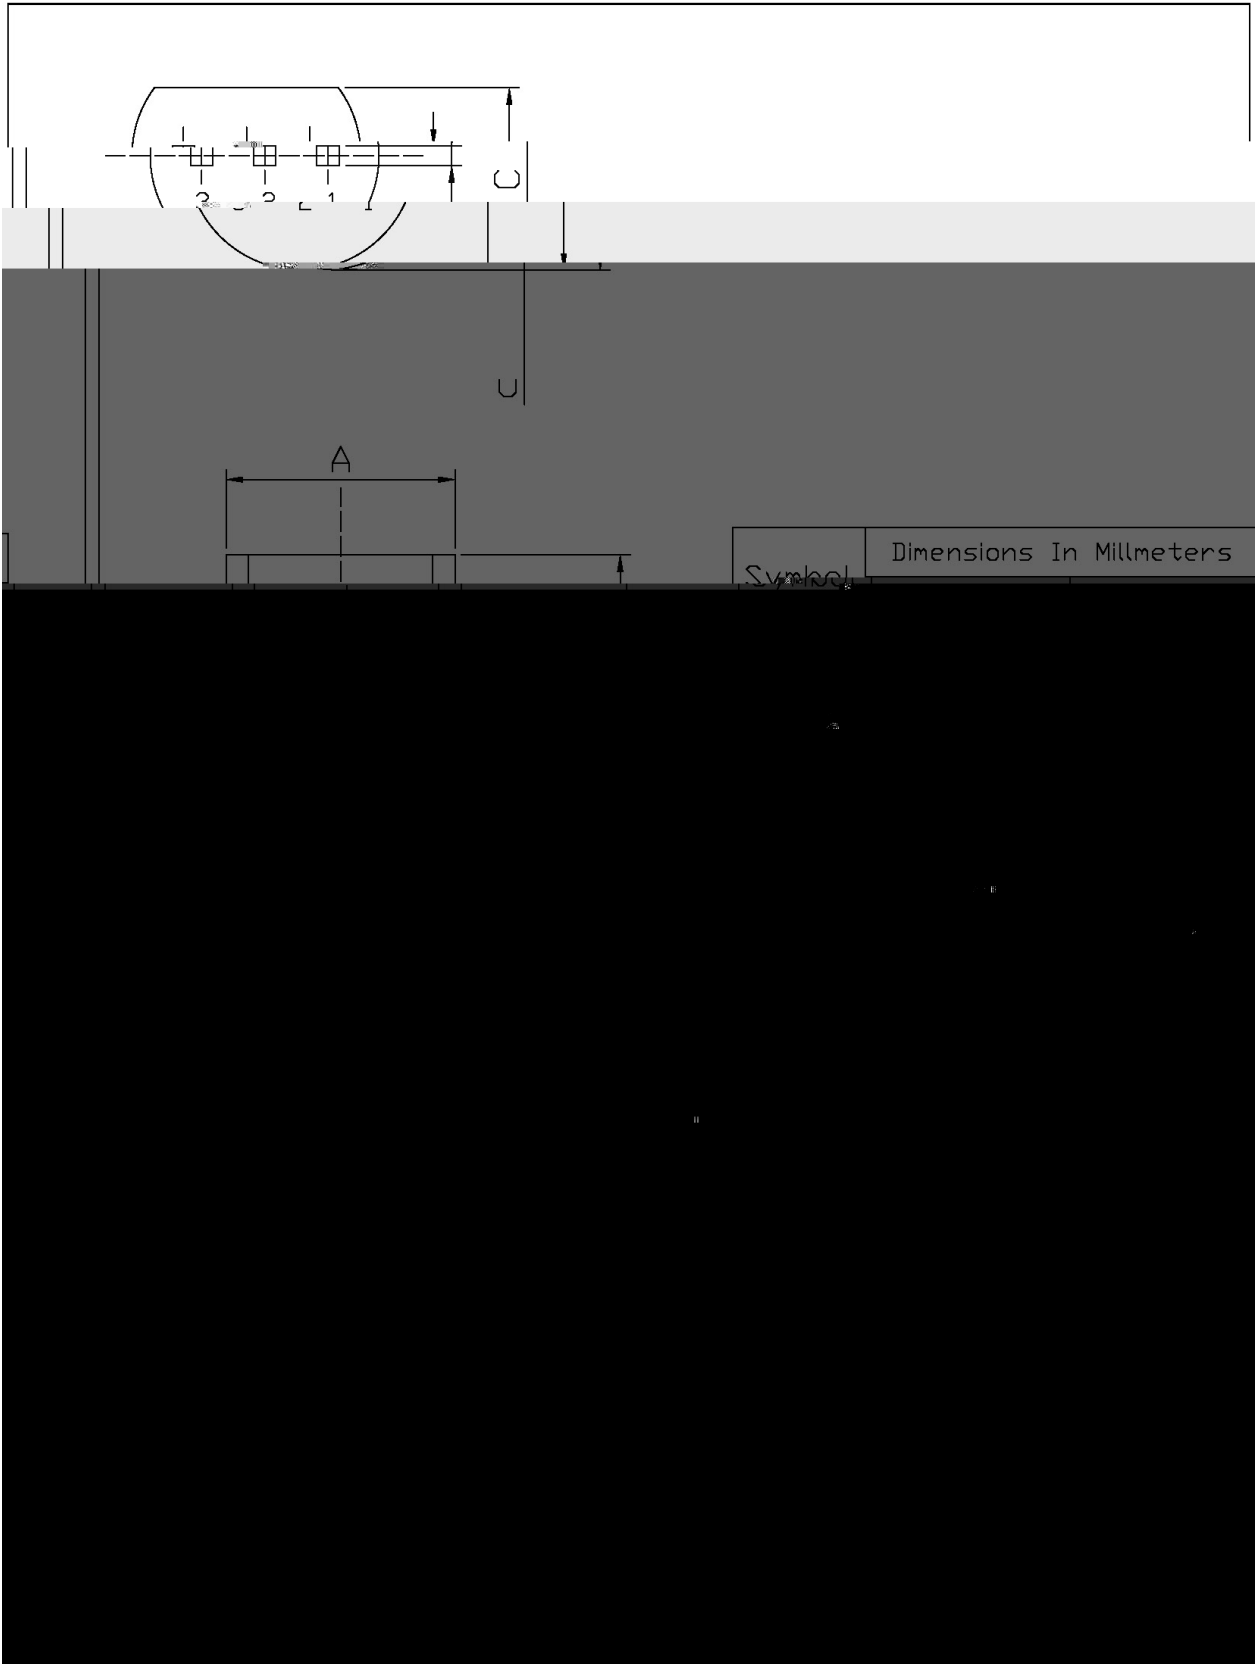


/ Marking Instructions

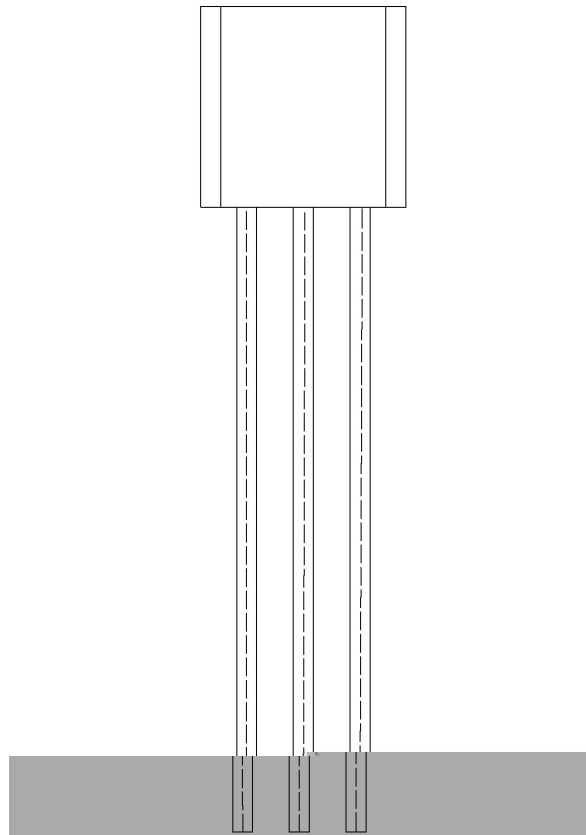

BR:
C458
B:

() / Temperature Profile for Dip Soldering(Pb-Free)

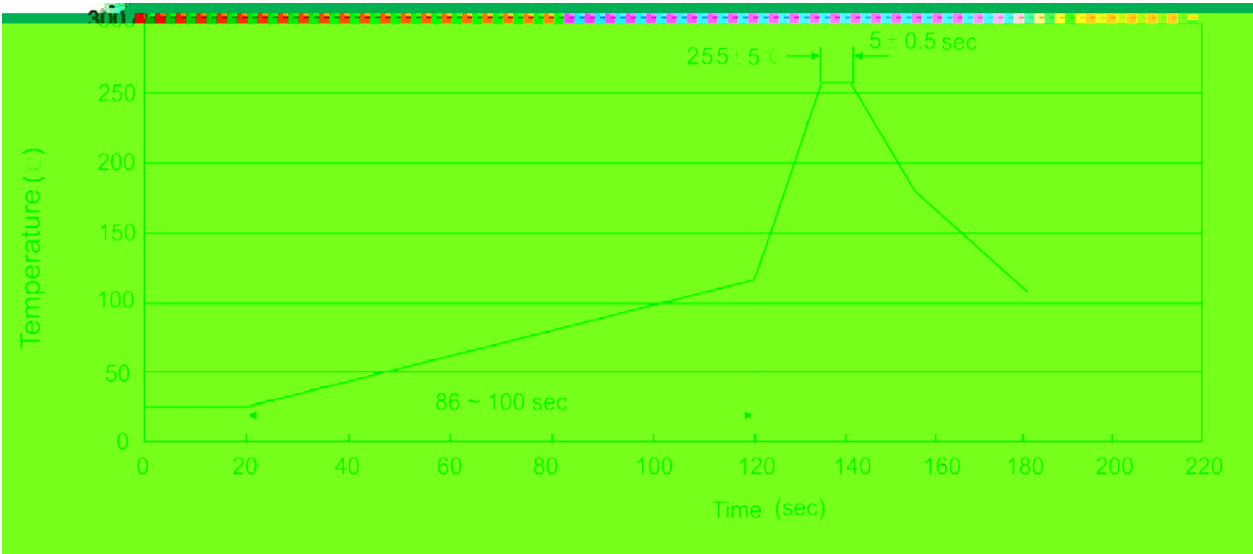

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸	
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒	箱
							小箱 , 大箱

/ Notices