


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

						μ
						μ
						μ
		Ω				μ
						μ


/ Electrical Characteristic Curve

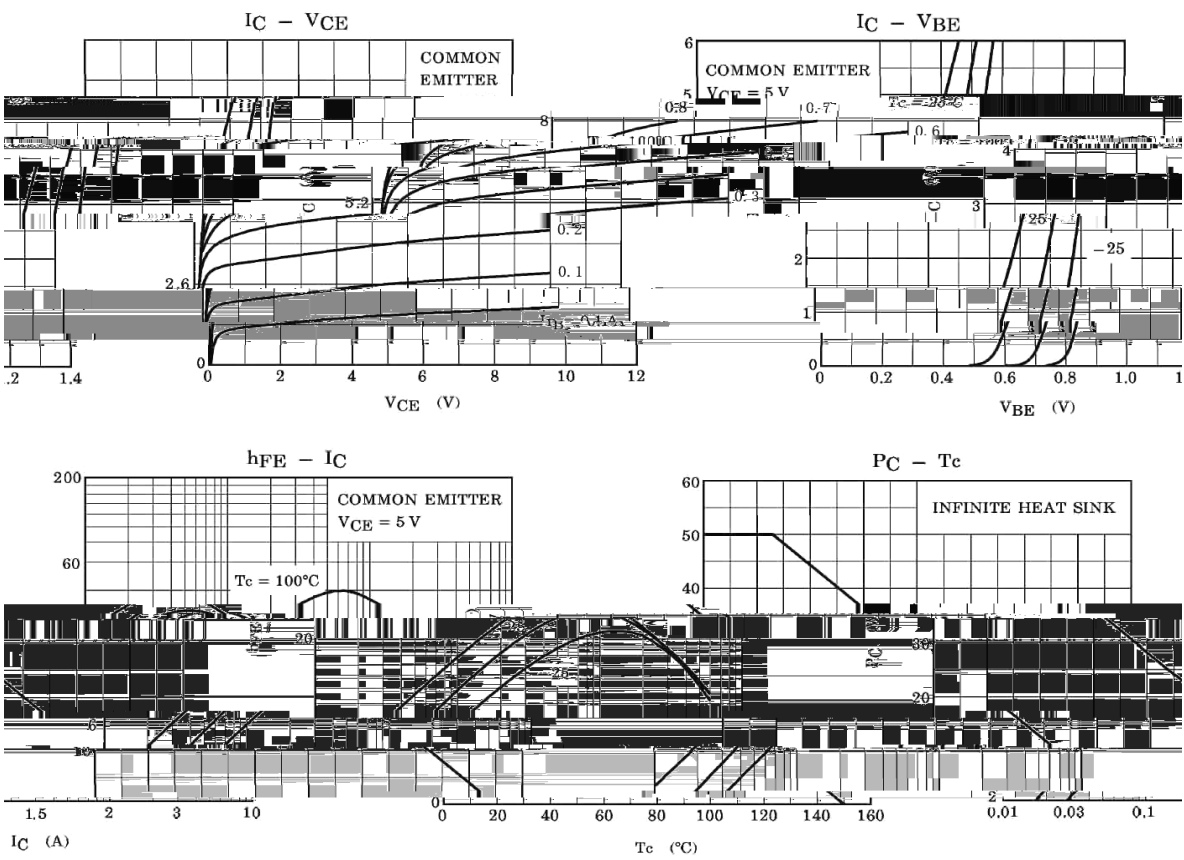


/ Package Dimensions

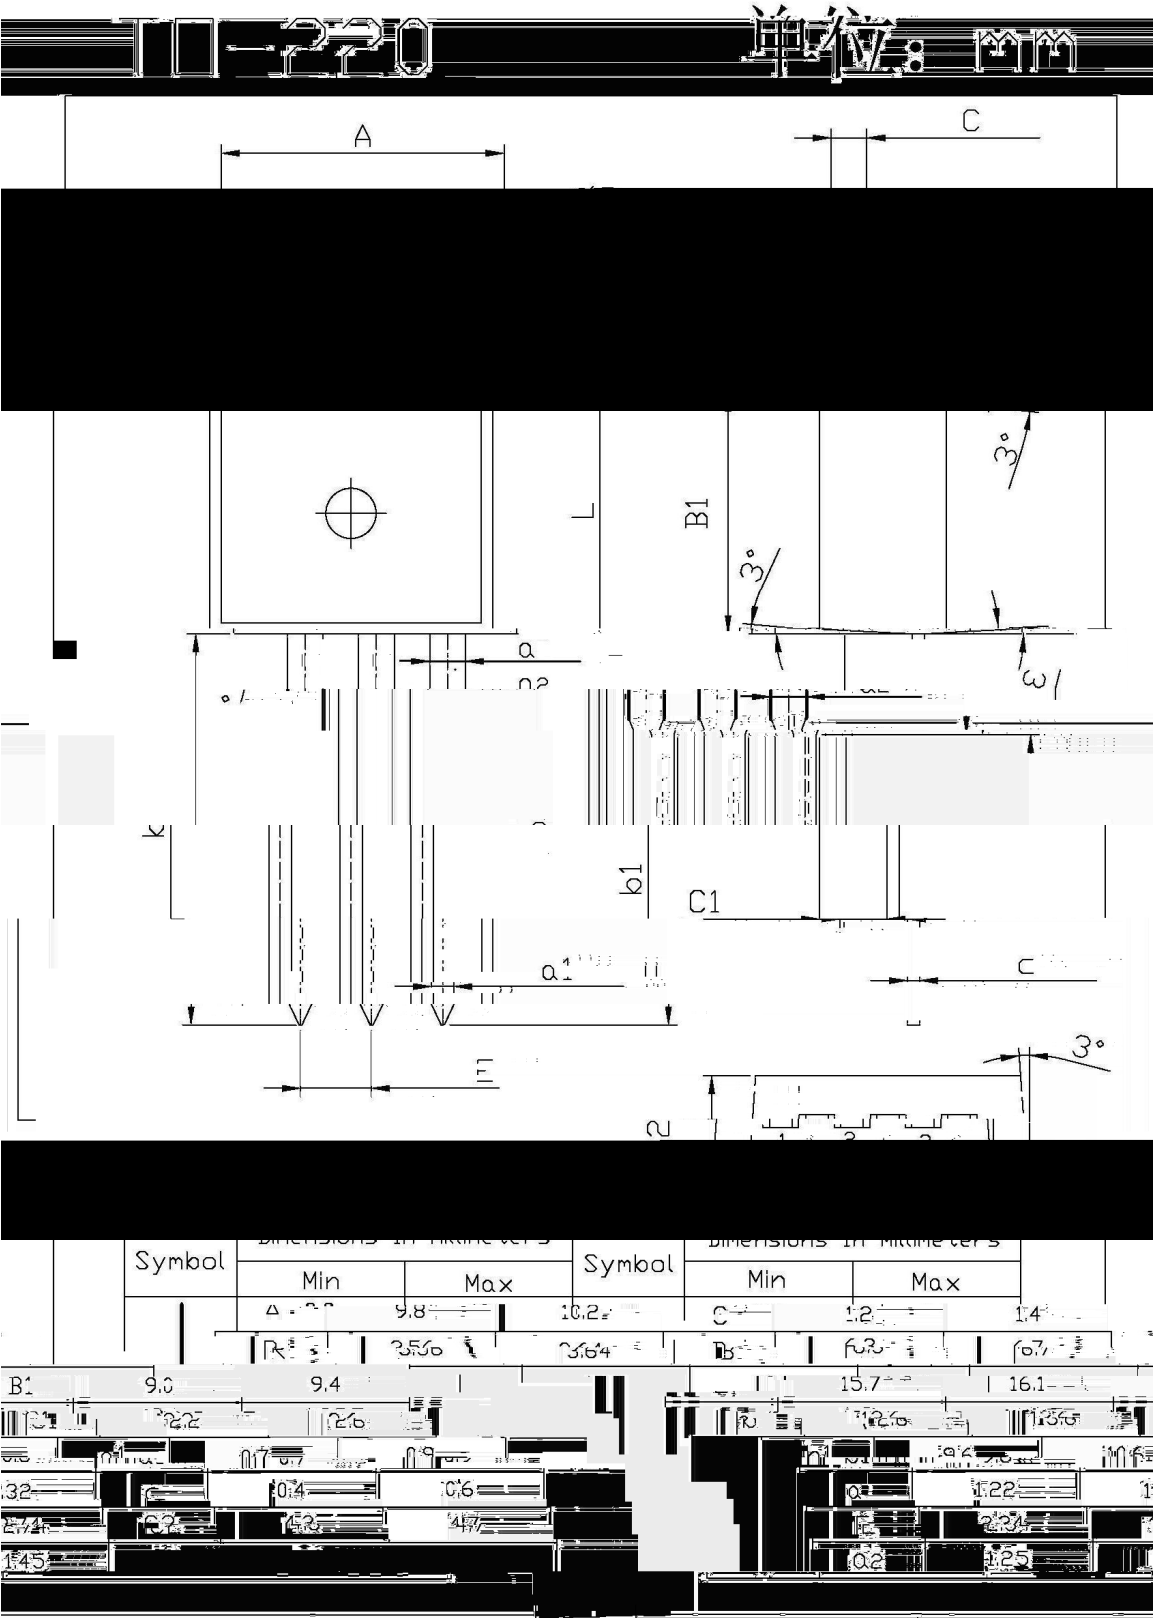

/ Marking Instructions

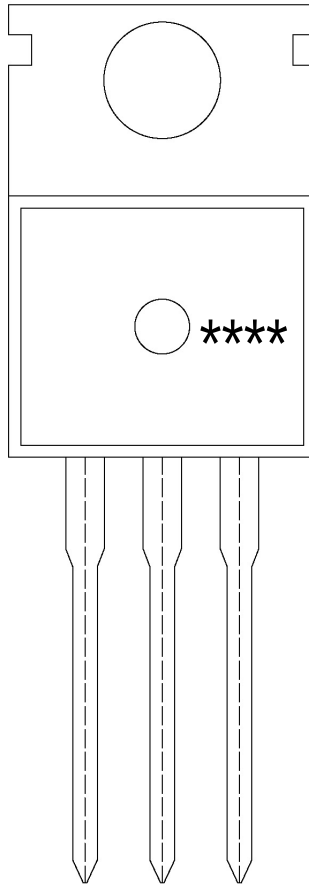

() / Temperature Profile for Dip Soldering(Pb-Free)

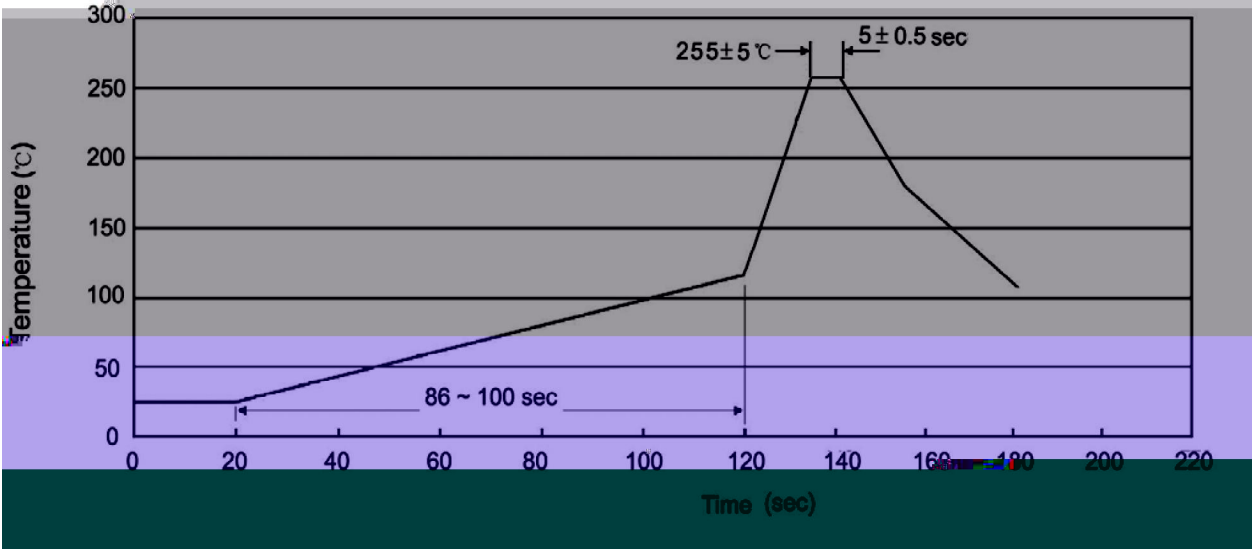

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

		包装数量		包装尺寸	
封装形式	Units/Bag 只/袋	Bags/Inner Box 袋/盒	Units/Inner Box 只/盒	Innn904 tk44 tte50Ou4 tte4n	