

/ Descriptions


TO-252 NPN

/ Features


f_T

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking


[illegible]

		μ				
		∞				
		μ				
						μ
						μ


/ Electrical Characteristic Curve

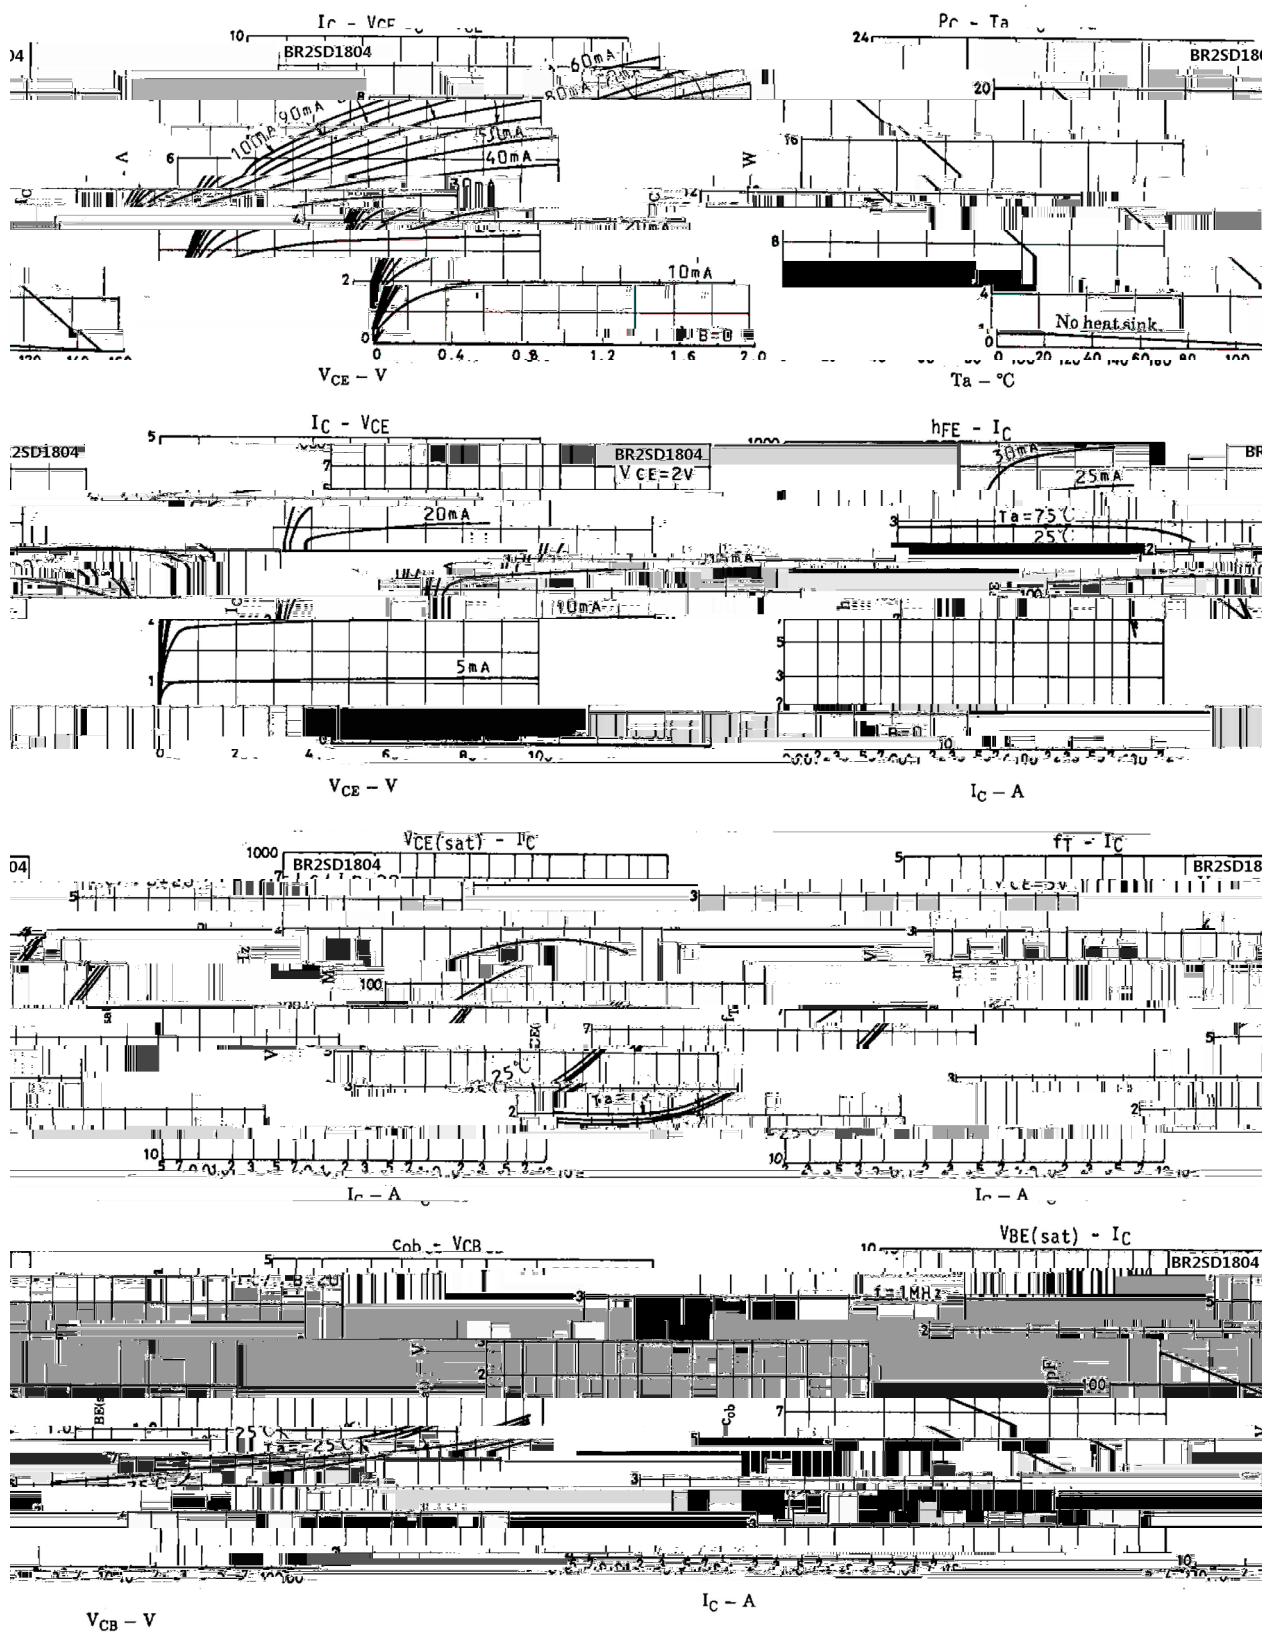

/ Package Dimensions

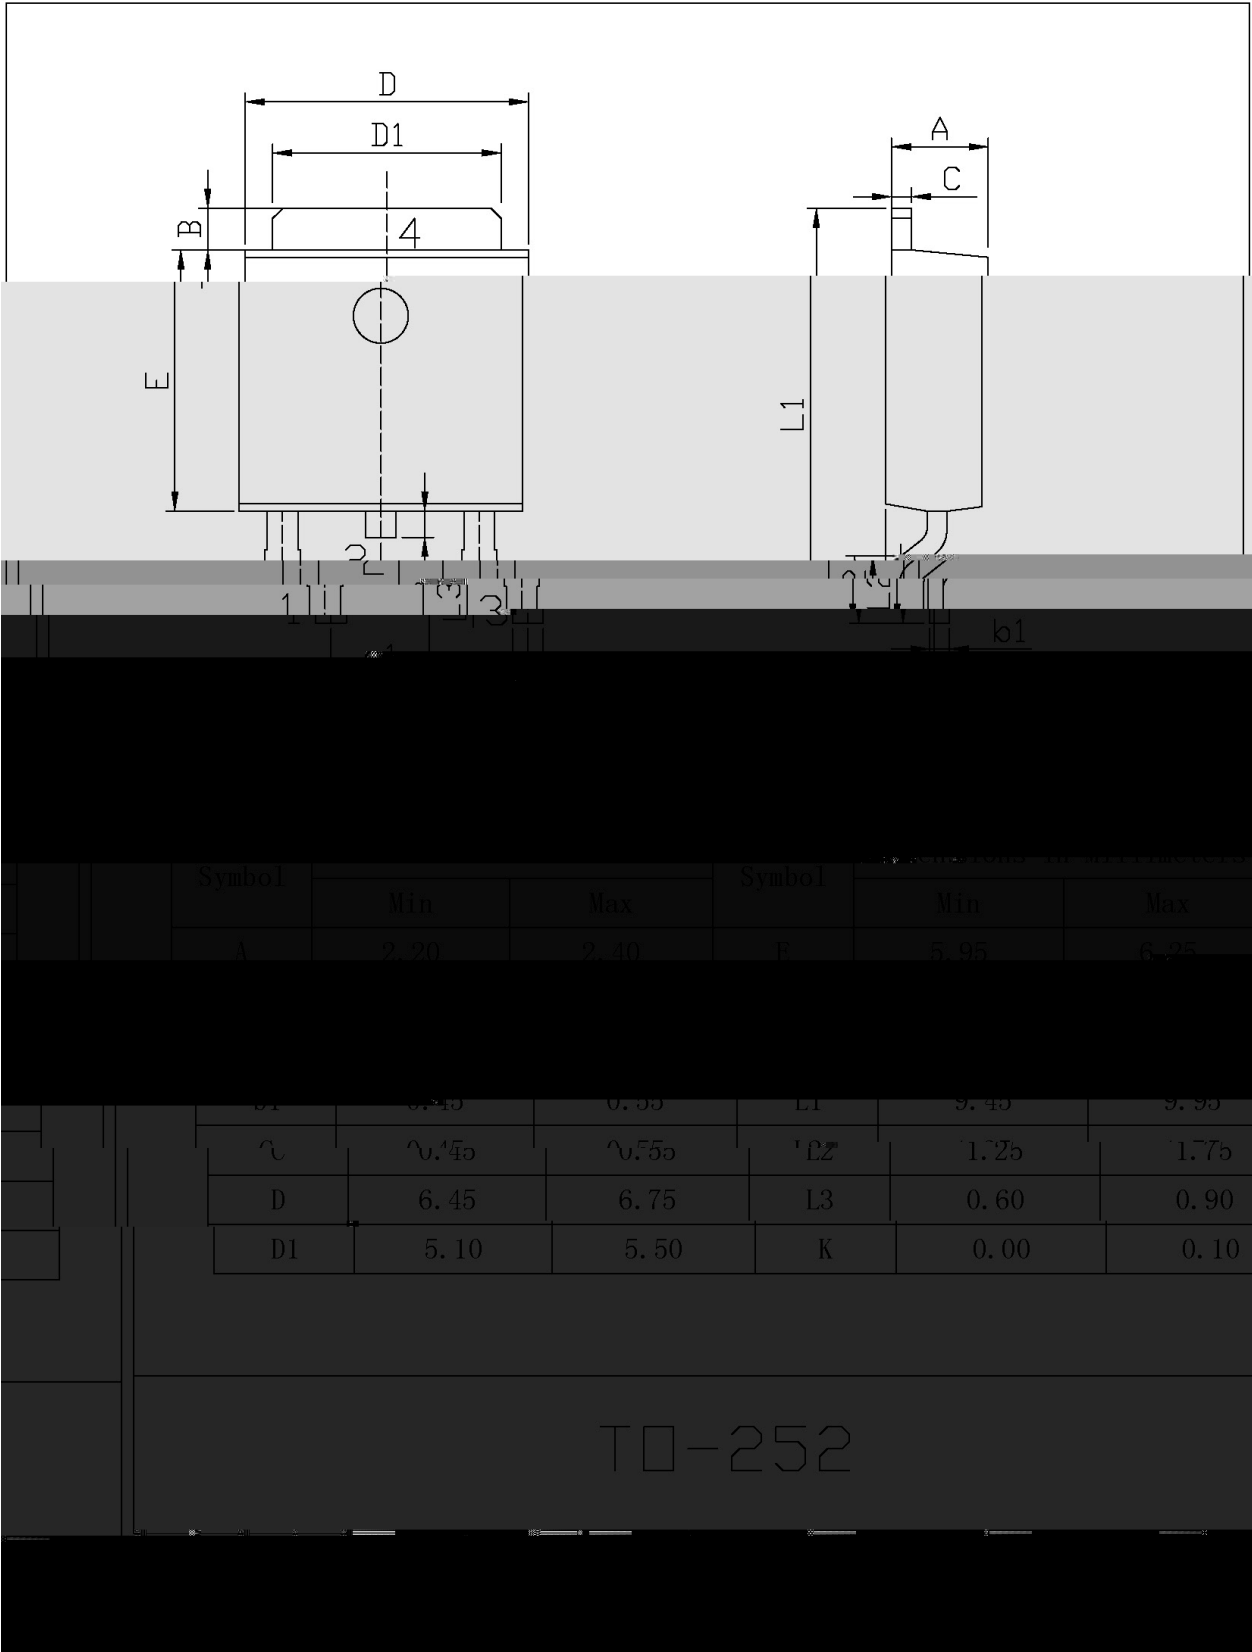


/ Marking Instructions

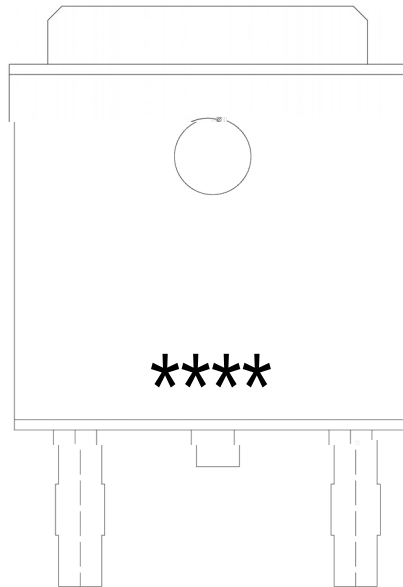

D1804

Q:

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

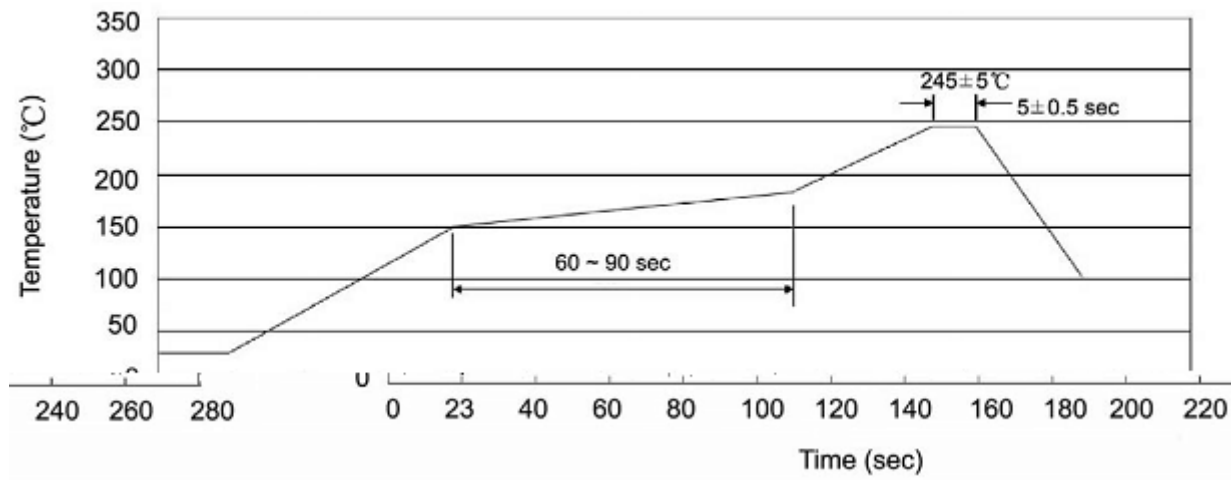

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	5	25,000	13 ×16	360×360×50	385×257×392

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180

/ Notices