


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)


/ Electrical Characteristics(Ta=25)

						μ
						μ

/ Electrical Characteristic Curve

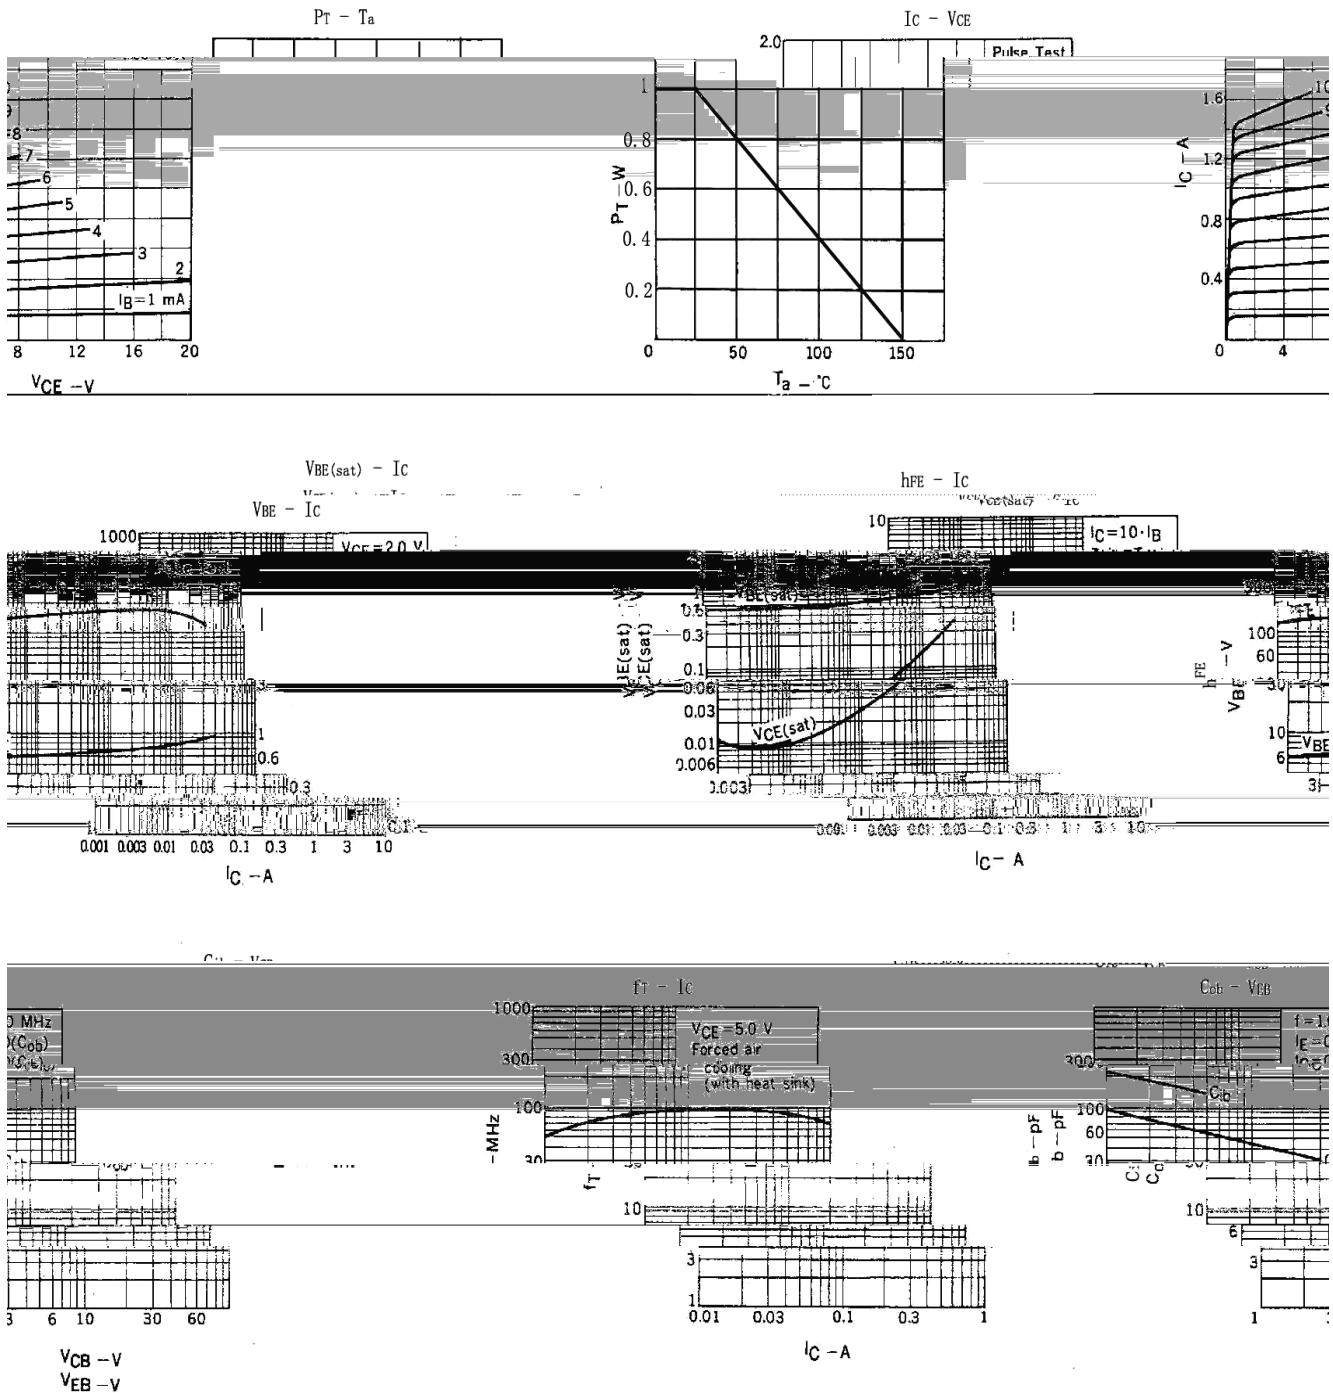

/ Package Dimensions

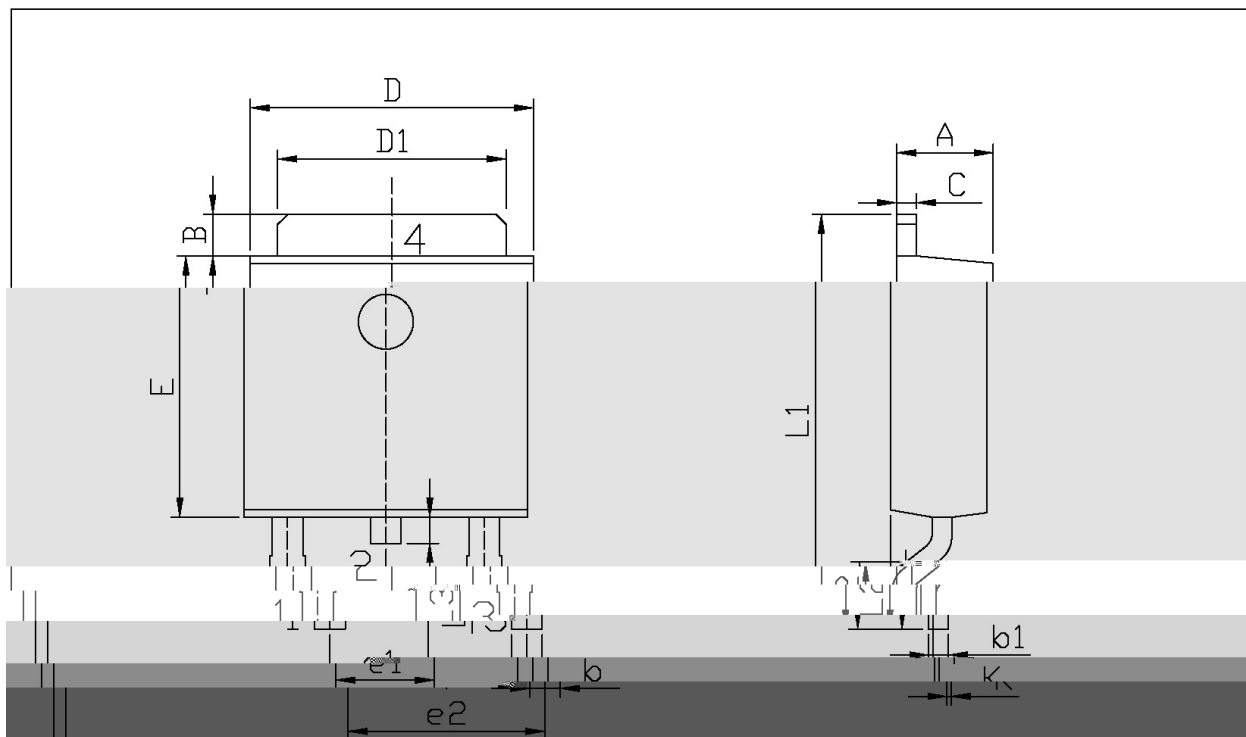


单位: mm


				Dimensions In Millimeters			Dimensions In Millimeters	
			Symbol	Min	Max	Symbol	Min	Max
			A	2.20	2.40	E	5.95	6.25
			B	0.95	1.25	e1	2.24	2.34
			b	0.50	0.70	e2	4.43	4.73
			b1	0.45	0.55	L1	9.45	9.75
			c	0.45	0.55	L2	1.25	1.75
			D	6.45	6.75	L3	0.60	0.90
			D1	5.10	5.50	K	0.00	0.10

T0-252

/ Marking Instructions

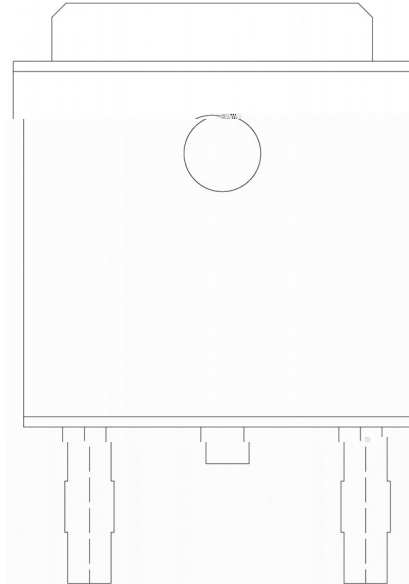

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

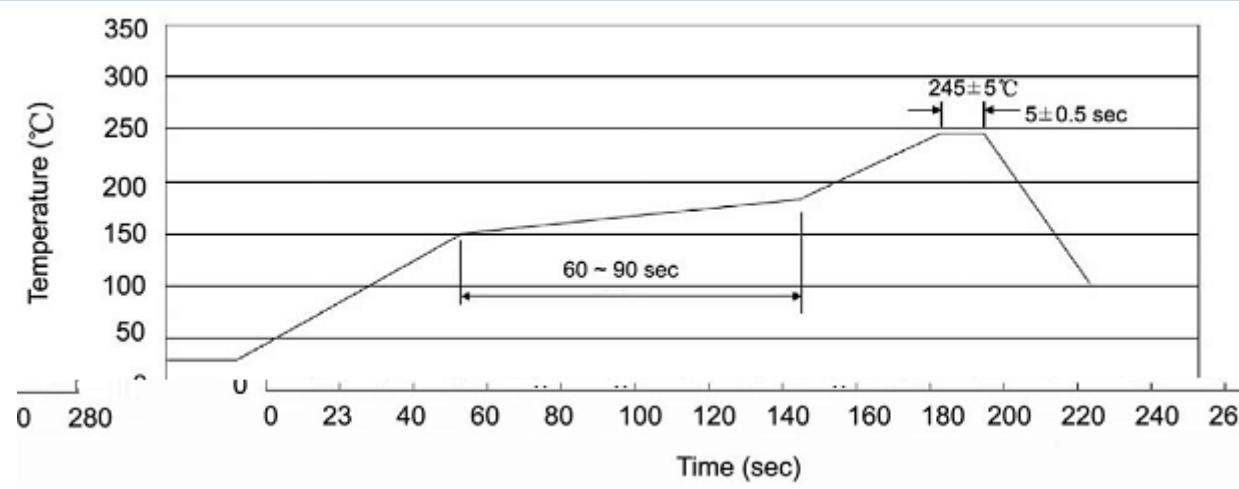

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

/ Notices