

/ Descriptions

SOT-223 NPN Silicon NPN transistor in a SOT-223 Plastic Package.


/ Features

$V_{CE(sat)}$, h_{FE}
Low saturation voltage, excellent h_{FE} linearity and high h_{FE} .


/ Applications

3
Output stage of 3 watts audio amplifier, voltage regulator, DC-DC converter and relay driver .

/ Equivalent Circuit



/ Pinning



PIN1 Base PIN 2 Collector PIN 3 Emitter

/ h_{FE} Classifications & Marking

h_{FE} Classifications Symbol	R	Q	P	E
h_{FE} Range	60~120	100~200	160~320	200~400


/ Absolute Maximum Ratings(Ta=25)

Parameter	Symbol	Rating	Unit
Collector to Base Voltage	V_{CBO}	40	V
Collector to Emitter Voltage	V_{CEO}	30	V
Emitter to Base Voltage	V_{EBO}	5.0	V
Collector Current - Continuous	I_C	3.0	A
Collector Power Dissipation	P_C	1.0	W
	$P_C(T_C=25^{\circ}C)$	10	W
Junction Temperature	T_j	150	$^{\circ}C$
Storage Temperature Range	T_{stg}	-55 150	$^{\circ}C$

/ Electrical Characteristics(Ta=25)


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Collector Cut-Off Current	I_{CBO}	$V_{CB}=30V$ $I_E=0$			1.0	μA
Emitter Base Cut-Off Current	I_{EBO}	$V_{EB}=3.0V$ $I_C=0$			1.0	μA
DC Current Gain	$h_{FE(1)}$	$V_{CE}=2.0V$ $I_C=1.0A$	60	160	400	
	$h_{FE(2)}$	$V_{CE}=2.0V$ $I_C=20mA$	30	150		
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=2.0A$ $I_B=0.2A$		0.3	0.5	V
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=2.0A$ $I_B=0.2A$		1.0	2.0	V
Transition Frequency	f_T	$V_{CE}=5.0V$ $I_C=0.1A$		90		MHz
Collector output capacitance	C_{ob}	$V_{CB}=10V$ $f=1.0MHz$ $I_E=0$		45		pF

/ Electrical Characteristic Curve

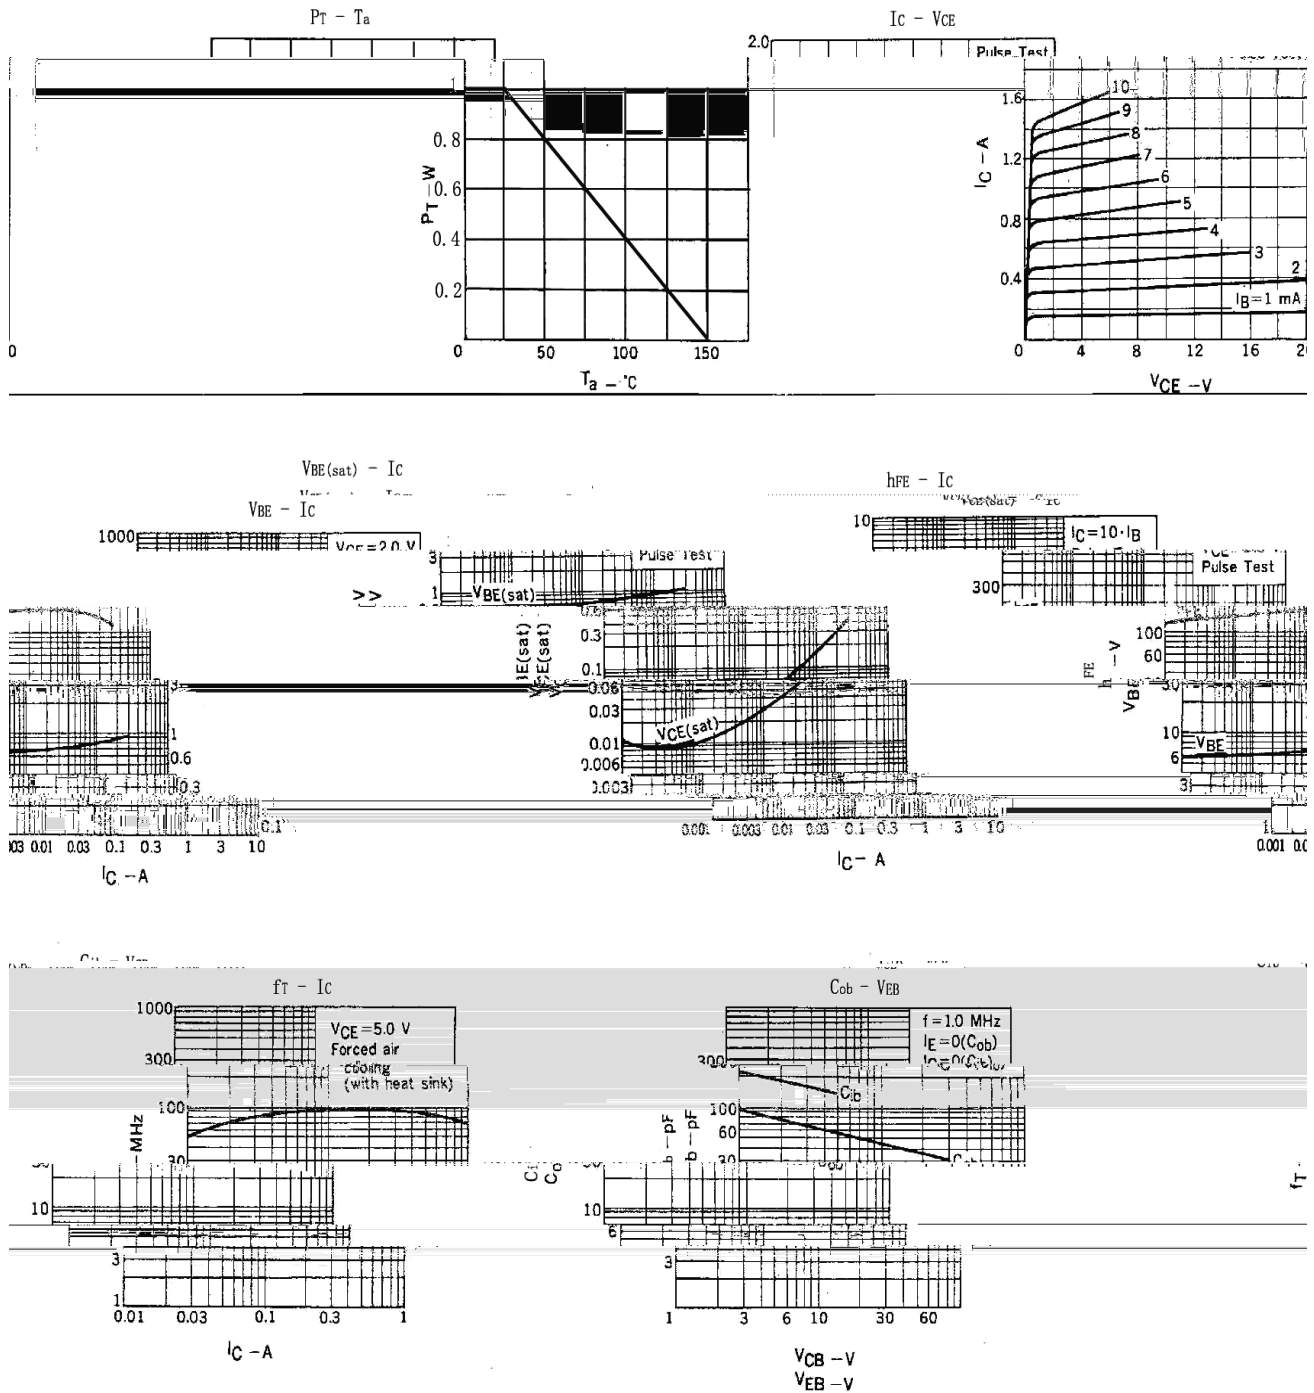


SOT-223

单位: ㎎ ㎎

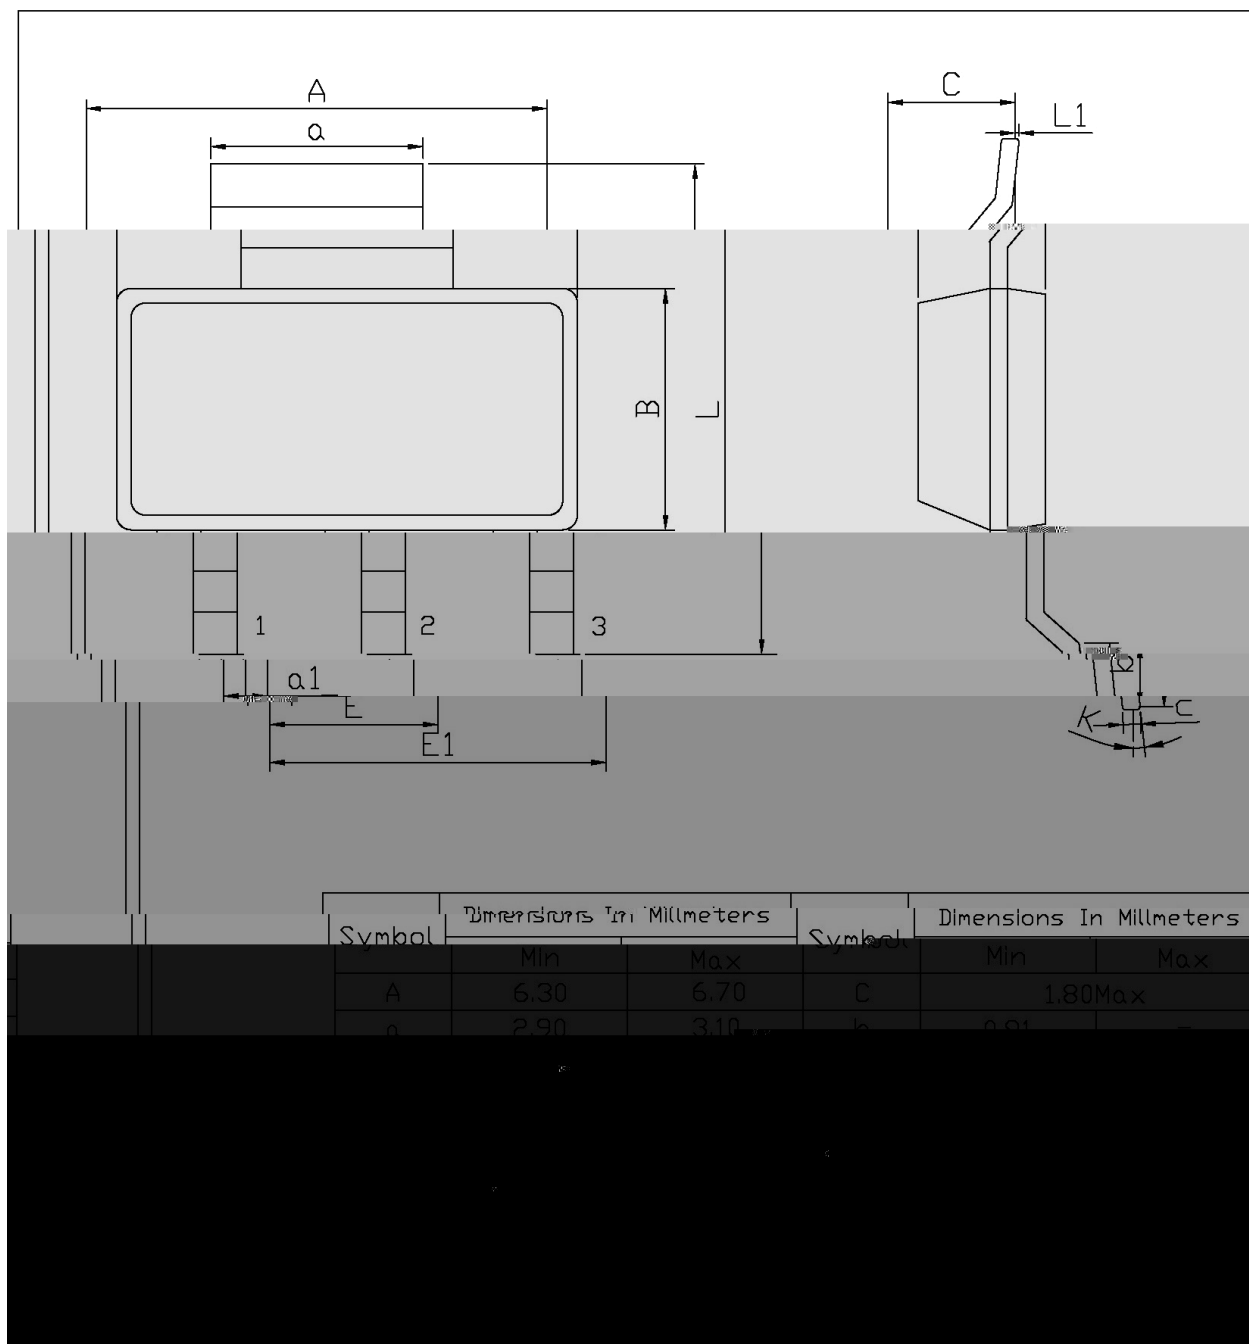

/ Marking Instructions

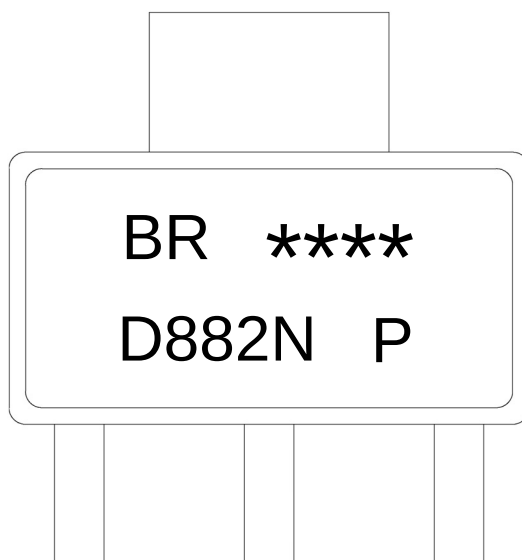

BR

D882N

P

h_{FE}

Note:


BR: Company Code.

D882N: Product Type.

P: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

() /

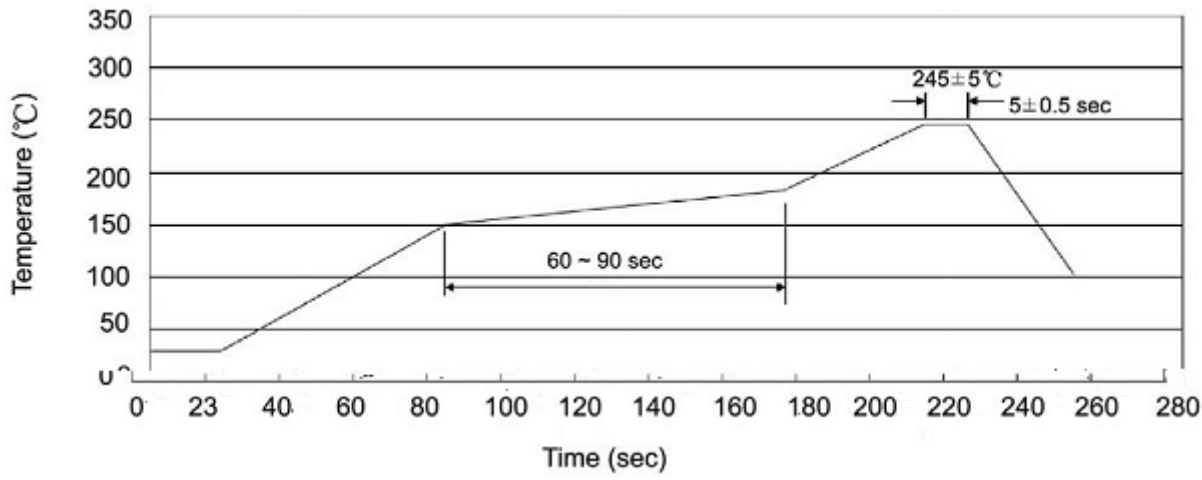

Note:

- 1

25 150

60 90sec;

1.Preheating:25~150 , Time:60~90sec.
- 2

245±5

5±0.5sec;

2.Peak Temp.:245±5 , Duration:5±0.5sec.
- 3

2 10 /sec.

3. Cooling Speed: 2~10 /sec.

/ Resistance to Soldering Heat Test Conditions

260±5 10±1 sec. Temp:260±5℃ Time:10±1 sec

/ Packaging SPEC.

/ REEL

Package Type 封装形式	Units 包装数量					Dimension 包装尺寸 (unit: mm ³)		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices