

2SD999


SOT-89

NPN

h_{FE}

2SB798

/ Equivalent Circuit



/ Marking




/ Absolute Maximum Ratings(Ta=25 –)

		~	

* 16cmm²×0.7mm

/ Electrical Characteristics(Ta=25 –)


/ Electrical Characteristic Curve

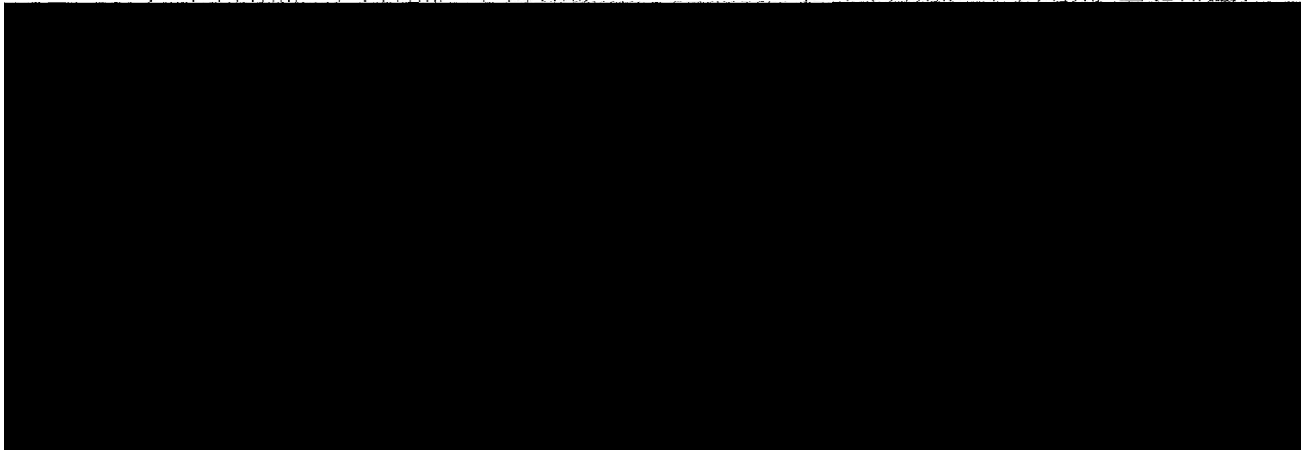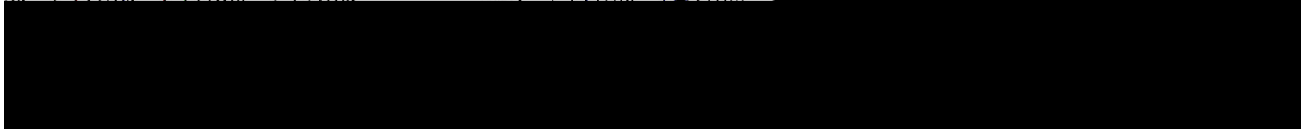

/ Package Dimensions


SOT-89

单位: mm

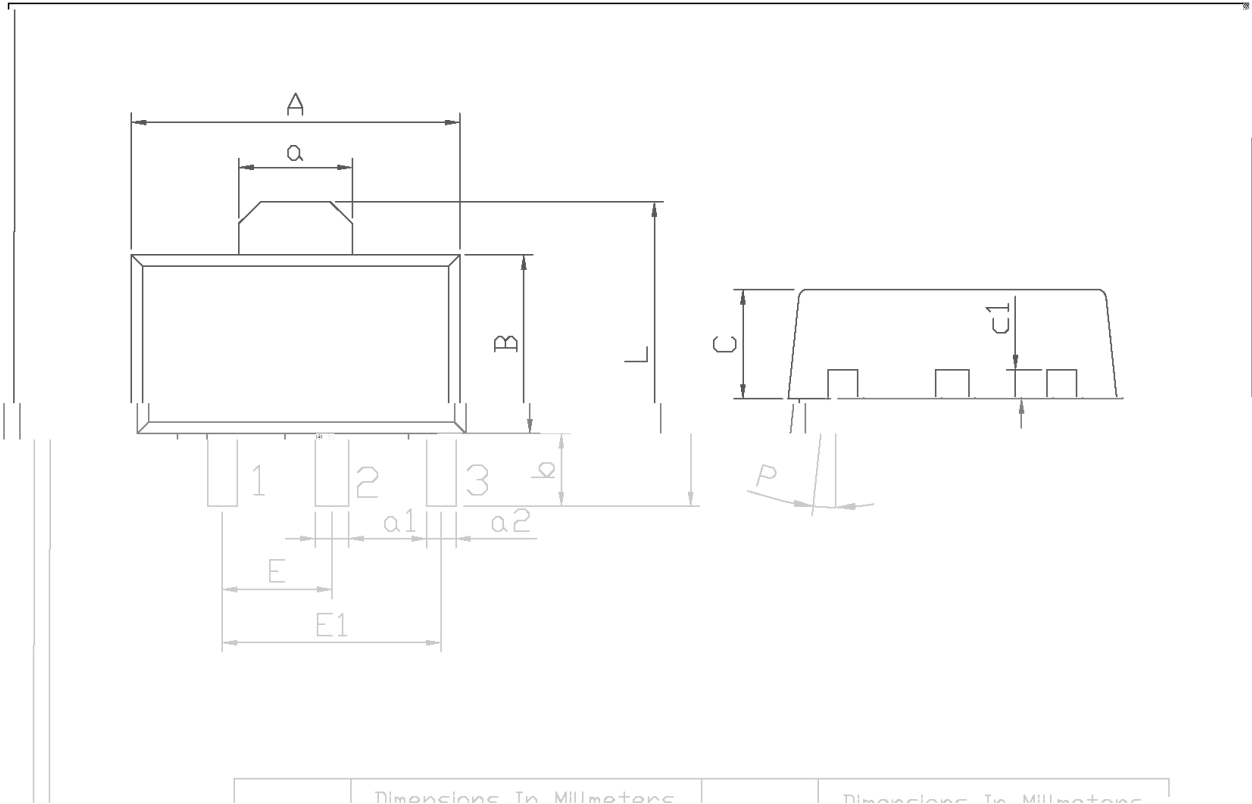


L	3.8/8	4.4/8	C	1.40	1.70
a	1.45	1.65	c1	0.35	0.50
E	1.40	1.60	P	6°	
E1	2.80	3.20			
b	0.80	1.20			

/ Marking Instructions

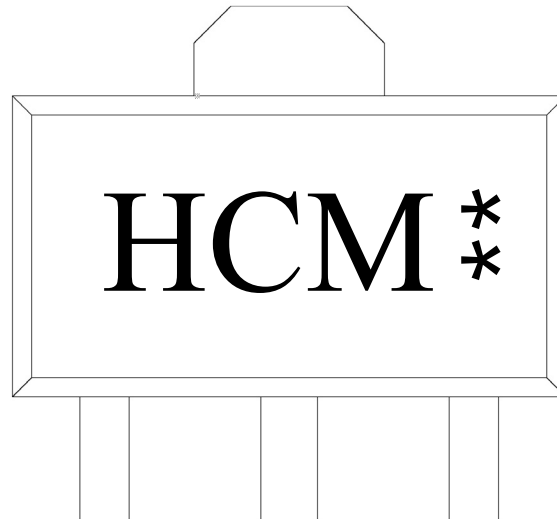

**

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

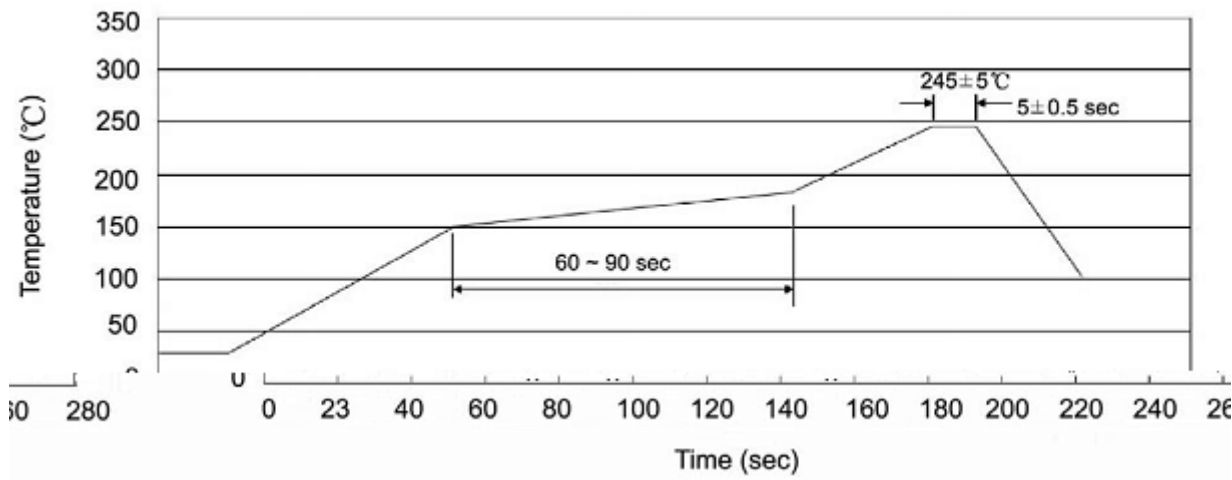

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-89	1,000	7	7,000	8	56,000	7" ×12	180×120×180	385×257×392

/ Notices