


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit or Application Circuit

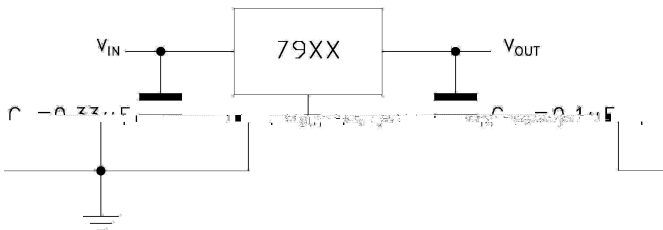

/ Pinning

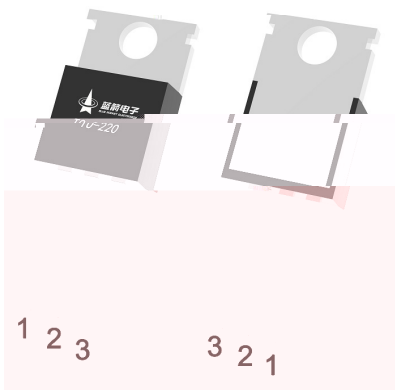

/ Marking


/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		

/ Electrical Characteristics(Ta=25)

		≤				
						μ


/ Electrical Characteristic Curve

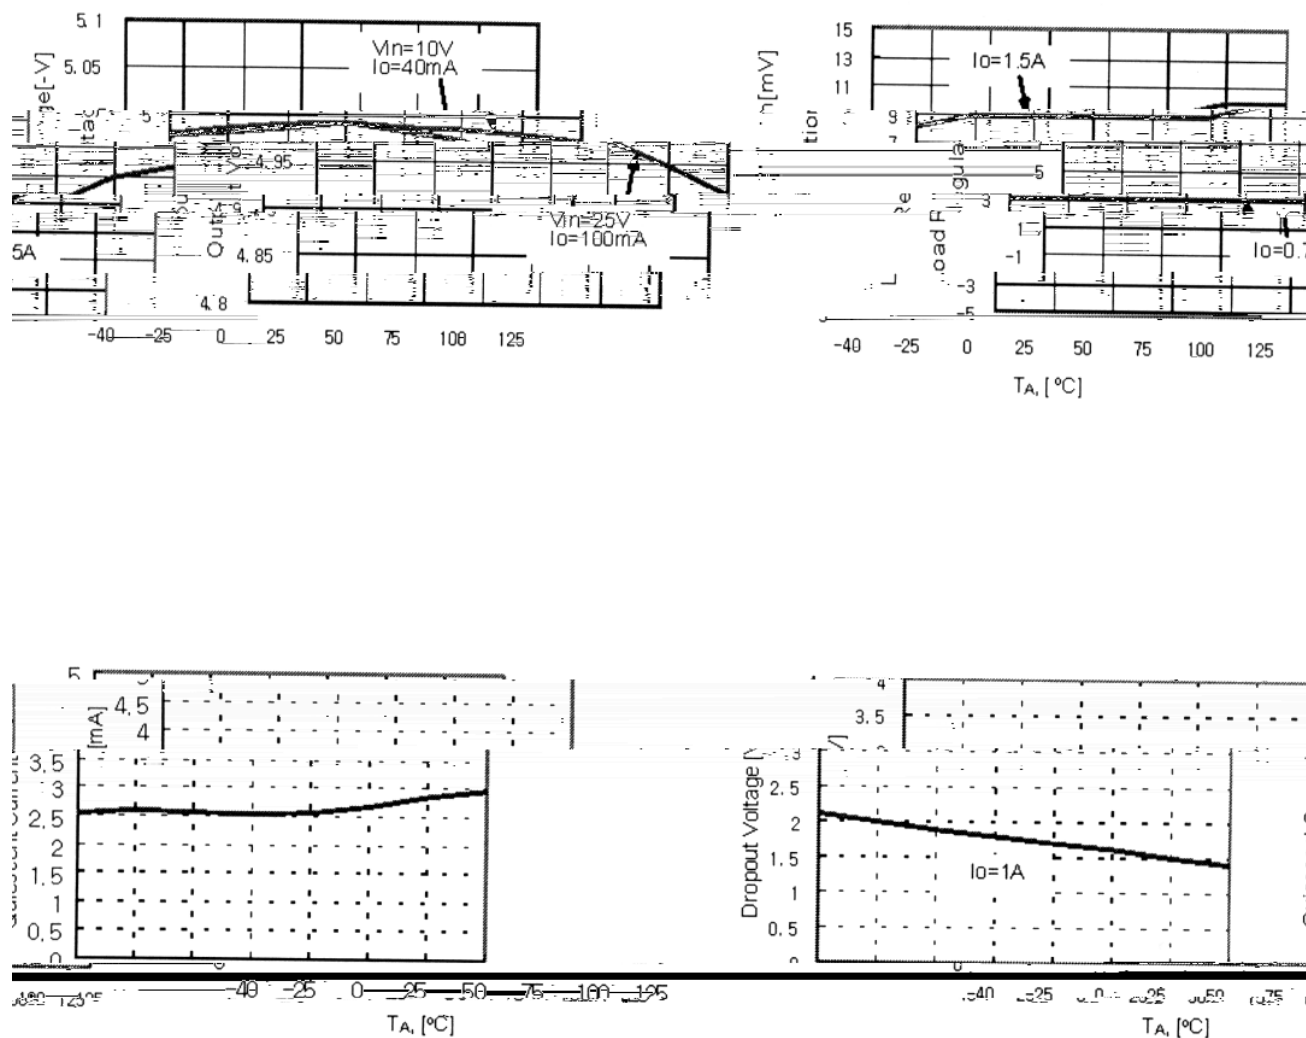

/ Package Dimensions


TO-220

单位: mm

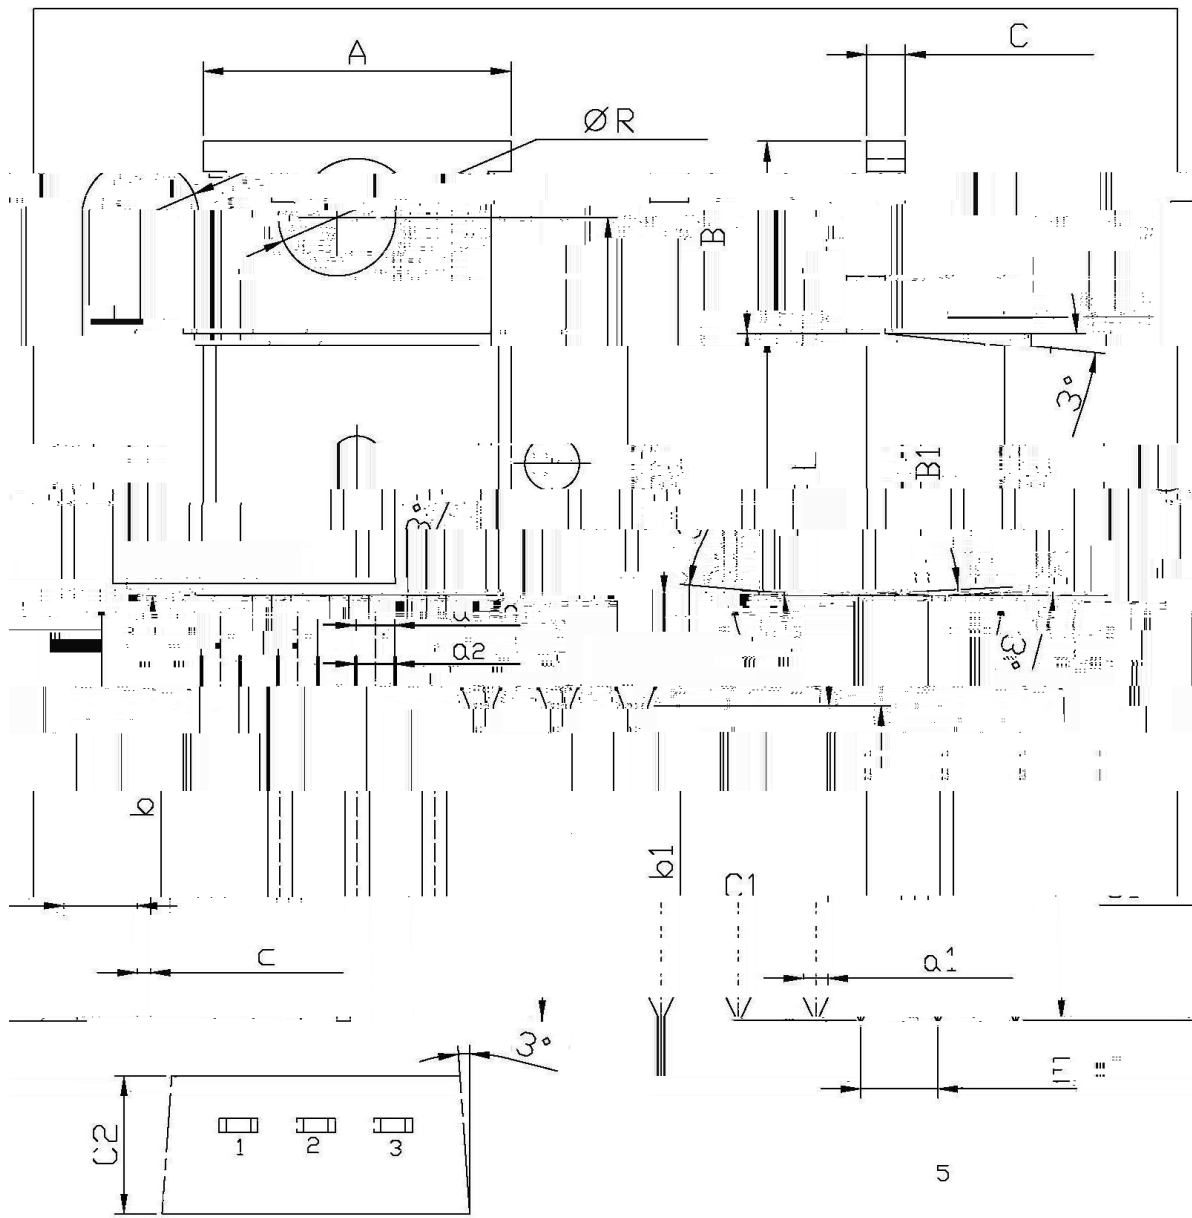

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	9.8	10.2	C	1.2	1.4
R	3.56	3.64	B	6.3	6.7
L	15.7	16.1	B1	9.0	9.4
b	12.6	13.6	C1	2.2	2.6


/ Marking Instructions

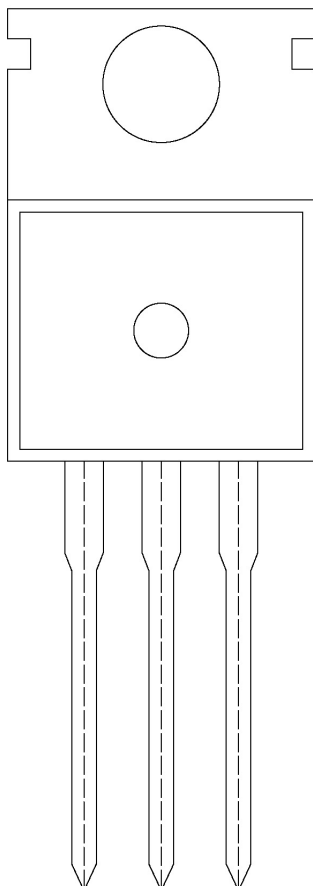

BR

CW7905

() / Temperature Profile for Dip Soldering(Pb-Free)

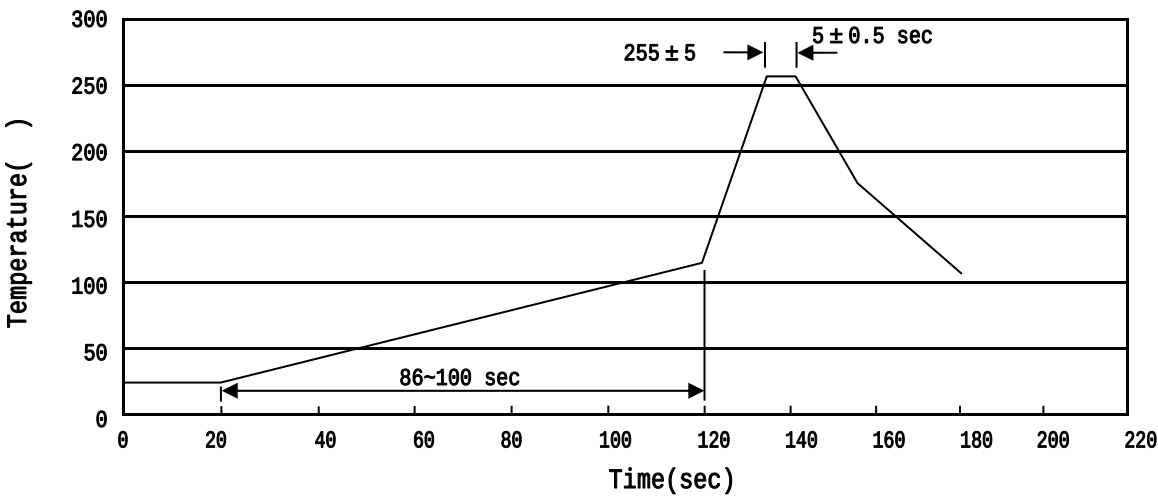

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box

/ Notices