


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking


	* *	* *	* *	* *

/ Absolute Maximum Ratings(Ta=25 –)

/ Electrical Characteristics(Ta=25 –)

						μ
						μ
		Ω	Ω			


/ Electrical Characteristic Curve

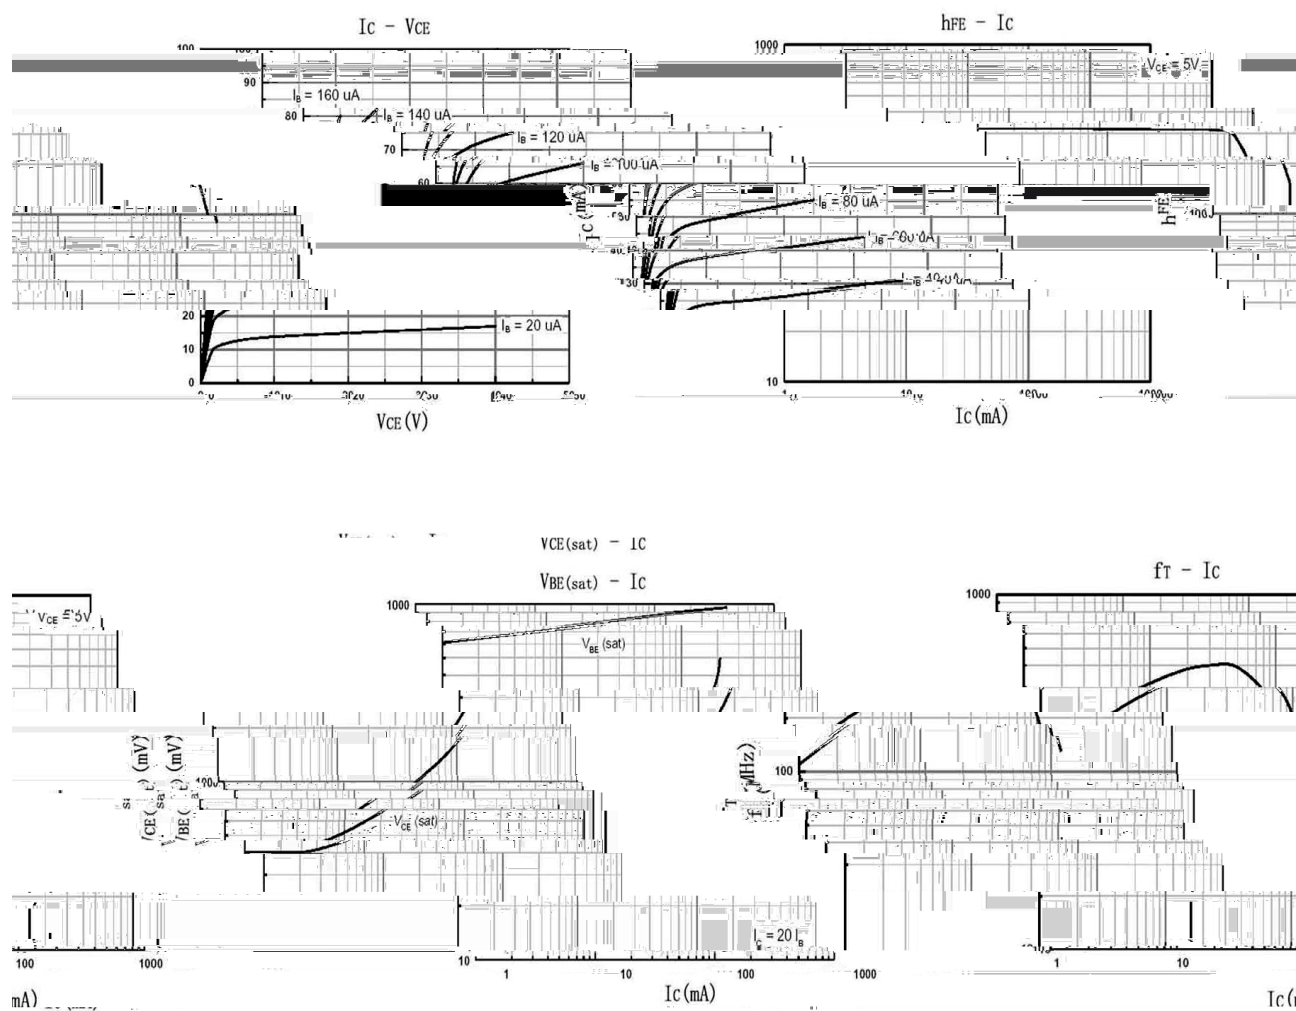


/ Package Dimensions

SOT-89


单位: mm

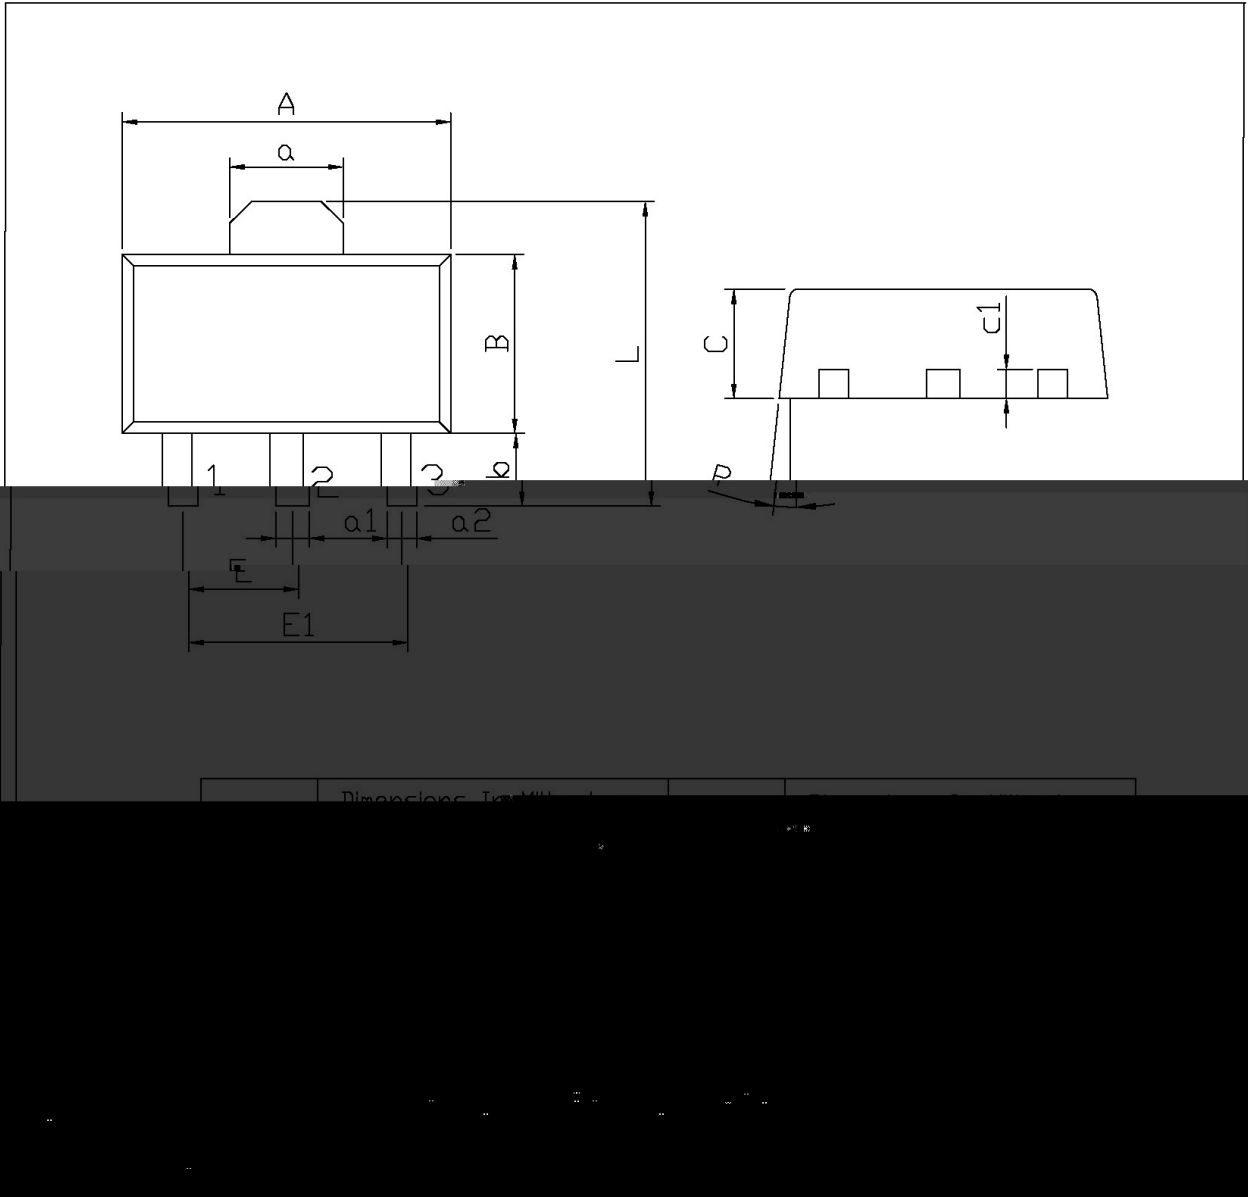

/ Marking Instructions

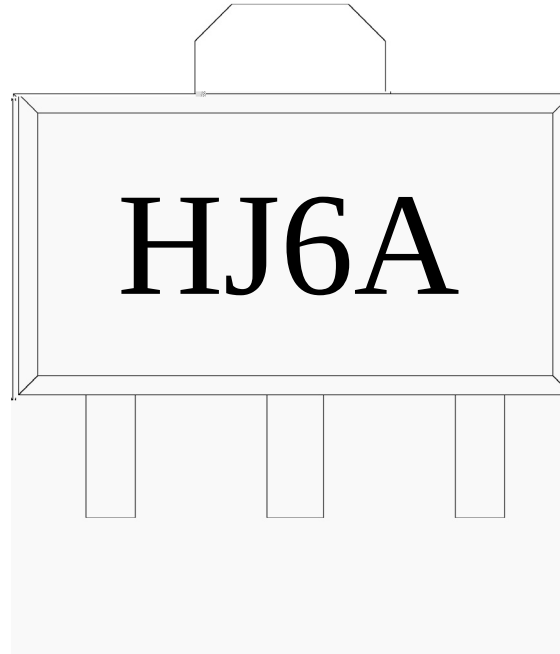

() / Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

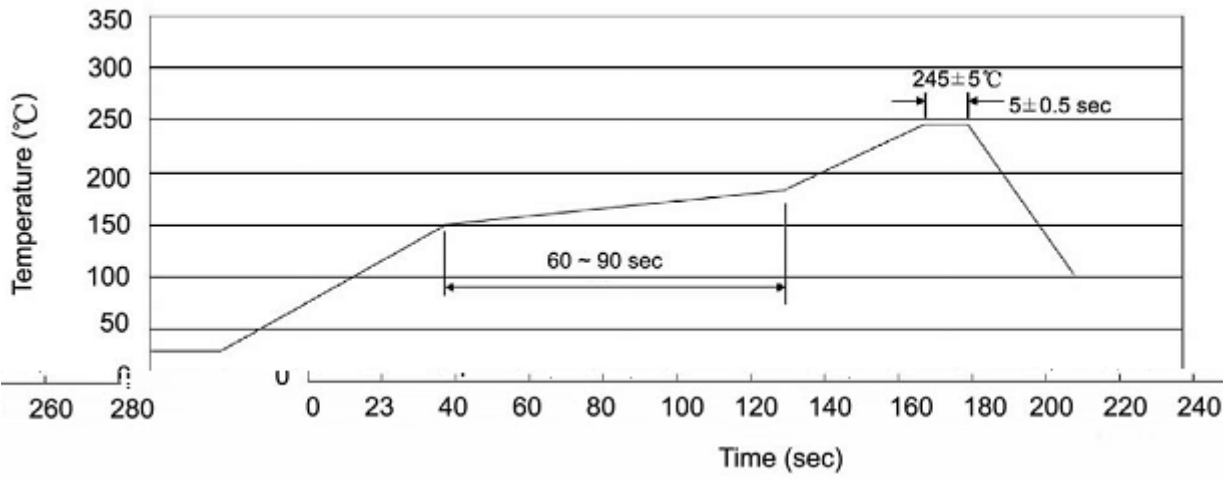

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸	
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱	盒	箱