


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ Marking

--	--

/ Absolute Maximum Ratings(Ta=25 –)


/ Electrical Characteristics(Ta=25 –)

I Electrical Characteristic Curve

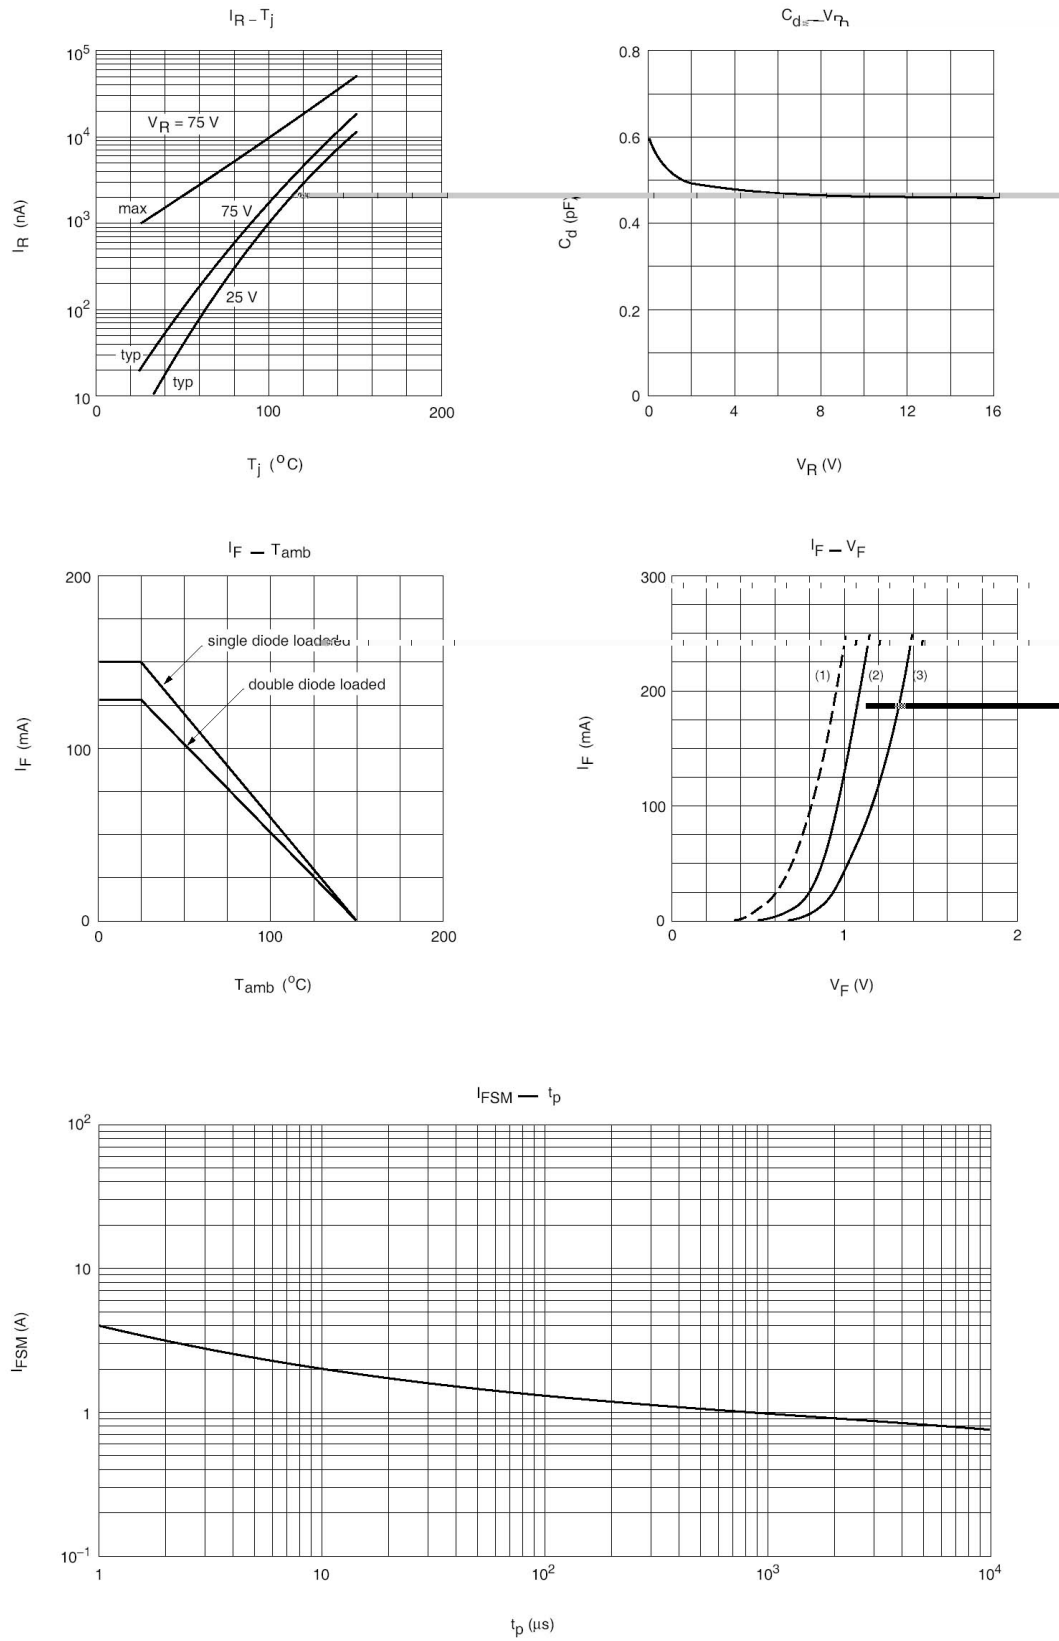


SOT-323

单位; ㎎ ㎎

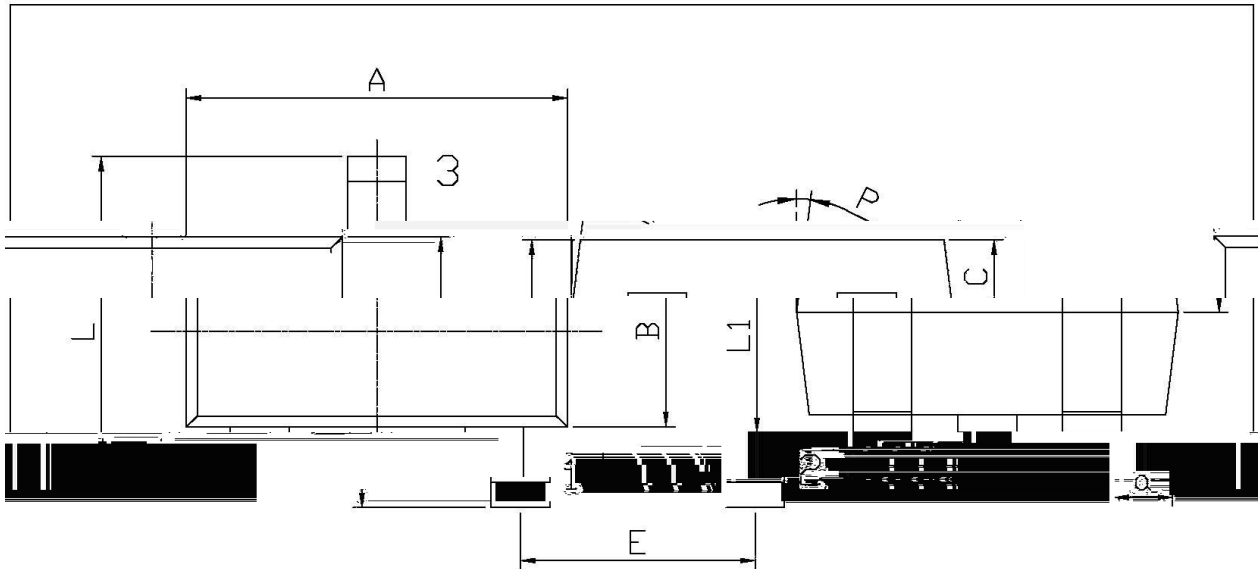


Max	Symbol	Max	Symbol
2.35	C	0.30	A
2.2	CI	0.85	1.15
1.40	C	0.20	0.40
1.5			

/ Marking Instructions

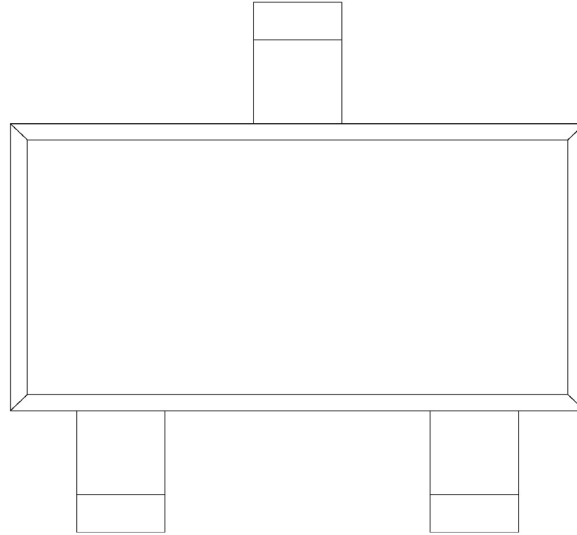

() / Wh p shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0l uhh,

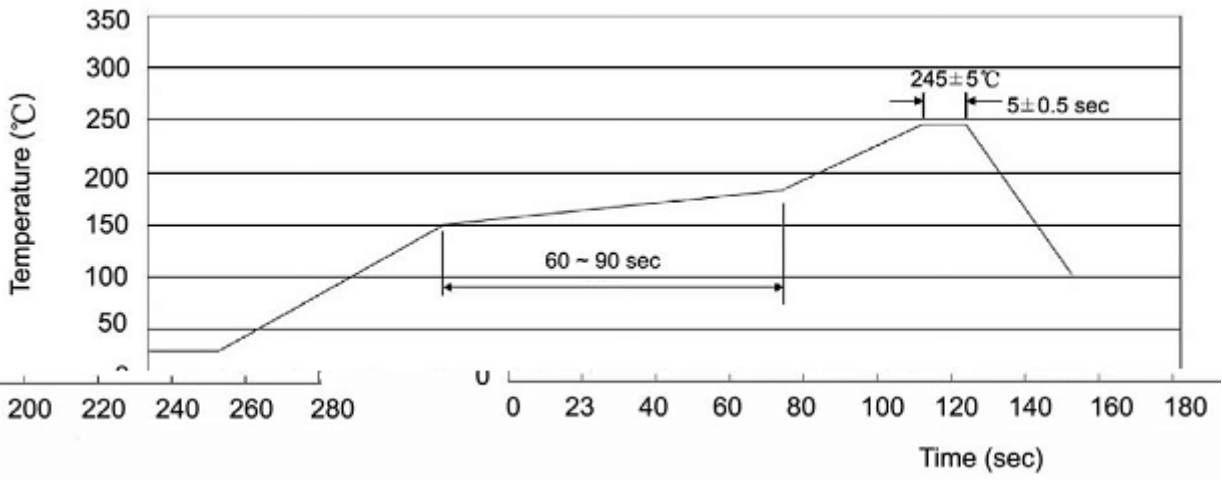

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices