


/ Descriptions

/ Features

/ Applications

/ Equivalent Circuit



/ Pinning



/ hFE Classifications & Marking

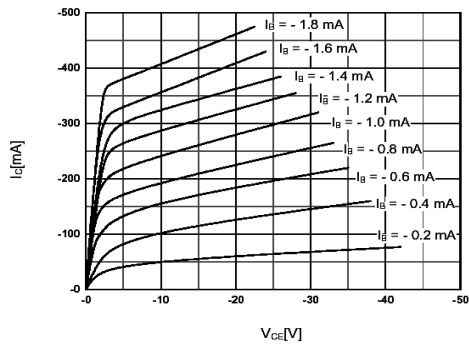
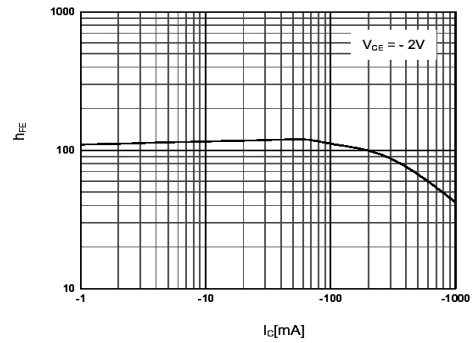
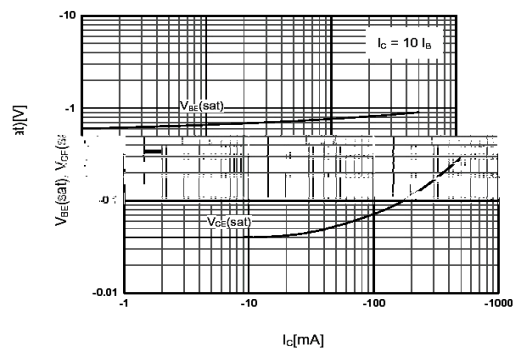
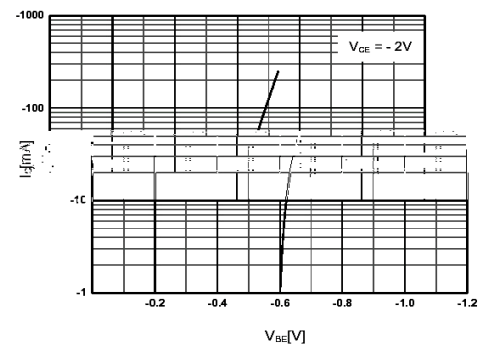
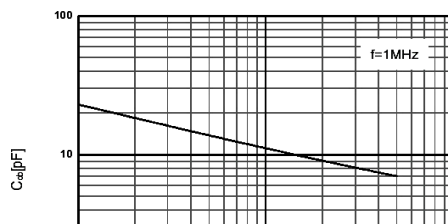
/ Absolute Maximum Ratings(Ta=25)

	CB0		
			℃
			℃

/ Electrical Characteristics(Ta=25)

						μ
						μ

/ Electrical Characteristic Curve

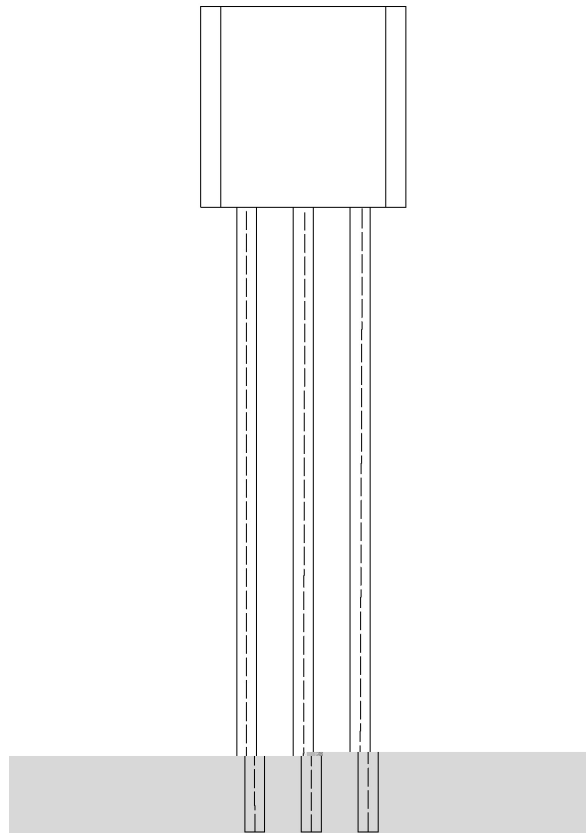
 $I_C - V_{CE}$  $h_{FE} - I_C$  $V_{BE(sat)}, V_{CE(sat)} - I_C$  $I_C - V_{BE}$  $C_{ob} - V_{CB}$ 

T0-92

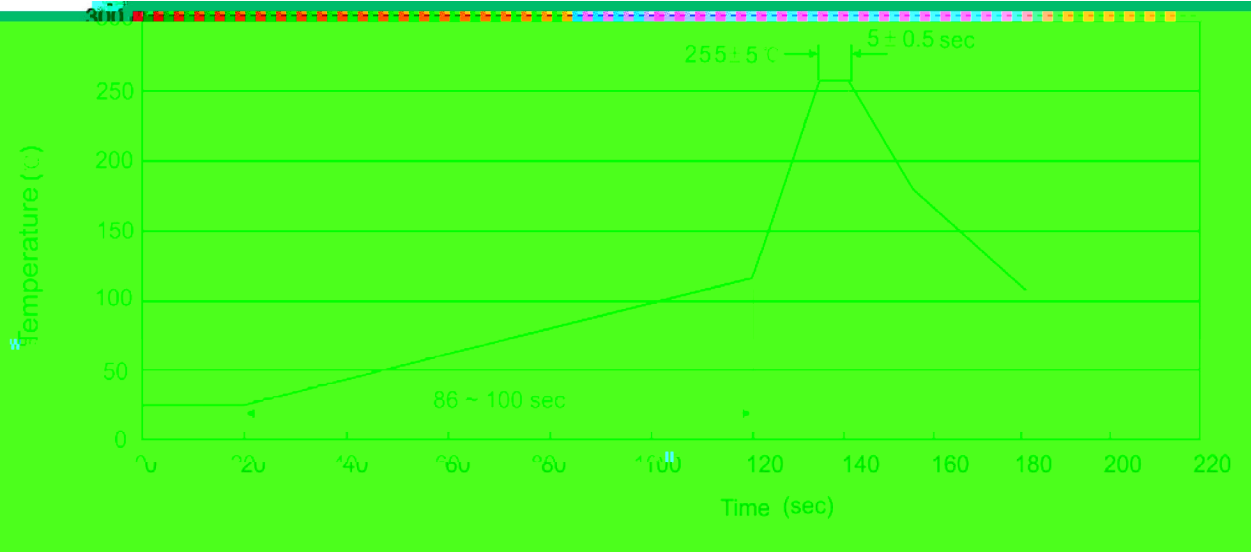
Unit: mm mm



/ Marking Instructions



() / Temperature Profile for Dip Soldering(Pb-Free)



/ Resistance to Soldering Heat Test Conditions

℃

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 袋	袋 盒	只 盒	盒 箱	只 箱	袋	盒	箱

封装形式	包装数量					包装尺寸	
	只 纸带	纸带 盒	纸带层 盒	盒 箱	只 箱	盒	箱
							小箱 , 大箱

/ Notices