

/ Descriptions


SOT-323 PNP

/ Features


BC817W

/ Applications

/ Equivalent Circuit



/ Pinning




/ Marking

/ Absolute Maximum Ratings(Ta=25 –)

			℃
			℃

/ Electrical Characteristics(Ta=25 –)


/ Electrical Characteristic Curve

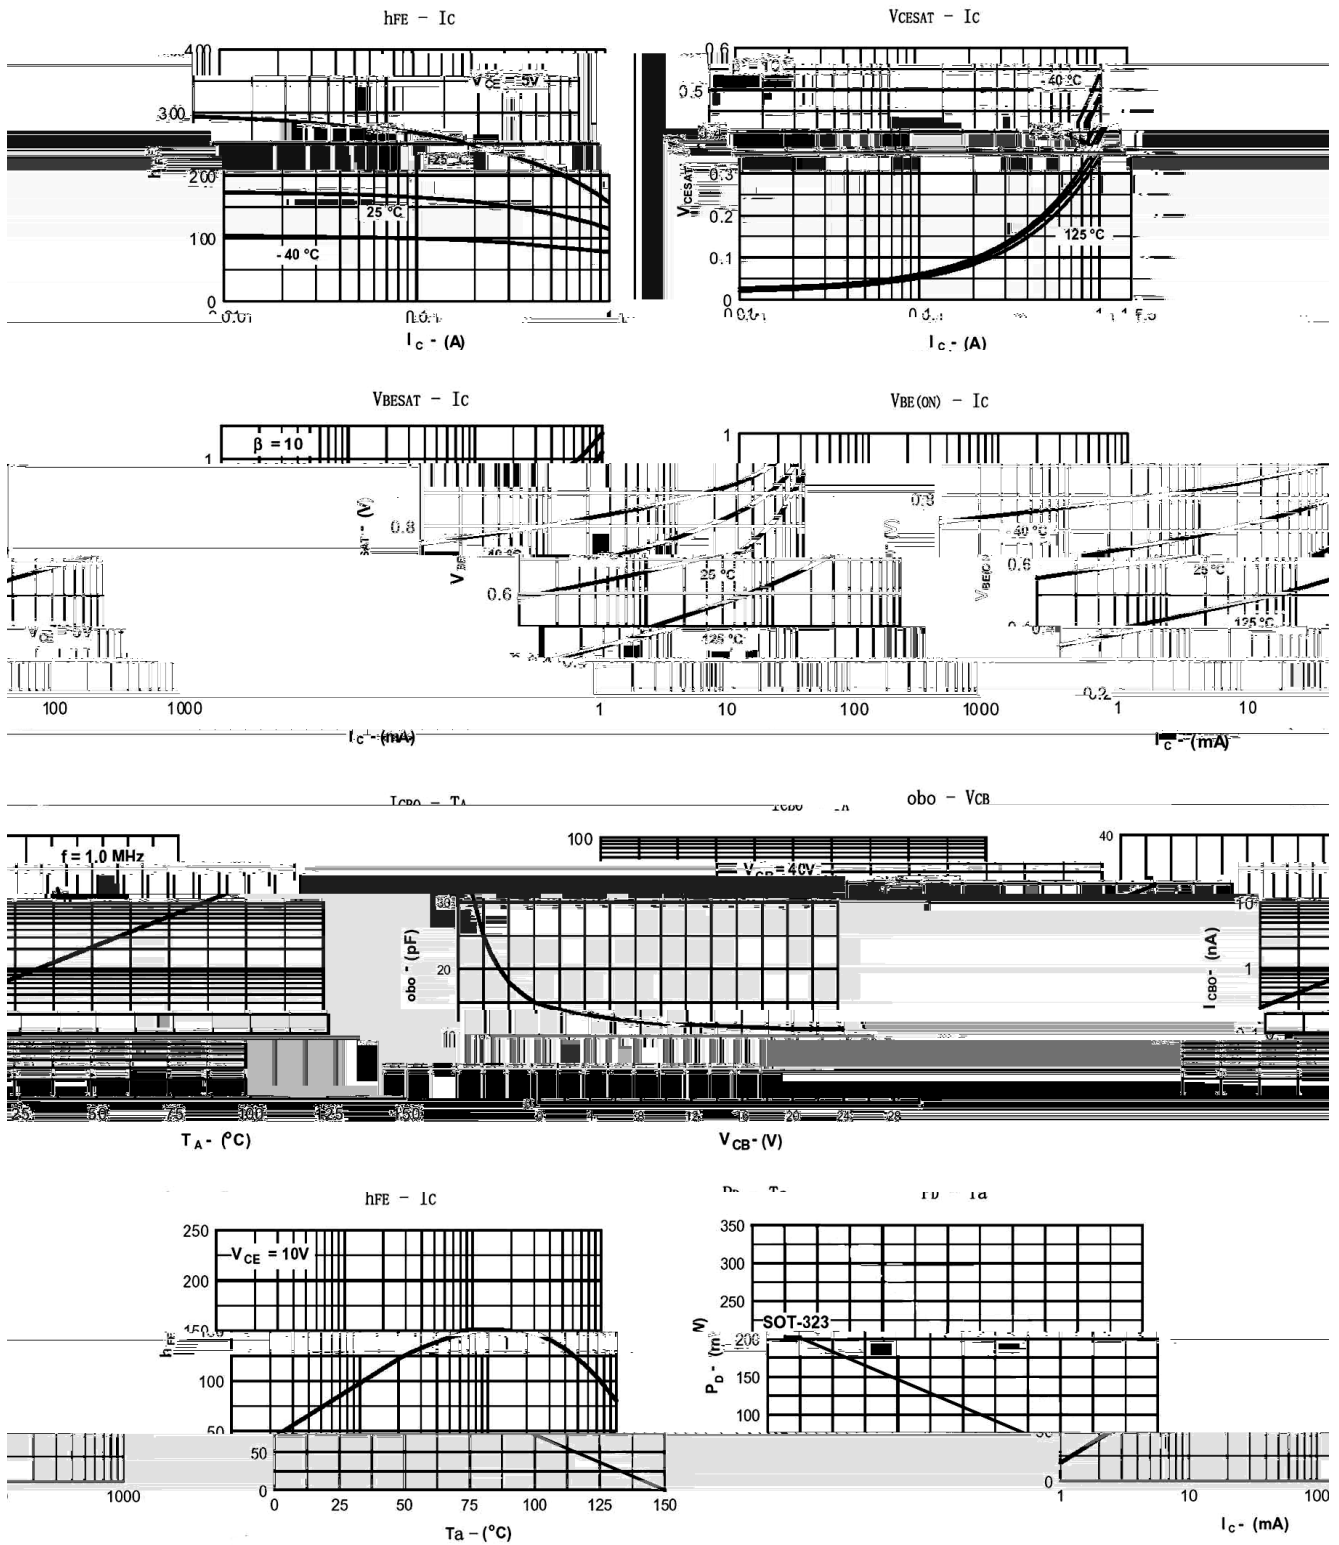


/ Package Dimensions

SOT-323


单位: mm

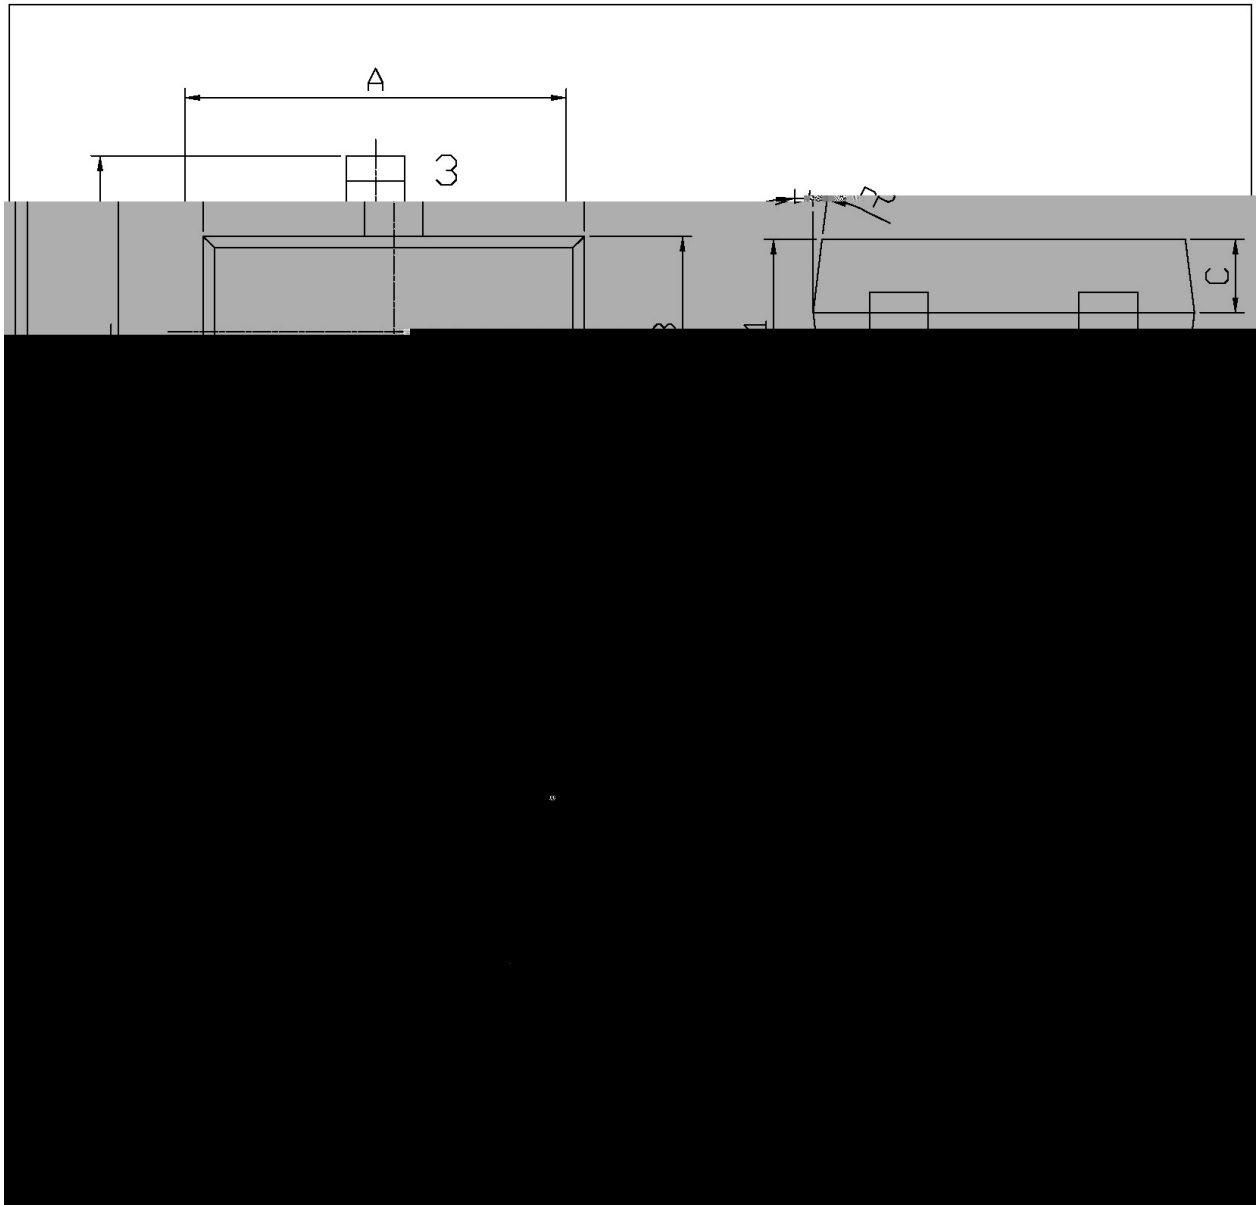

/ Marking Instructions

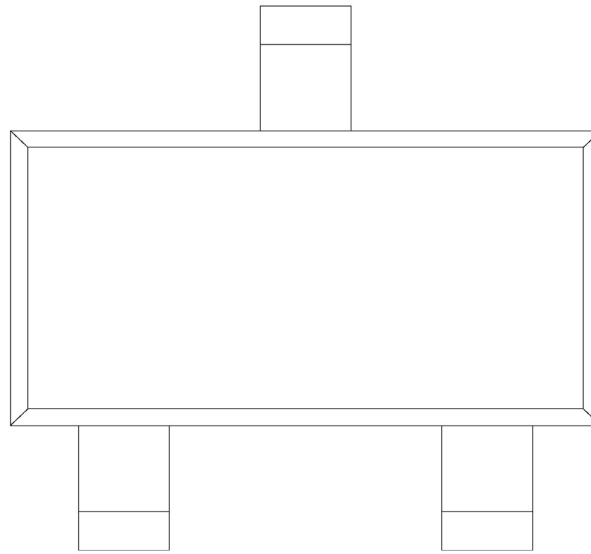

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,

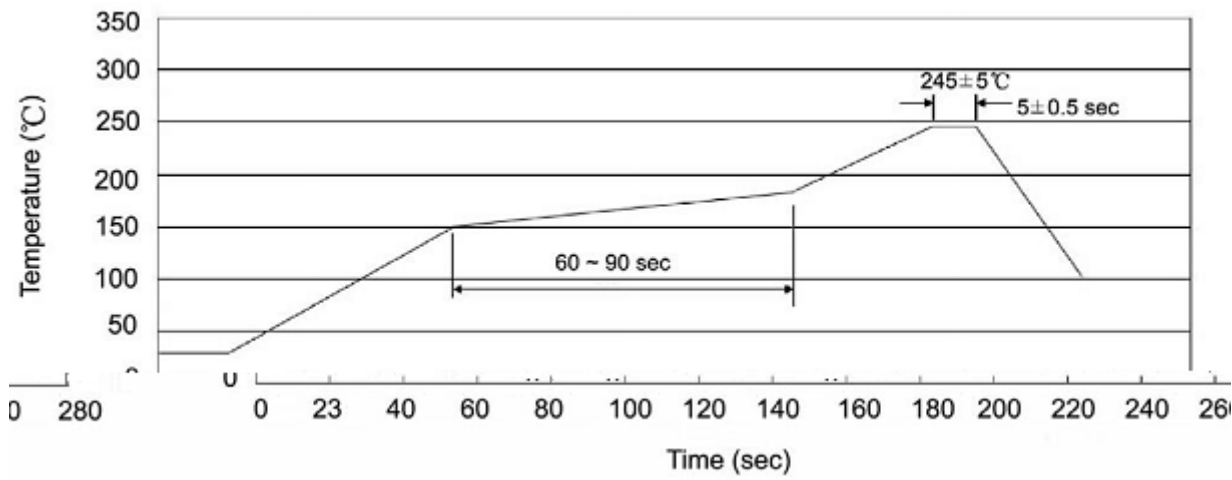

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ± °C

/ Packaging SPEC.

封装 式	包 装 量					包 装 尺 寸		
	Units/Reel /卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box /盒	Inner Boxes/Outer Box 盒/	Units/Outer Box /	Reel	Inner Box 盒	Outer Box
SOT-323	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices