


/ Descriptions


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning




/ h_{FE} Classifications & Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)


/ Electrical Characteristic Curve

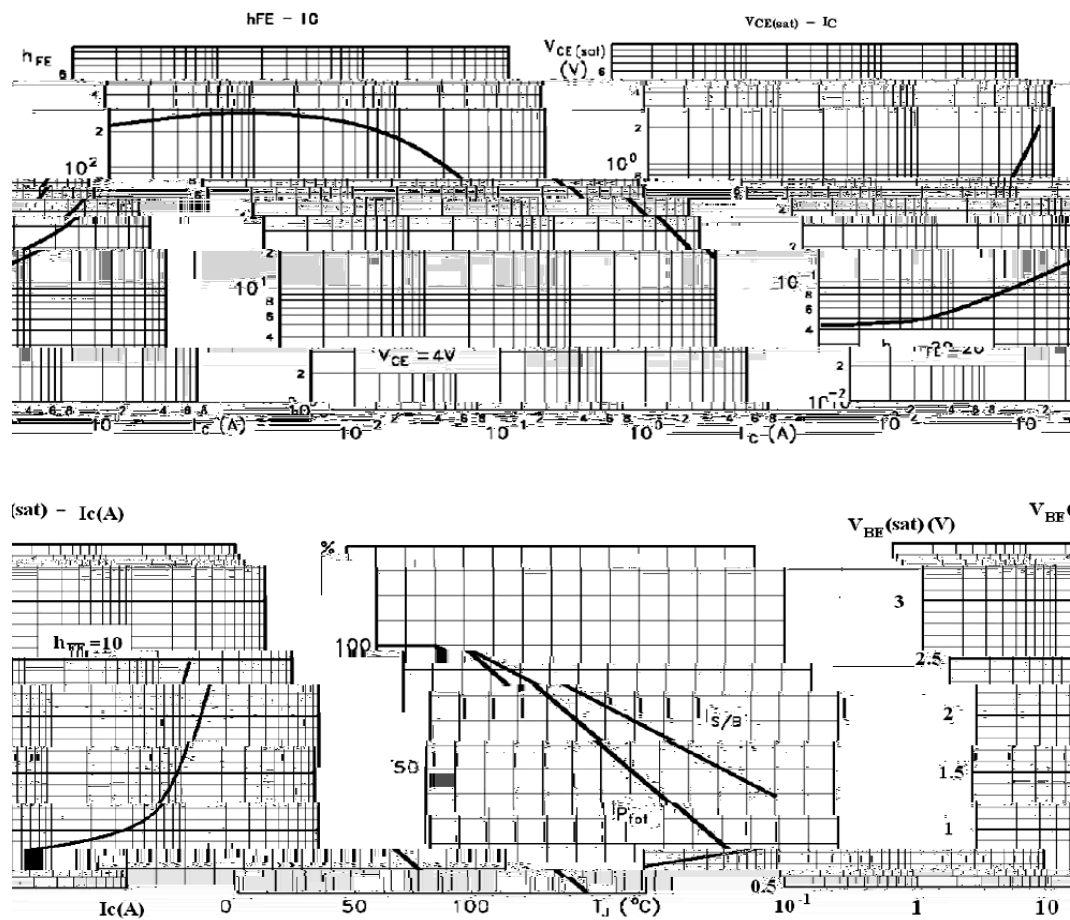

/ Package Dimensions

T0-220

单位:

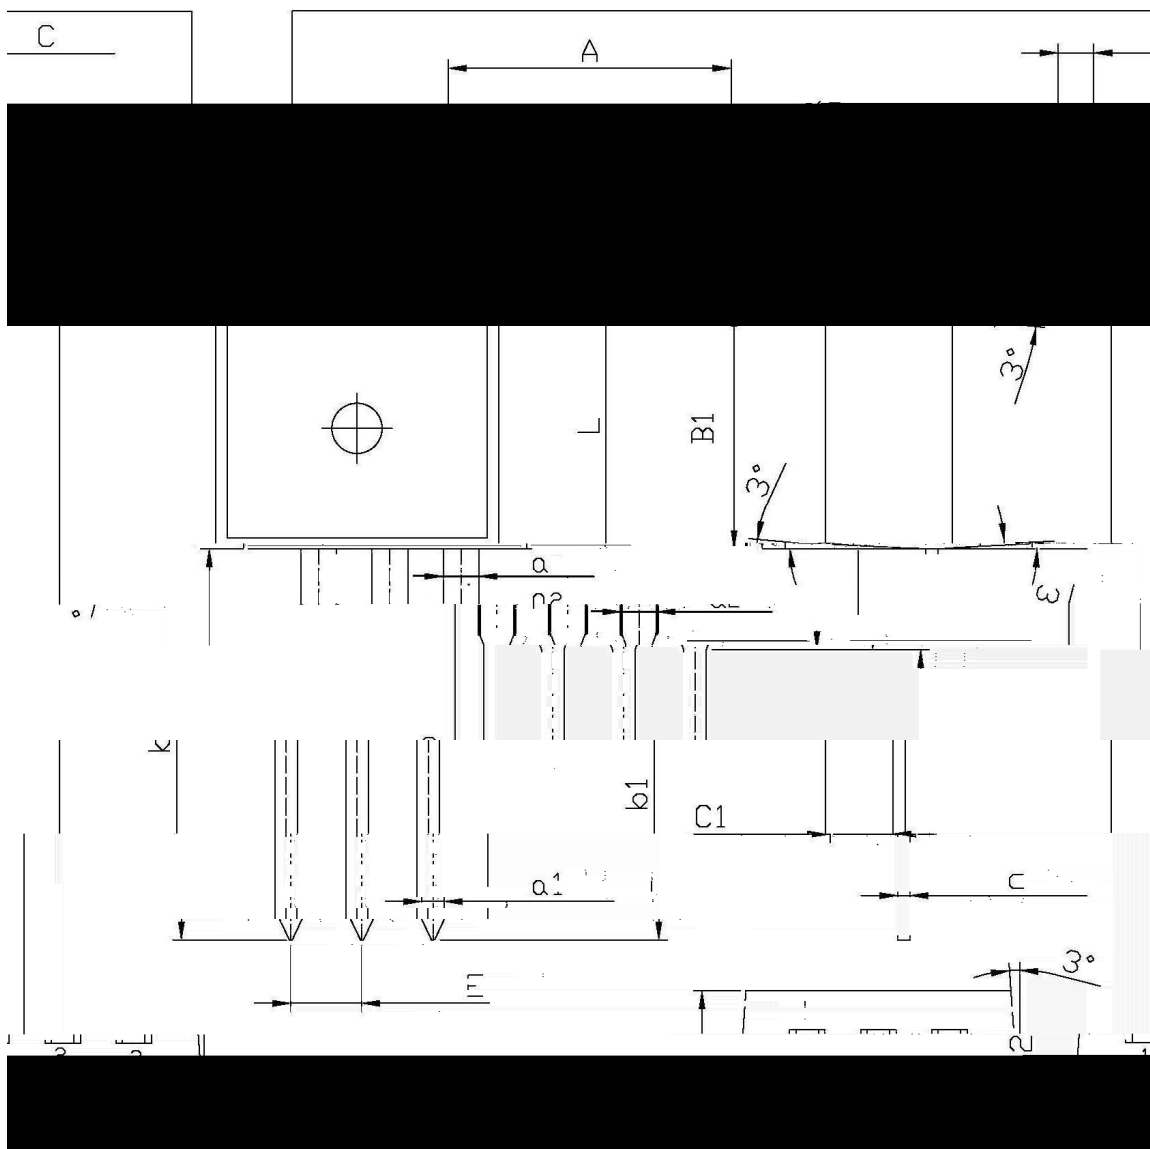


Dimensions in millimeters			Dimensions in millimeters		
Symbol	Min	Max	Symbol	Min	Max
Δ	9.8	10.2	ϕ	1.2	1.4
R	3.56	3.64	B	6.3	6.7
B_1	9.0	9.4	B_2	15.7	16.3
a_1	0.7	0.9	b_1	0.1	0.2
c	0.4	0.6	a	0.1	0.2
ϕ_2	4.3	4.7	E	0.2	0.3
ϕ_1	1.25	1.45			

/ Marking Instructions



() / Temperature Profile for Dip Soldering(Pb-Free)

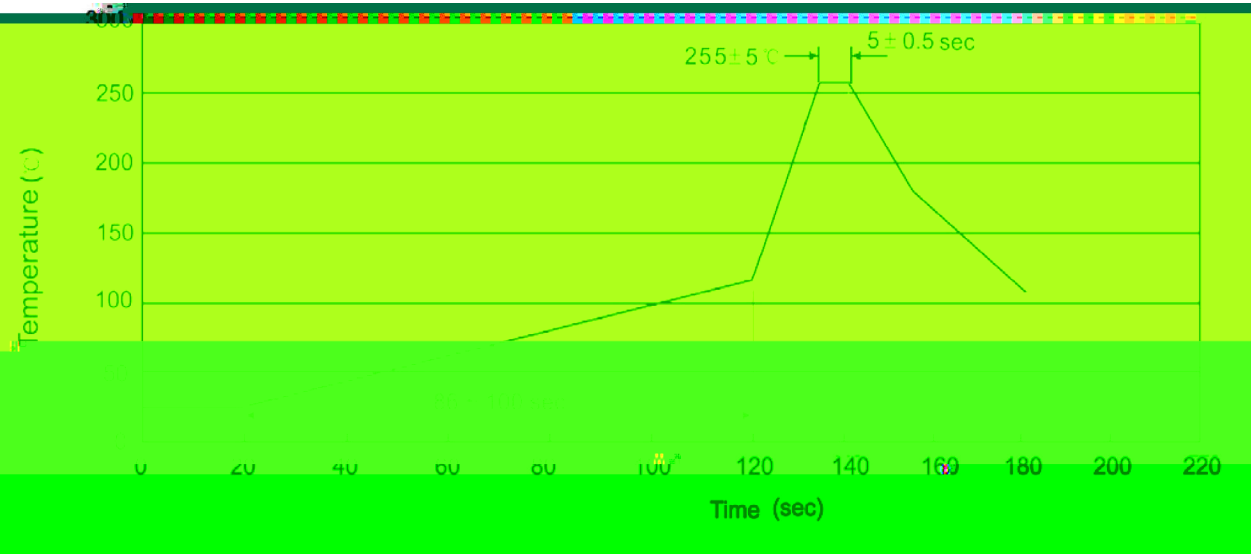

/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

/ Notices