



[()11 49.01()-222.01(.61 | 57.84 701.61 | h f 63 720.81 m 93 720.81 | 93 14.6222.l8 28 1 Tf 0 01l8 2 01ll h 51







SOD-323

Silicon Diode in a SOD-323 Plastic Package.

AEC-Q101

Fast switching diodes, Qualified to AEC-Q101 Standards for High Reliability, HF Product.

Small signal diode, Meet the stringent requirements of automotive applications.



PIN1:Cathode

PIN2:Anode

Marking

QA2





Parameter	Symbol	Rating	Unit
Reverse Voltage	V_R	75	V
Peak Reverse Voltage	V_{RM}	100	V
Average Rectified Output Current	I_O	150	mA
Forward Continuous Current	I_{FM}	300	mA
Non-Repetitive Peak Forward Surge Current	$I_{FSM} (t=1.0\mu s)$	2.0	A
	$I_{FSM} (t=1.0s)$	1.0	A
Power Dissipation	P_{tot}	200	mW
Junction Temperature	T_j	150	°C
Storage Temperature Range	T_{stg}	-55~150	°C
Thermal Resistance Junction to Ambient Air	$R_{\theta JA}$	625	°C/W


Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Forward Voltage	V_F	$I_F=10mA$			1.0	V
Instantaneous Reverse Current	I_R	$V_R=20V$			25	nA
		$V_R=75V$			5	μA
		$V_R=20V \quad T_j=150^\circ C$			50	μA
Capacitance	C_{tot}	$V_F=V_R=0V$			4	pF
Reverse Recovery Time	t_{rr}	$I_F=10mA \quad V_R=6.0V$ $I_R=1mA \quad R_L=100\Omega$			4	ns
Voltage Rise when Switching On tested	V_{fr}	$t_p=0.1\mu s \quad f_p=5to100kHz$ Time<30ns			2.5	V
Total Capacitance	C_T	$V_R=0 \quad f=1.0MHz$			2.0	pF



Rev.A Jun.-2022

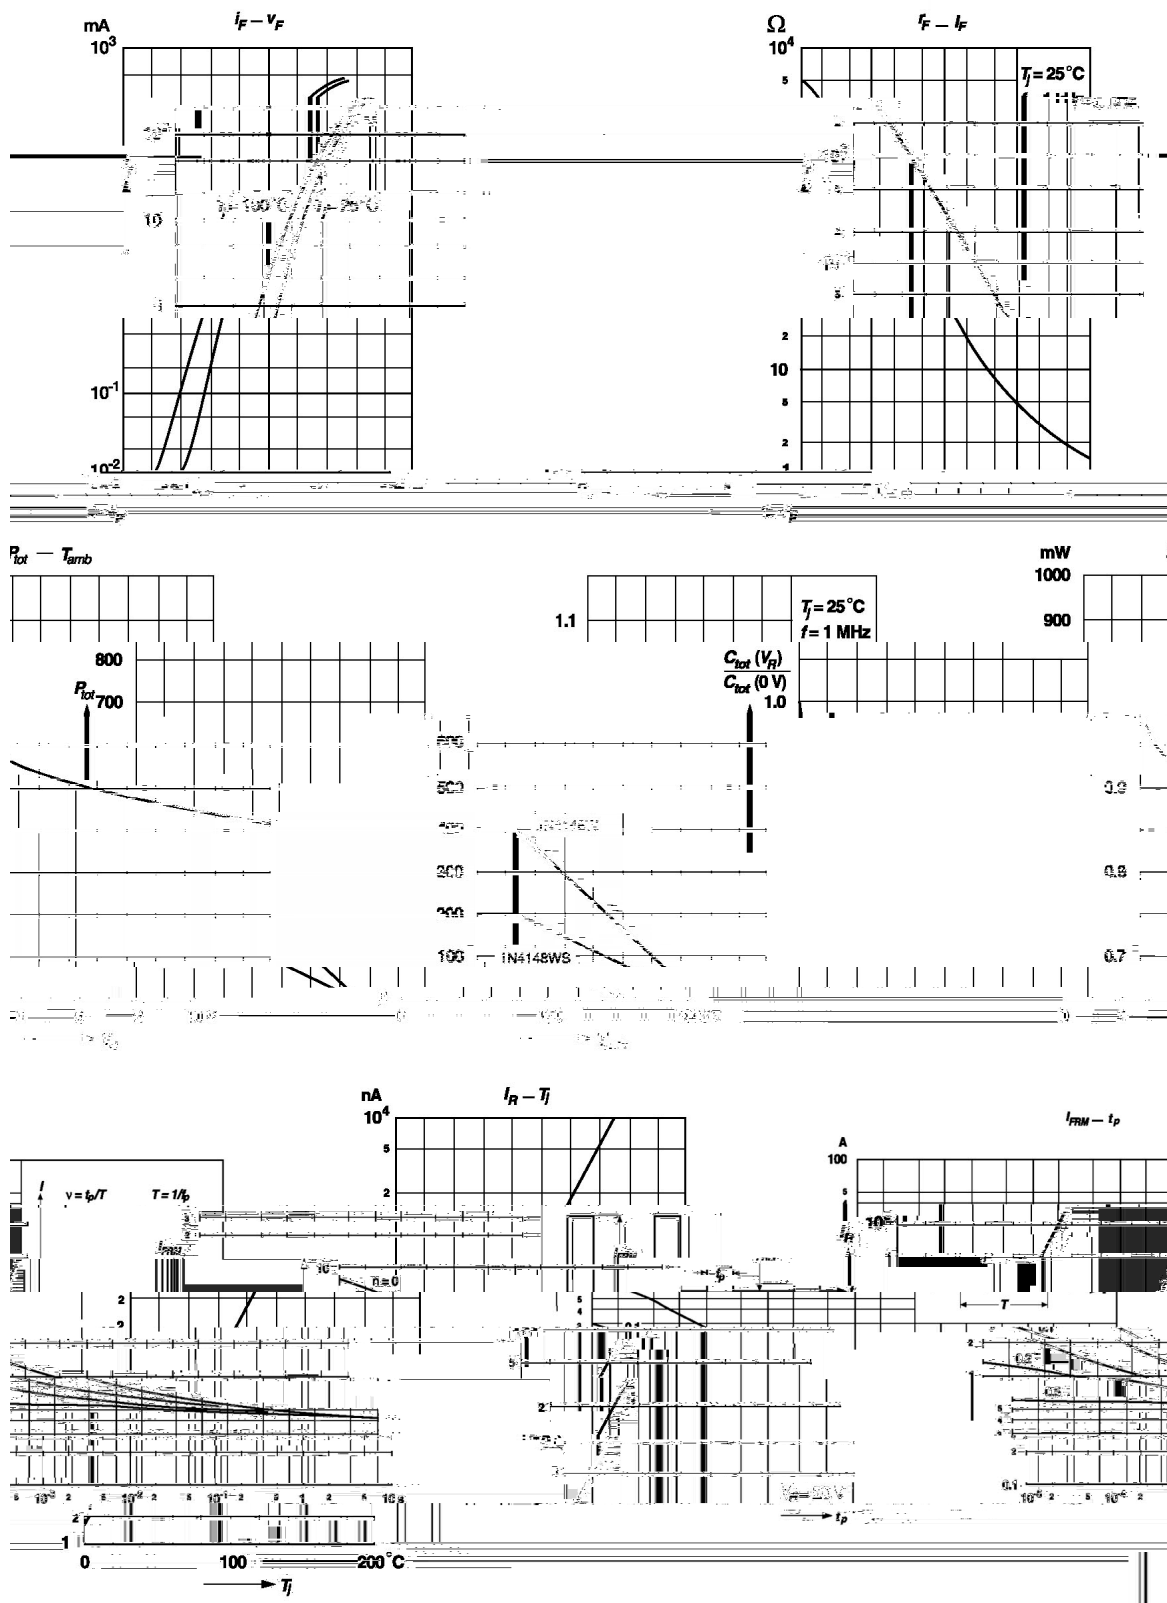

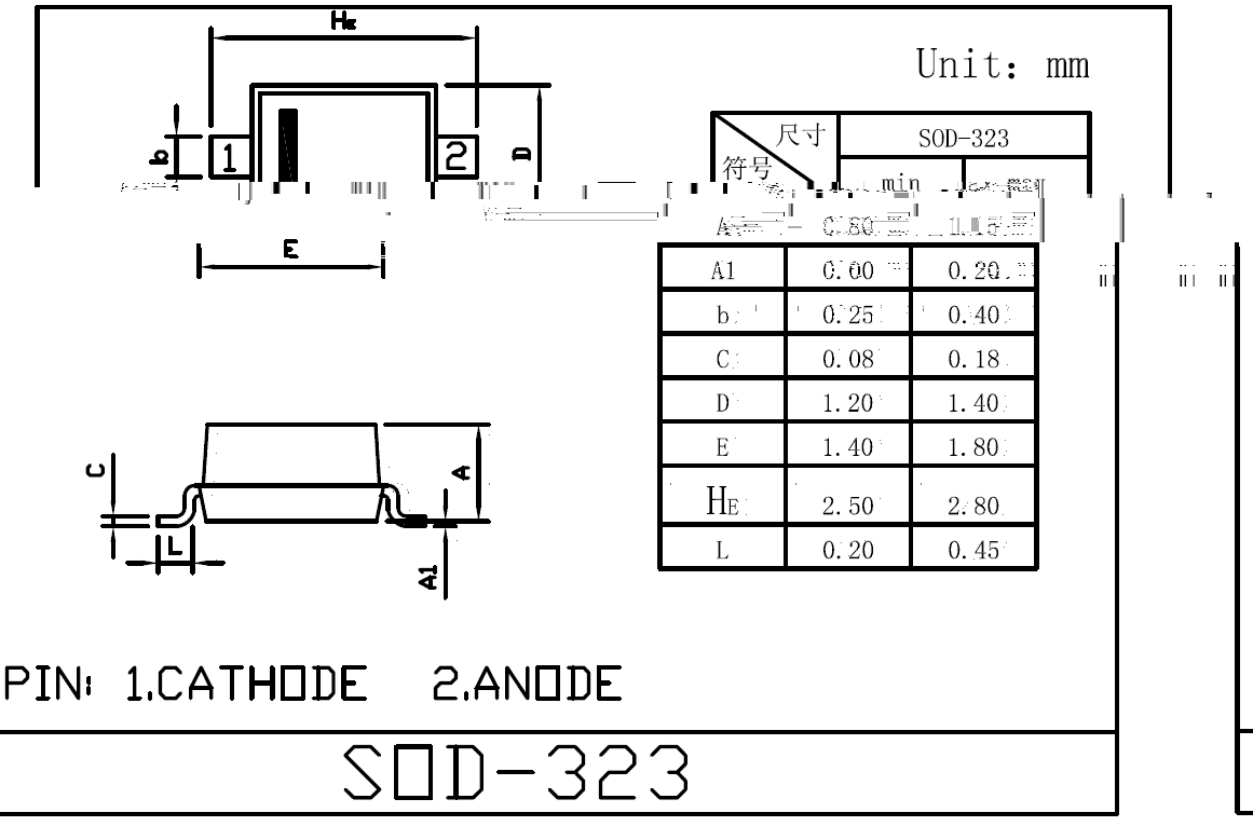

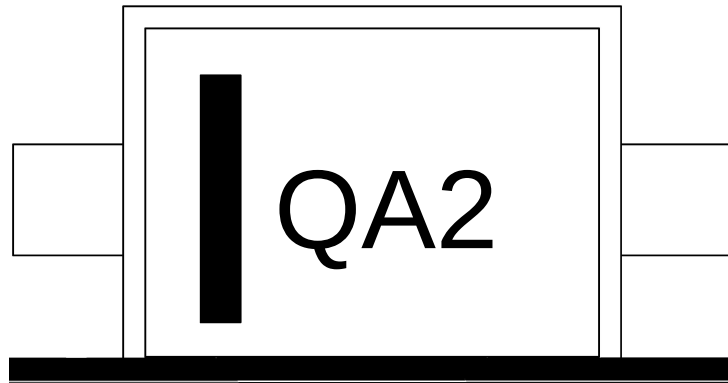

Q

A2

Note:

Q: Automobile halogen-free product Code

A2: Product Type



Temperature Profile for IR Reflow Soldering(Pb-Free)

说明：

- 1、预热温度 150 ~ 200℃，时间 60 ~ 120sec;
- 2、峰值温度 255±5℃，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10℃/sec.

Note:

- 1.Preheating:150~200℃, Time:60~120sec.
- 2.Peak Temp.:255±5℃, Duration:5±0.5sec.
- 3. Cooling Speed: 2~10℃/sec.

温度：260±5℃ 时间：10±1 sec. Temp.:260±5℃ Time:10±1 sec

卷盘包装 / REEL

Package Type	Units					Dimension		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	(unit mm ³) Outer Box