

/ Descriptions

N

/ Features


500V HBM

AEC-Q101


HBM , Qualified to AEC-Q101 Standards for High Reliability,
HF Product.

/ Applications

/ Equivalent Circuit



/ Pinning

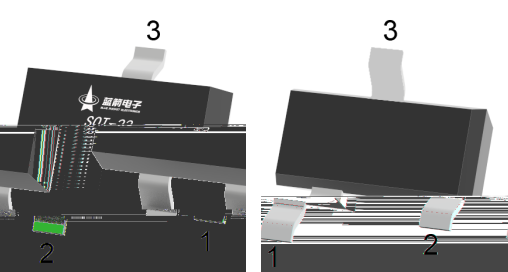

/ Marking


--	--



≤ μ ≤

		μ				
		μ				
						Ω
						μ
						μ
		Ω ≈ Ω				


/ Electrical Characteristic Curve

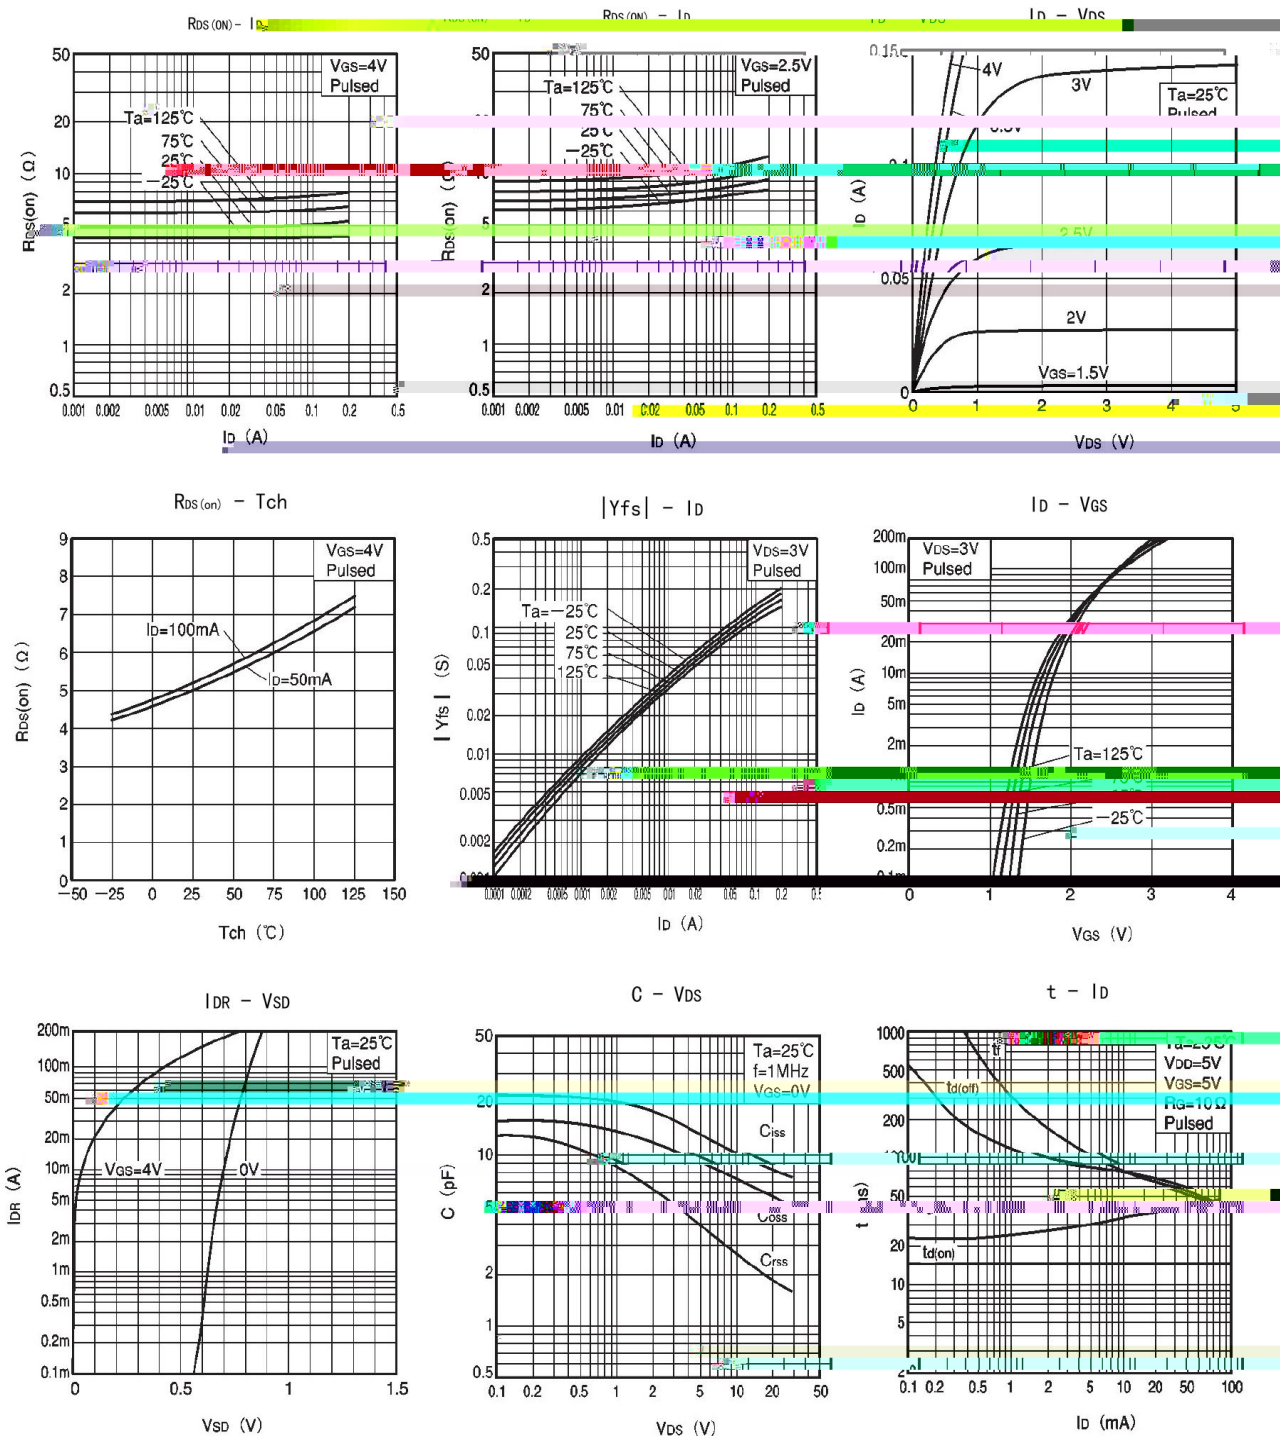


/ Package Dimensions

SOT-23

单位: mm

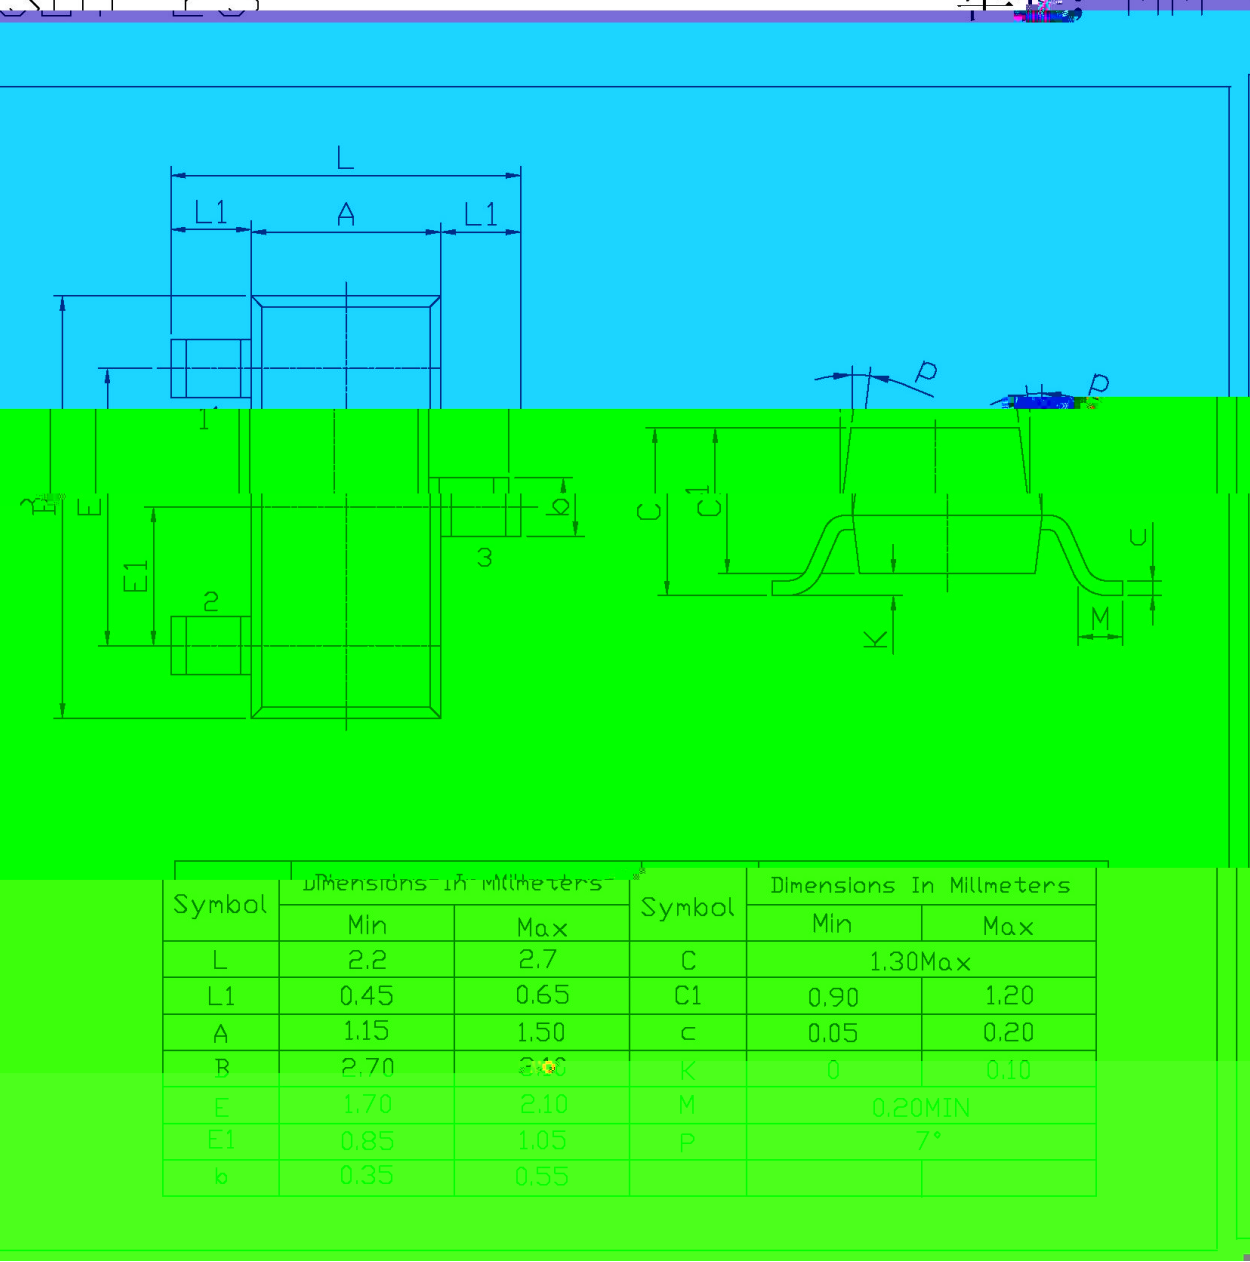

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

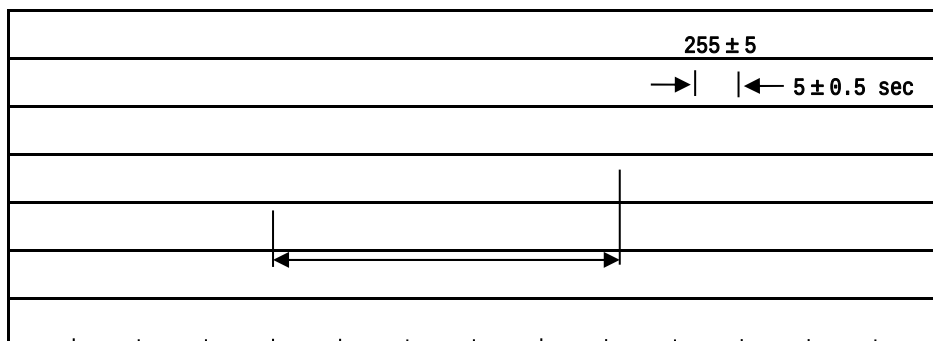
$$\pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm$$
/ **Resistance to Soldering Heat Test Conditions**
$$\pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm$$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
SOT-23	3,000	10	30,000	6	180,000	7 ×8	180×120×180	390×385×205

/ Notices