

/ Descriptions


SOP-8 P MOS

/ Features


○

/ Applications

/ Equivalent Circuit



/ Pinning



/ Marking

--	--

/ Absolute Maximum Ratings(Ta=25)

	℃		
	℃		
			℃
			℃
	θ		℃

≤

/ Electrical Characteristics(Ta=25)


		μ				
						μ
		μ				
						Ω

/ Electrical Characteristics(Ta=25)


						Ω
		Ω				

≤ μ ≤


/ Electrical Characteristic Curve

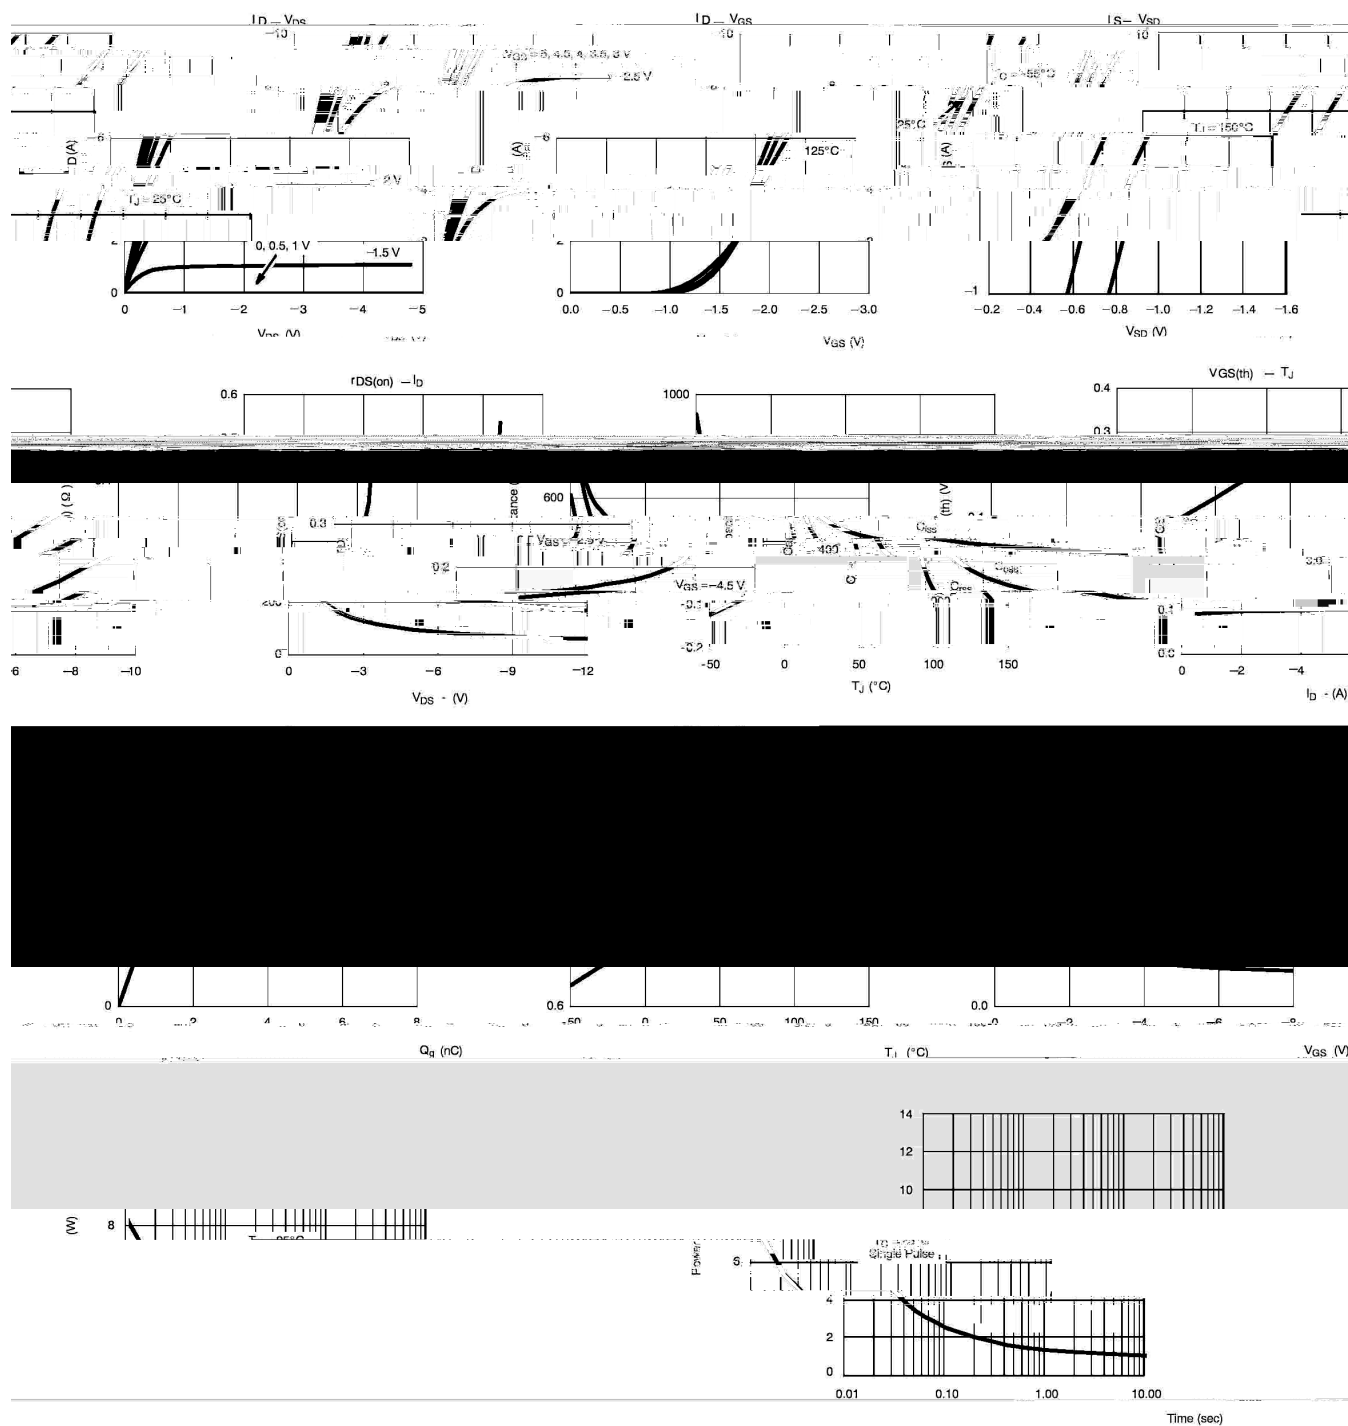


Technical drawing of a mechanical assembly. The drawing shows a cross-section of a component with a central hole. Dimensions are indicated: a total width of 100, a central hole diameter of 10, and a distance of 50 from the center to the right edge. The drawing is labeled with '100', '10', and '50'.

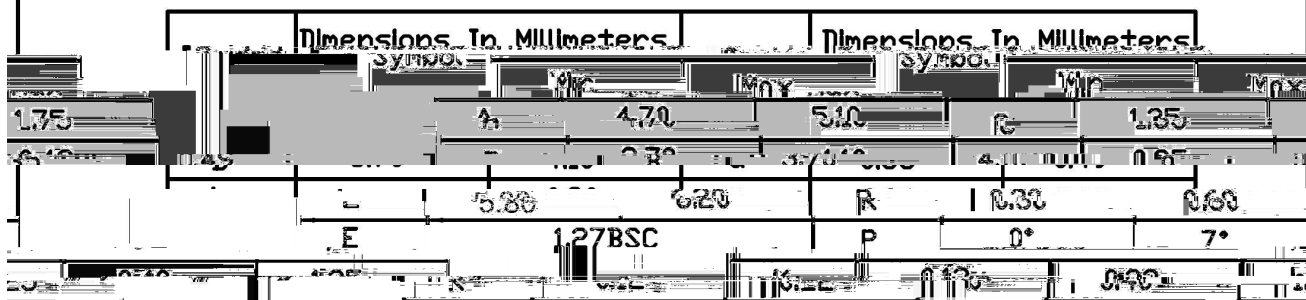

/ Marking Instructions

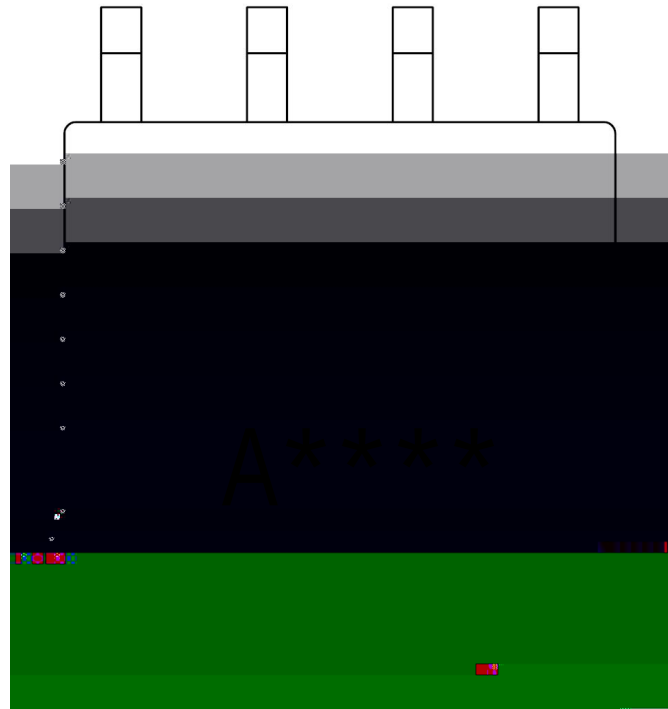

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

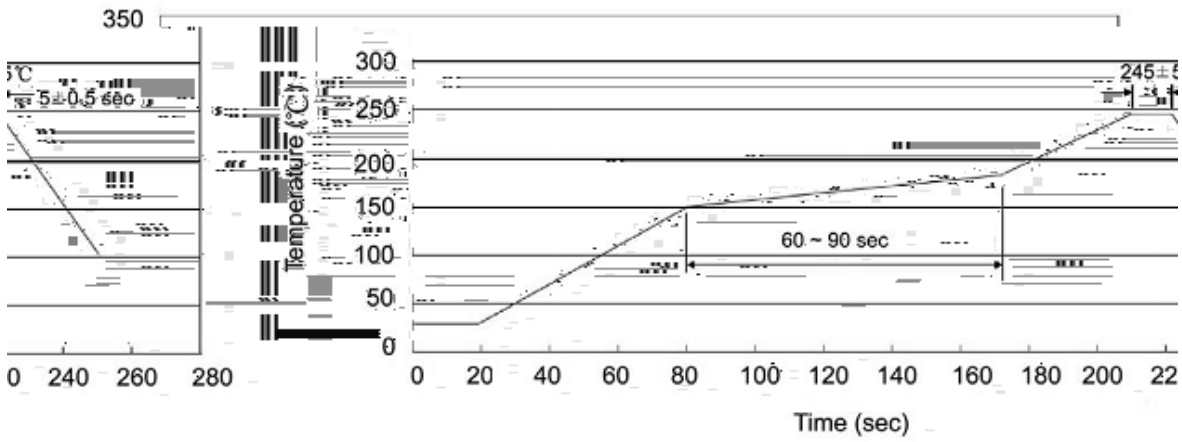
$$\pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm \qquad \qquad \qquad \pm$$

/ Resistance to Soldering Heat Test Conditions

 $\pm \qquad \qquad \qquad \pm \qquad \qquad \qquad ^\circ\text{C}$

/ Packaging SPEC.

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱
SOP/ESOP-8	4,000	2	8,000	6	48,000	13" ×12	360×360×50	380×335×366

/ Notices