


/ Descriptions

/ Features


1.5A,

/ Applications

/ / Equivalent Circuit or Application Circuit

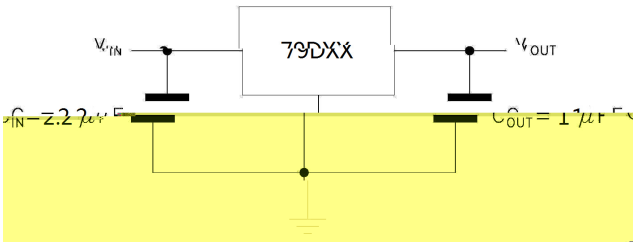

/ Pinning

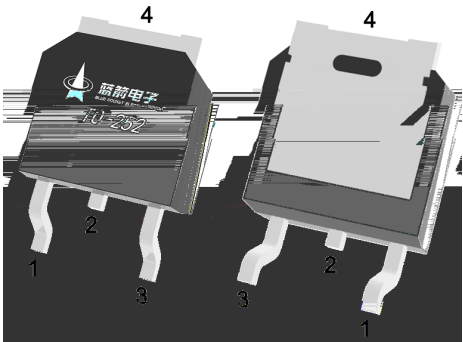


/ Marking

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics
(Ta=25 Vi=-23V,Io=500mA Ci=2.2μF, Co=1μF, unless otherwise specified)

/ Package Dimensions

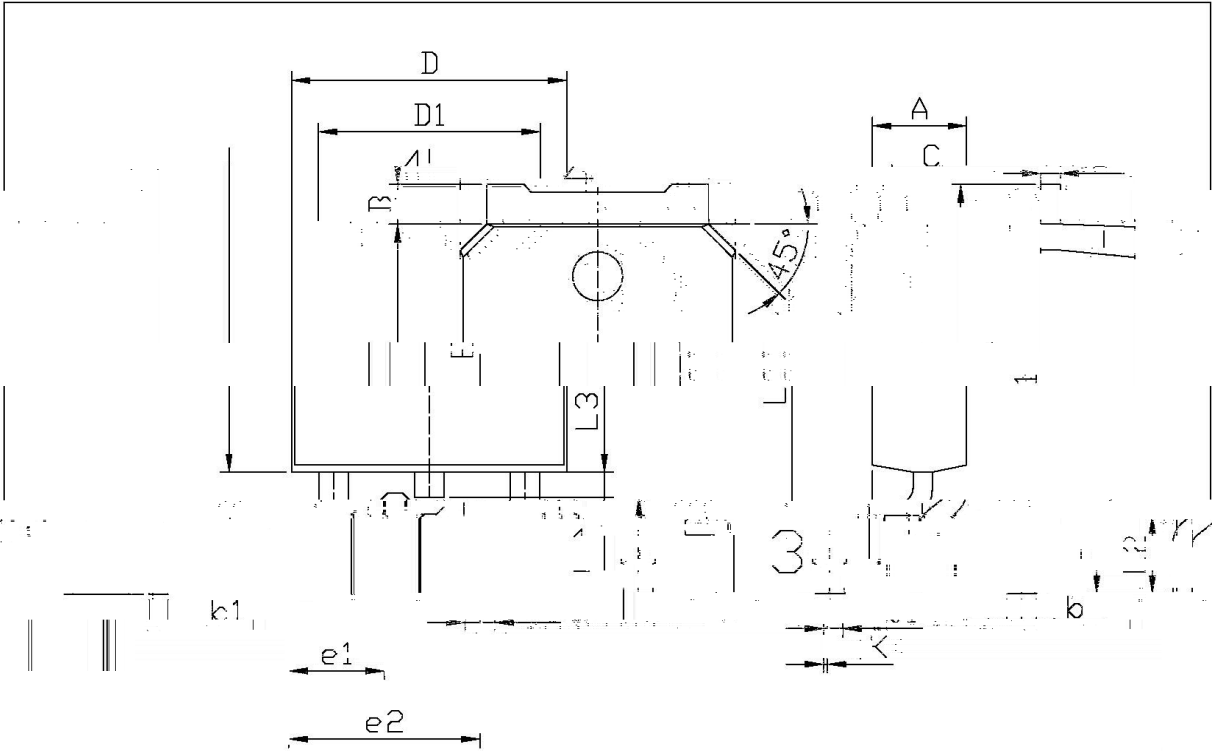


单位: mm

Dimensions In Millimeters			Dimensions In Millimeters		
Symbol	Min	Max	Symbol	Min	Max
A	2.20	2.20	b1	0.45	0.55
A1	0.95	1.25	L1	2.00	2.00
B	2.24	2.34	L2	0.90	0.90
C	0.70	0.70	L3	0.60	0.60
D	9.85	10.35	L	6.75	6.75
D1	5.50	5.50	K	0.00	0.10
E	0.45	0.55			
L1	2.00	2.00			
L2	0.90	0.90			
L3	0.60	0.60			
L	6.75	6.75			
K	0.00	0.10			

T0-252

/ Marking Instructions

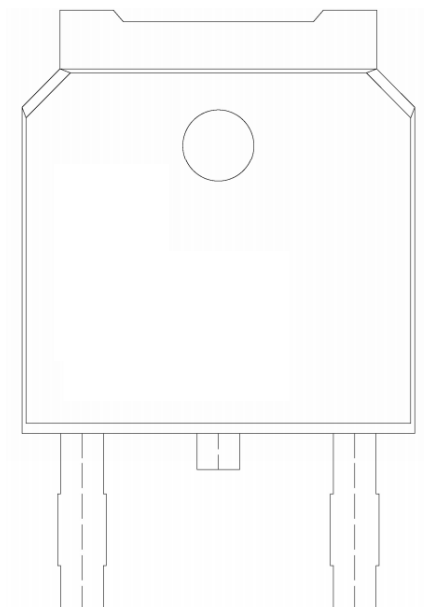

BR

79D15

 $\pm$ $\pm$

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box