




BRBZT52CXXXSQ



DATA SHEET

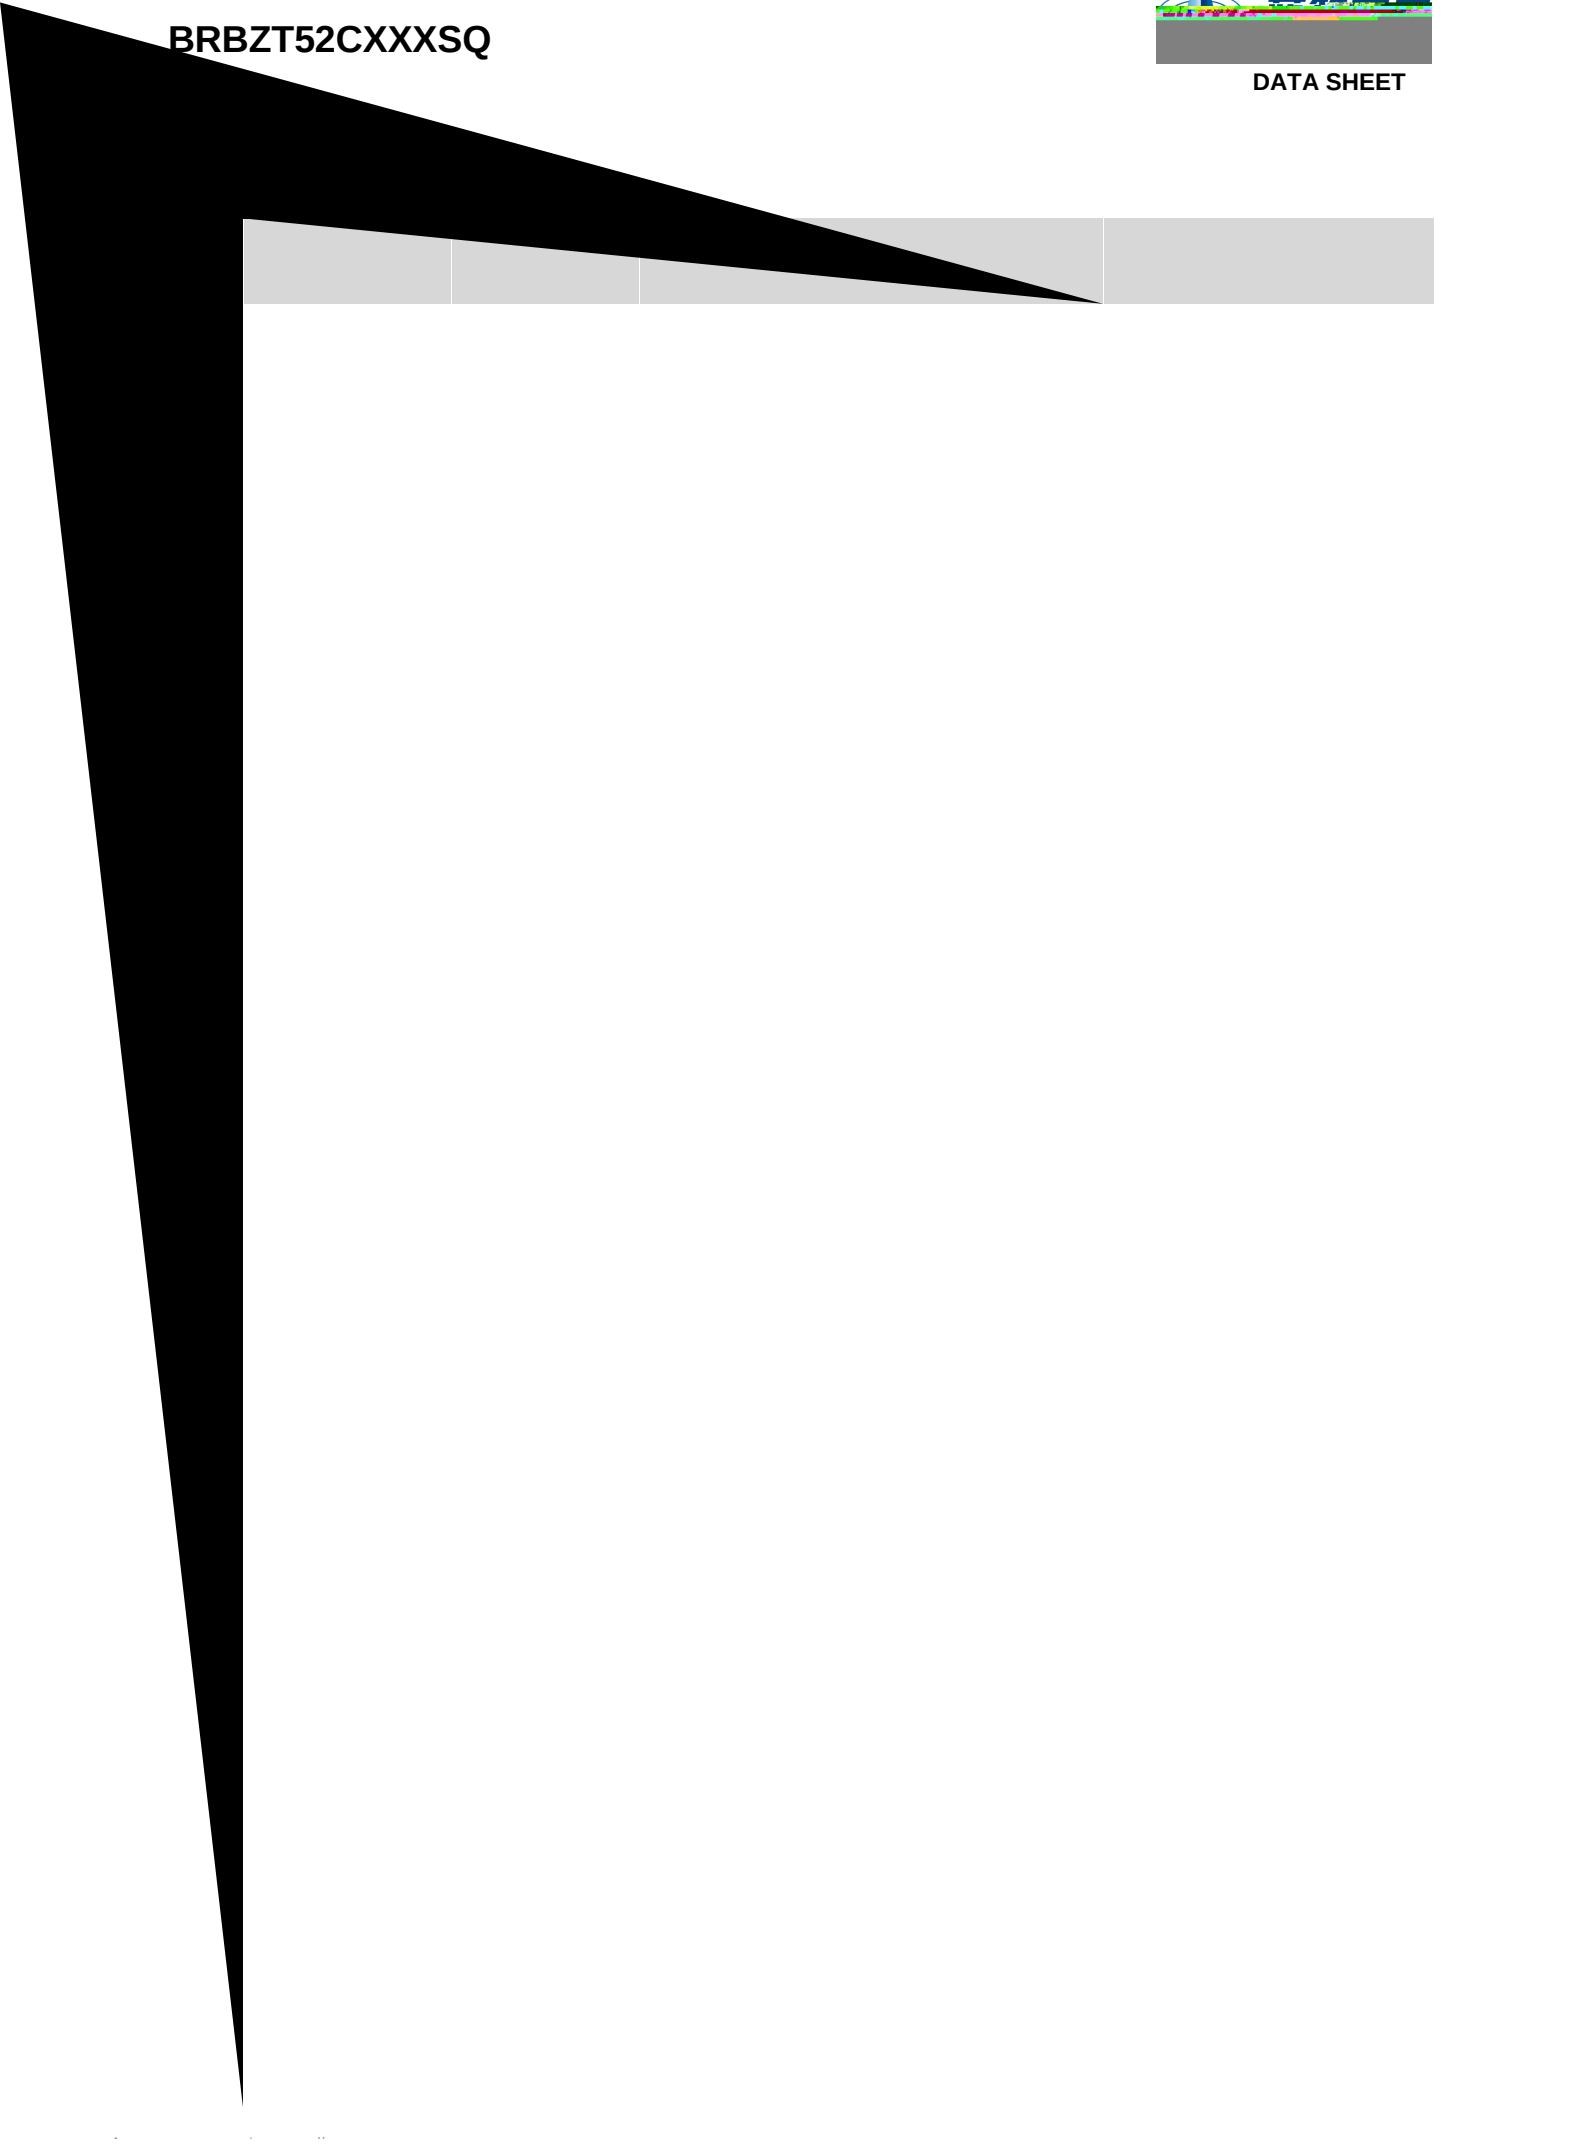




/ Descriptions

/ Features

/ Applications

2.4V-39V

/ Equivalent Circuit




/ Pinning



/ Marking


参数	符号	数值	单位
			℃
		~	℃

BRBZT52CXXSQ




DATA SHEET

/ Electrical Characteristics(Ta=25)





/ Electrical Characteristic Curve






/ Package Dimensions

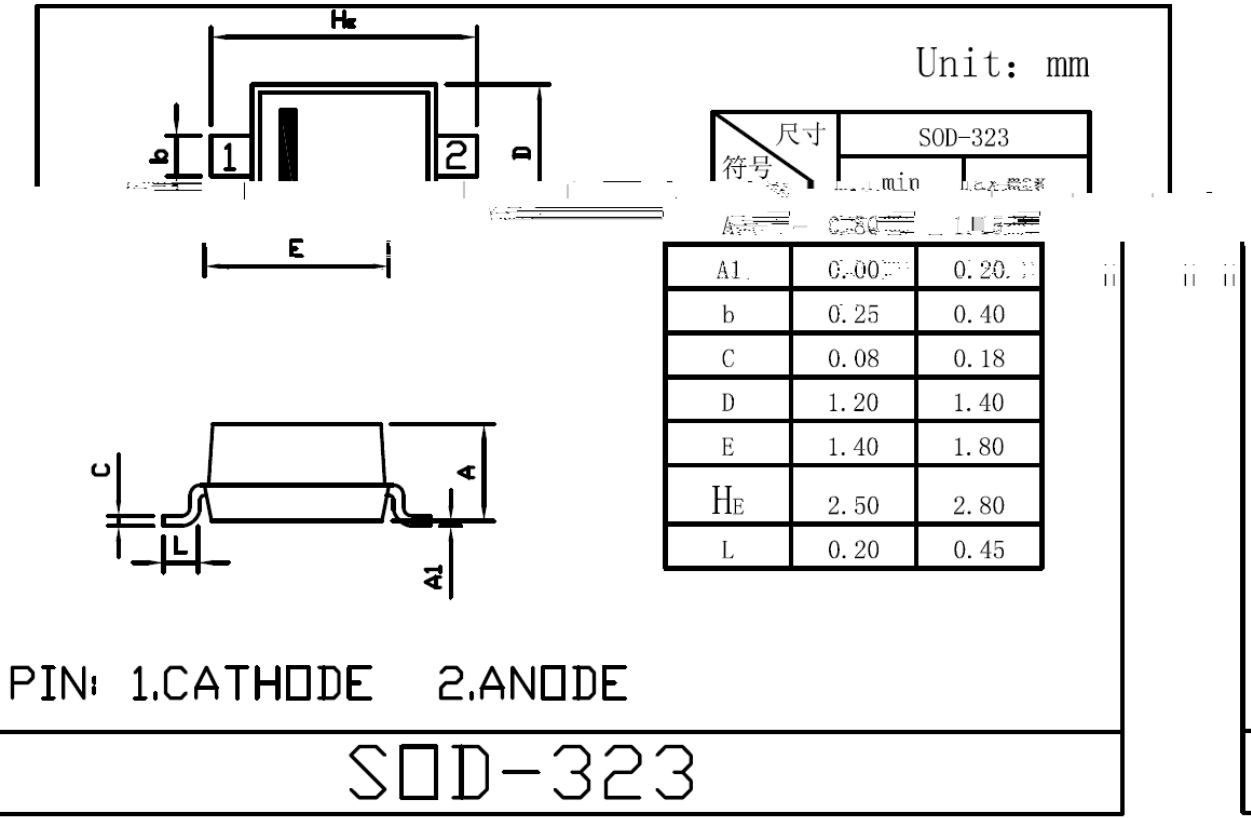





/ Marking Instructions

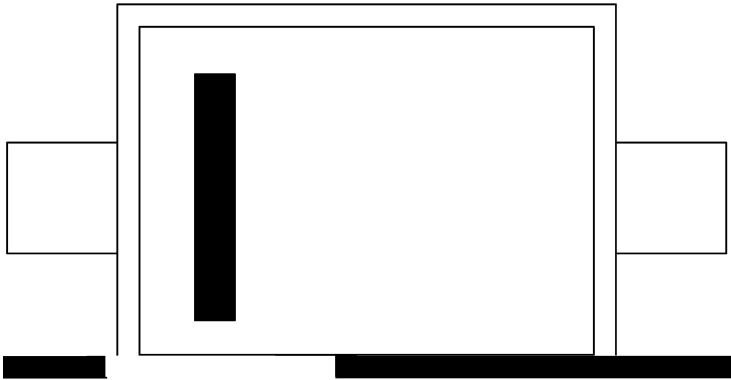

Q
WX



() / Temperature Profile for IR Reflow Soldering(Pb-Free)

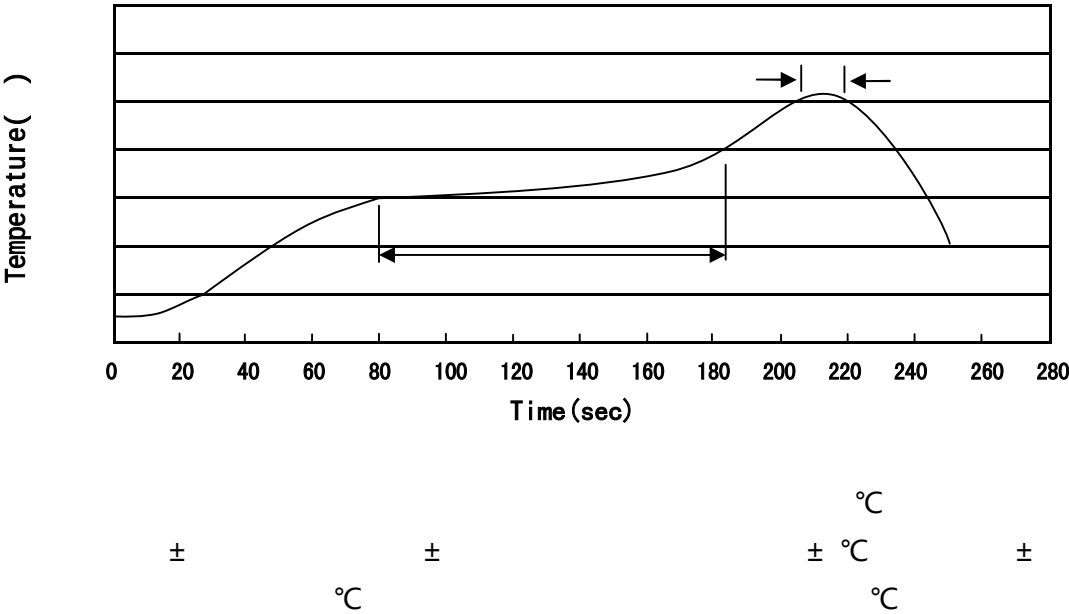

/ Resistance to Soldering Heat Test Conditions

± °C ± °C ± °C ± °C

/ Packaging SPEC.

	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box	Outer Box
SOD-323	3,000	10	30,000	6	180,000	7" ×8	180×120×180	390×385×205

/ Notices