



EUF06463GPH	PRVIHW	Q	Qτ	H	H
PRVIHW	Q				
EUF06463GPH	VRW5608			τ	

- ◆ 49 pΩ PRVIHWψ
- ◆ VRW5608 ψ
- ◆ ψ
- ◆ s ψ
- ◆ 618 μD ψ
- ◆ 319 μD
- ◆

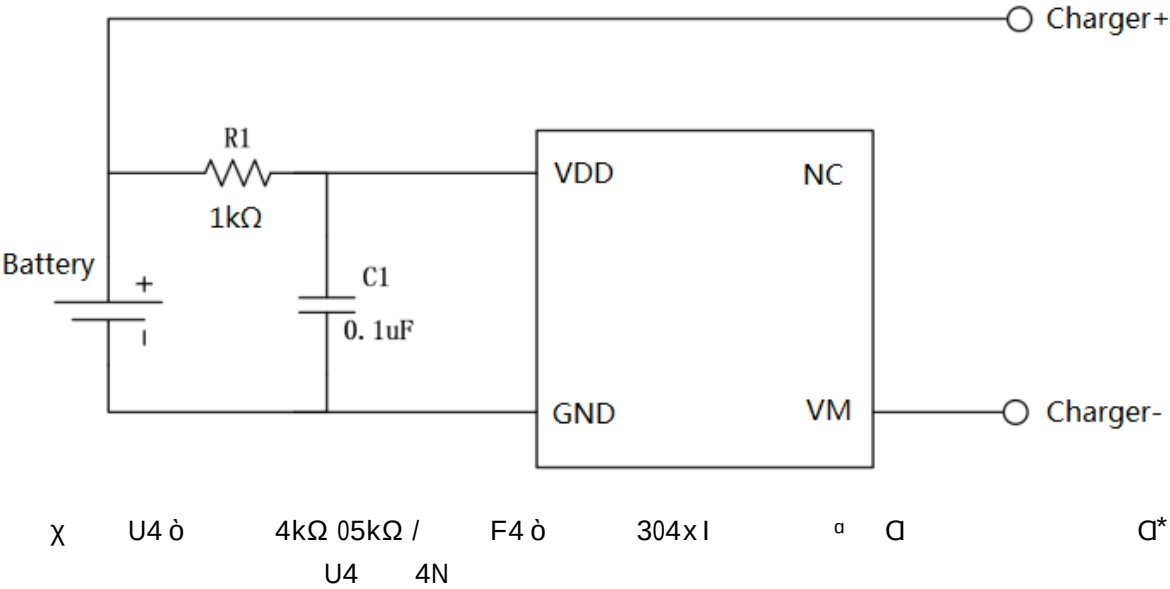

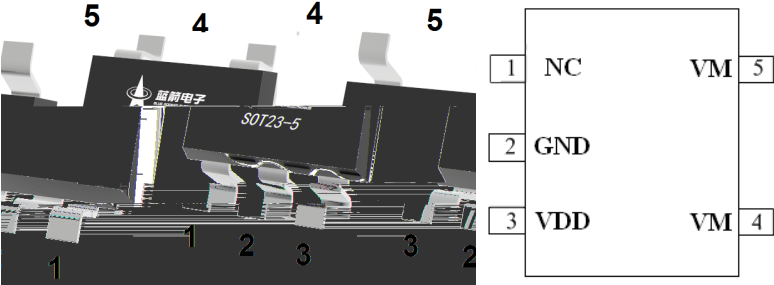


Siq Qx p ee u	Siq Qd p e	Siq Gevfuiswi r q
4	NC	
5	JQG	Q
6	VDD	
7/8	VP	

See Marking Instructions.

/Parameter	/Symbol	/Value	Ⓜ /Unit
V _{DD} input pin voltage	V _{IN}	-0.3 to +8	V
V _{VM} input pin voltage	V _{VM}	-8 to +10	V
Maximum Junction Temperature	T _J	-40 to +145	
Storage Temperature	T _{stg}	-55 to +145	
Power Dissipation	P _D (T _C)		

Parameter	Symbol	Test Condition	Min	ε Typ	Max	η Unit
Over-temperature protection	OTP			145		
Over-temperature protection release temperature	OTPR			120		
Overcharge Voltage Detection Delay Time	T _{OCV}			100		ms
Overdischarge Voltage Detection Delay Time	T _{ODV}			100		ms
Overdischarge Current1 Detection Delay Time	T _{IOV1}			8		ms
Overdischarge Current2 Detection Delay Time	T _{IOV2}			2		ms
Load Short-Circuiting Detection Delay Time	T _{SHORT}			150		μs

/

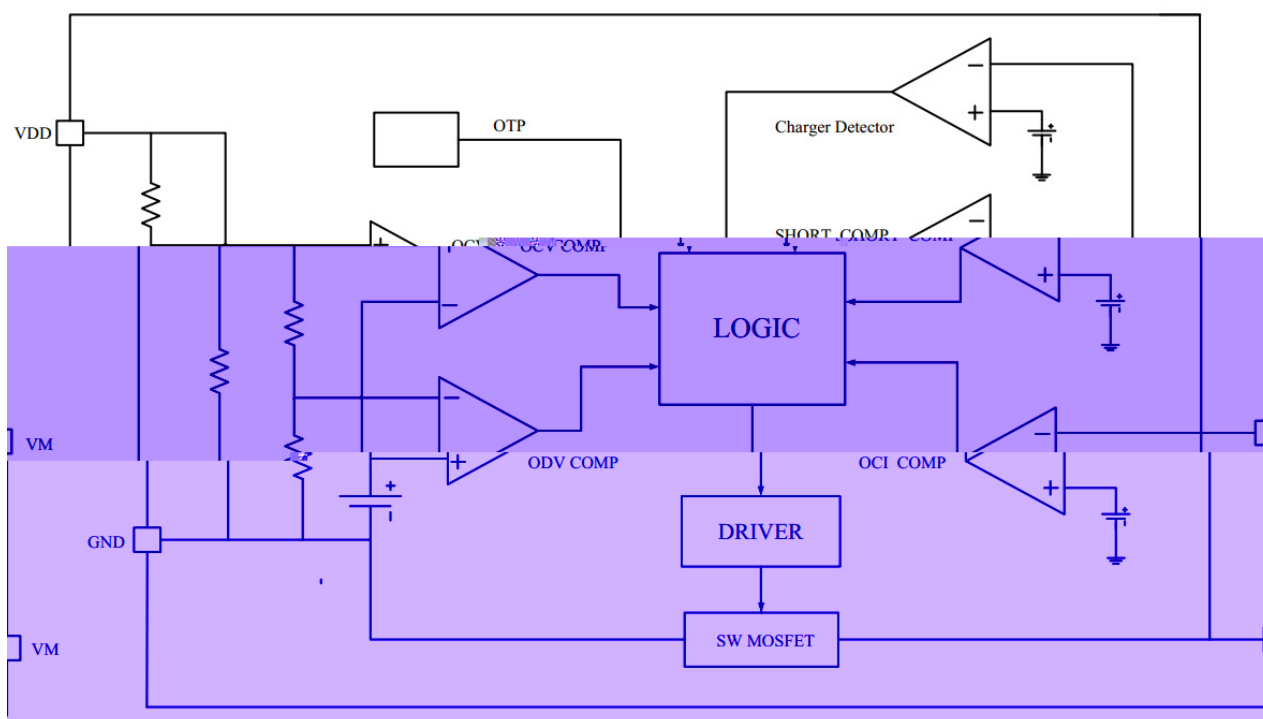

/

EUFO6463GPH í


Q PRVIHW ε 49 p Ω
EUFO6463GPH χ*

/

*


/


* ï +V_{RFV},
+W_{RFV}, EUFO6463GPH í PRVIHW ß
+W_{RFV}, π ï ï X
4 ï VP H +V_{EKD}, +V_{RFU},
5 ï +V_{r fy}, K

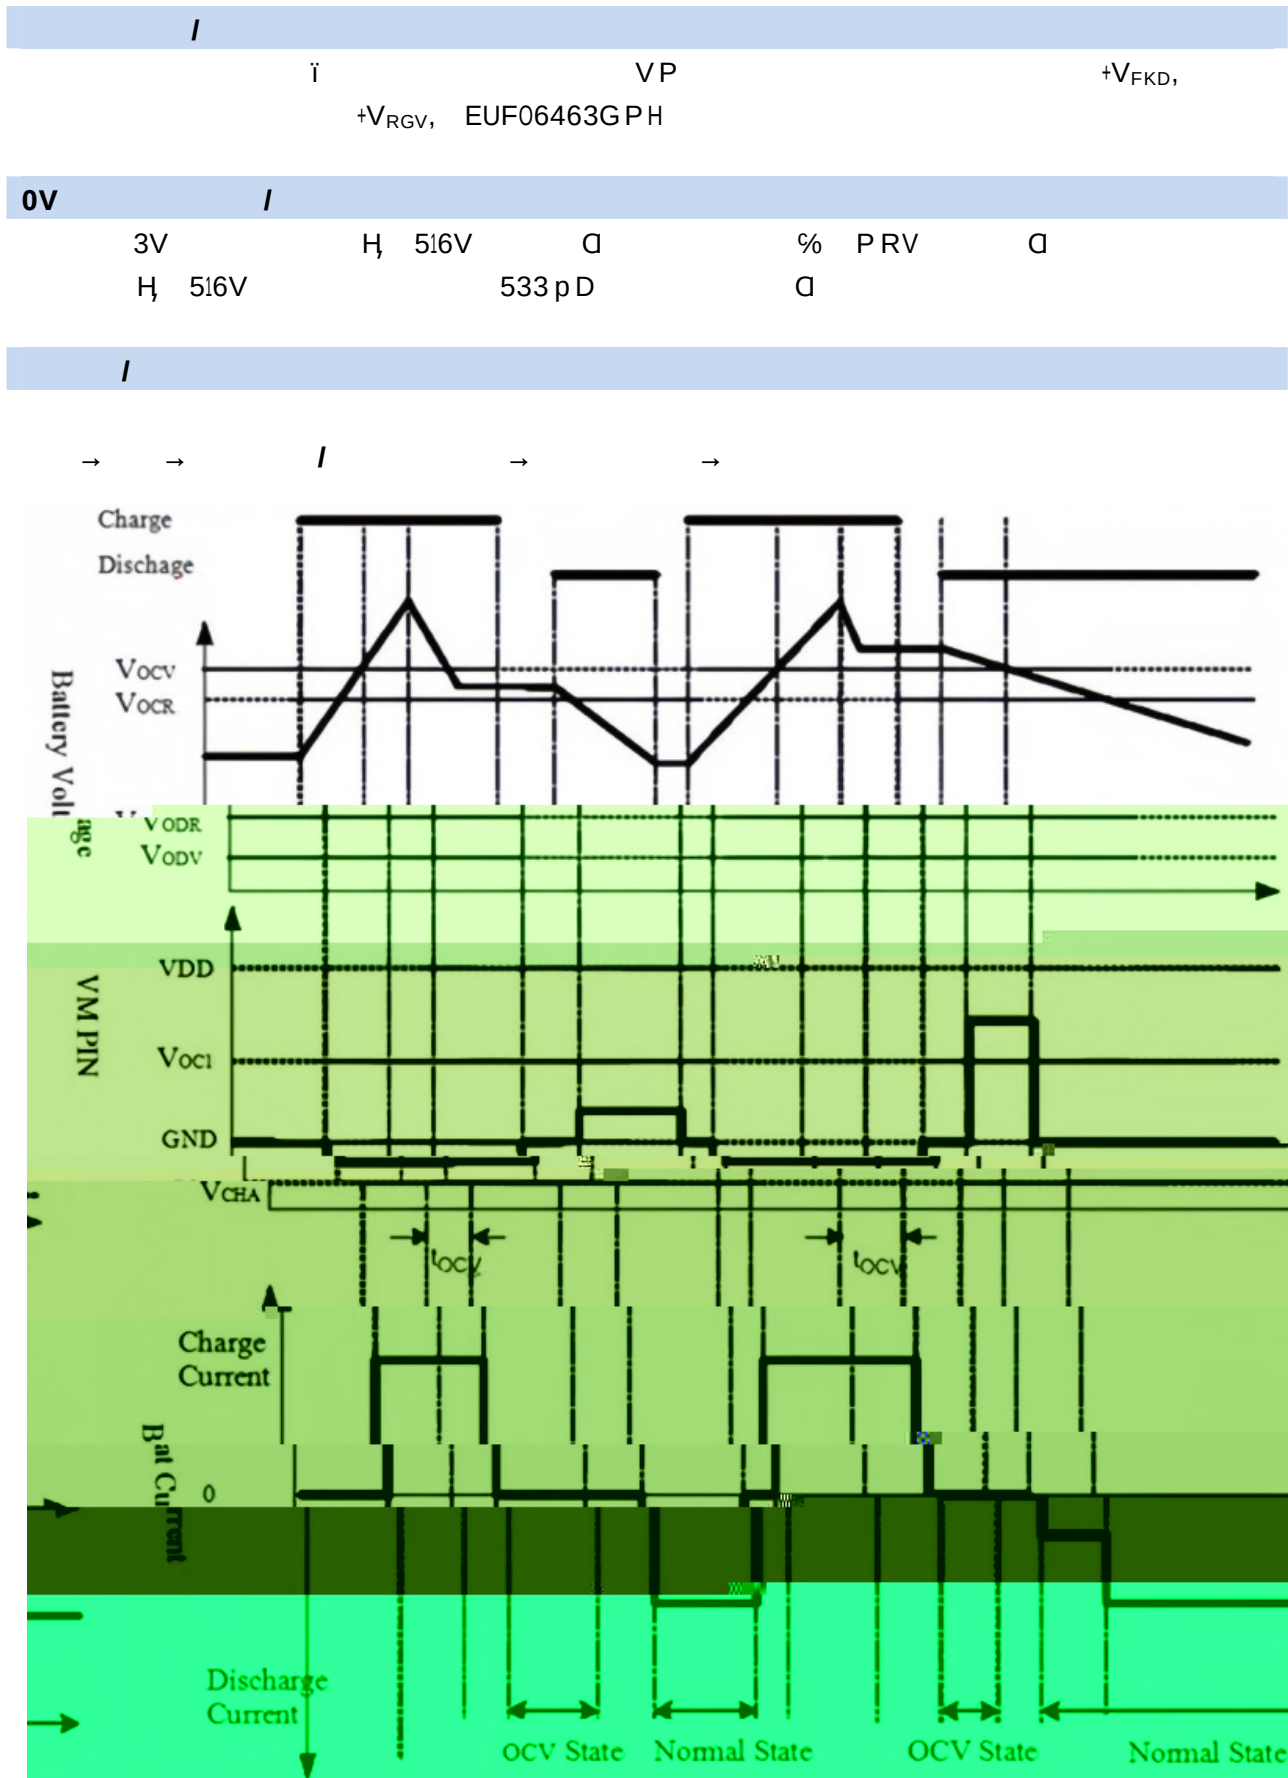



/

→ → / → →

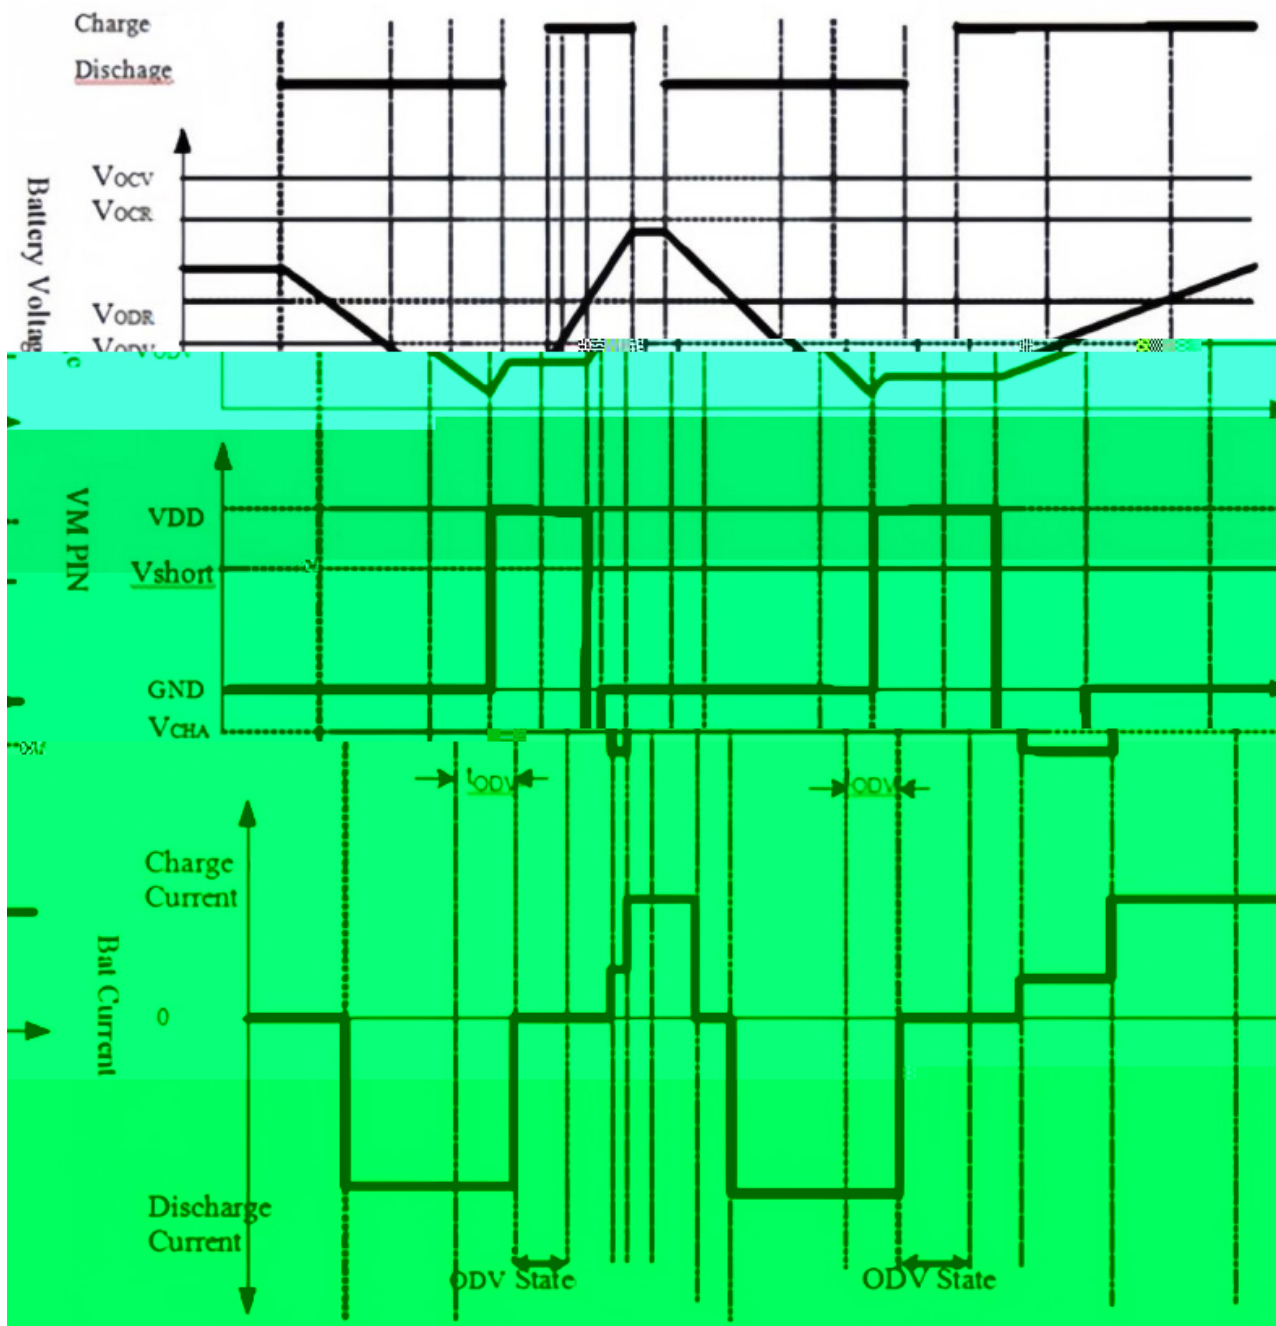

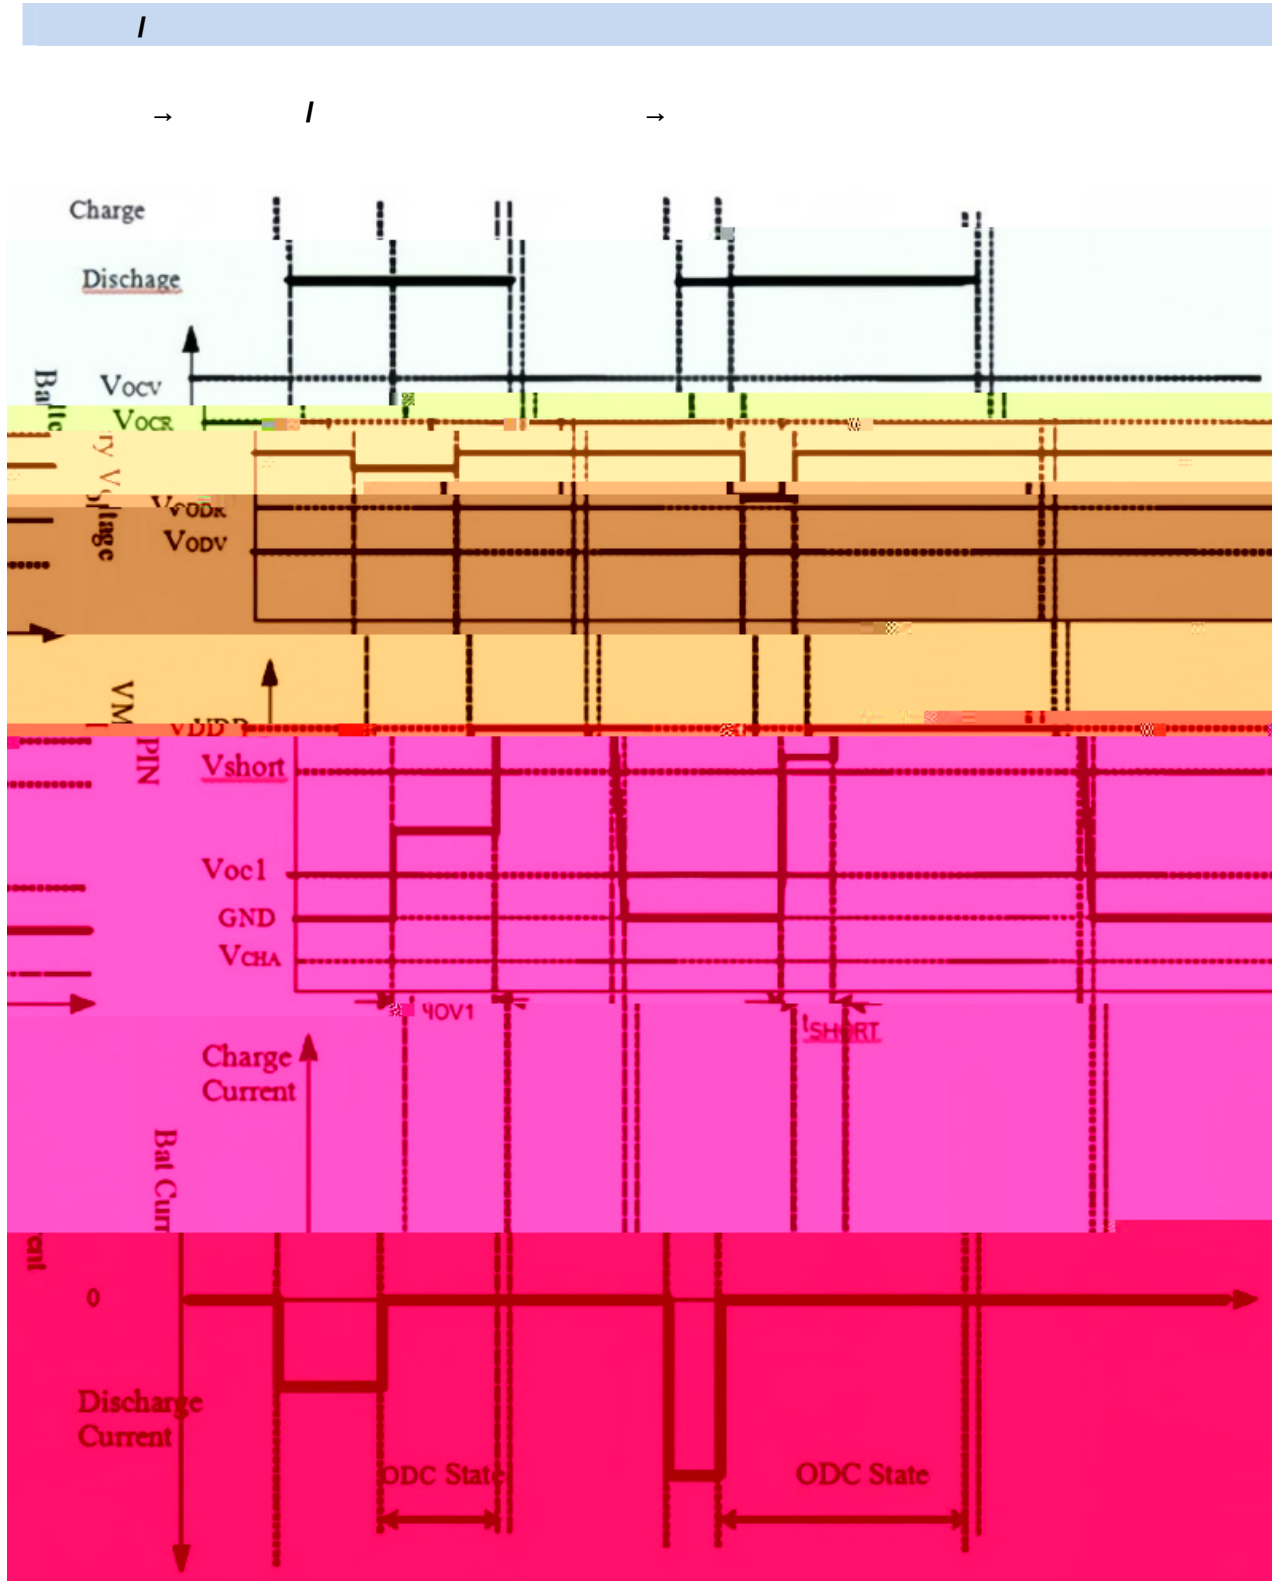

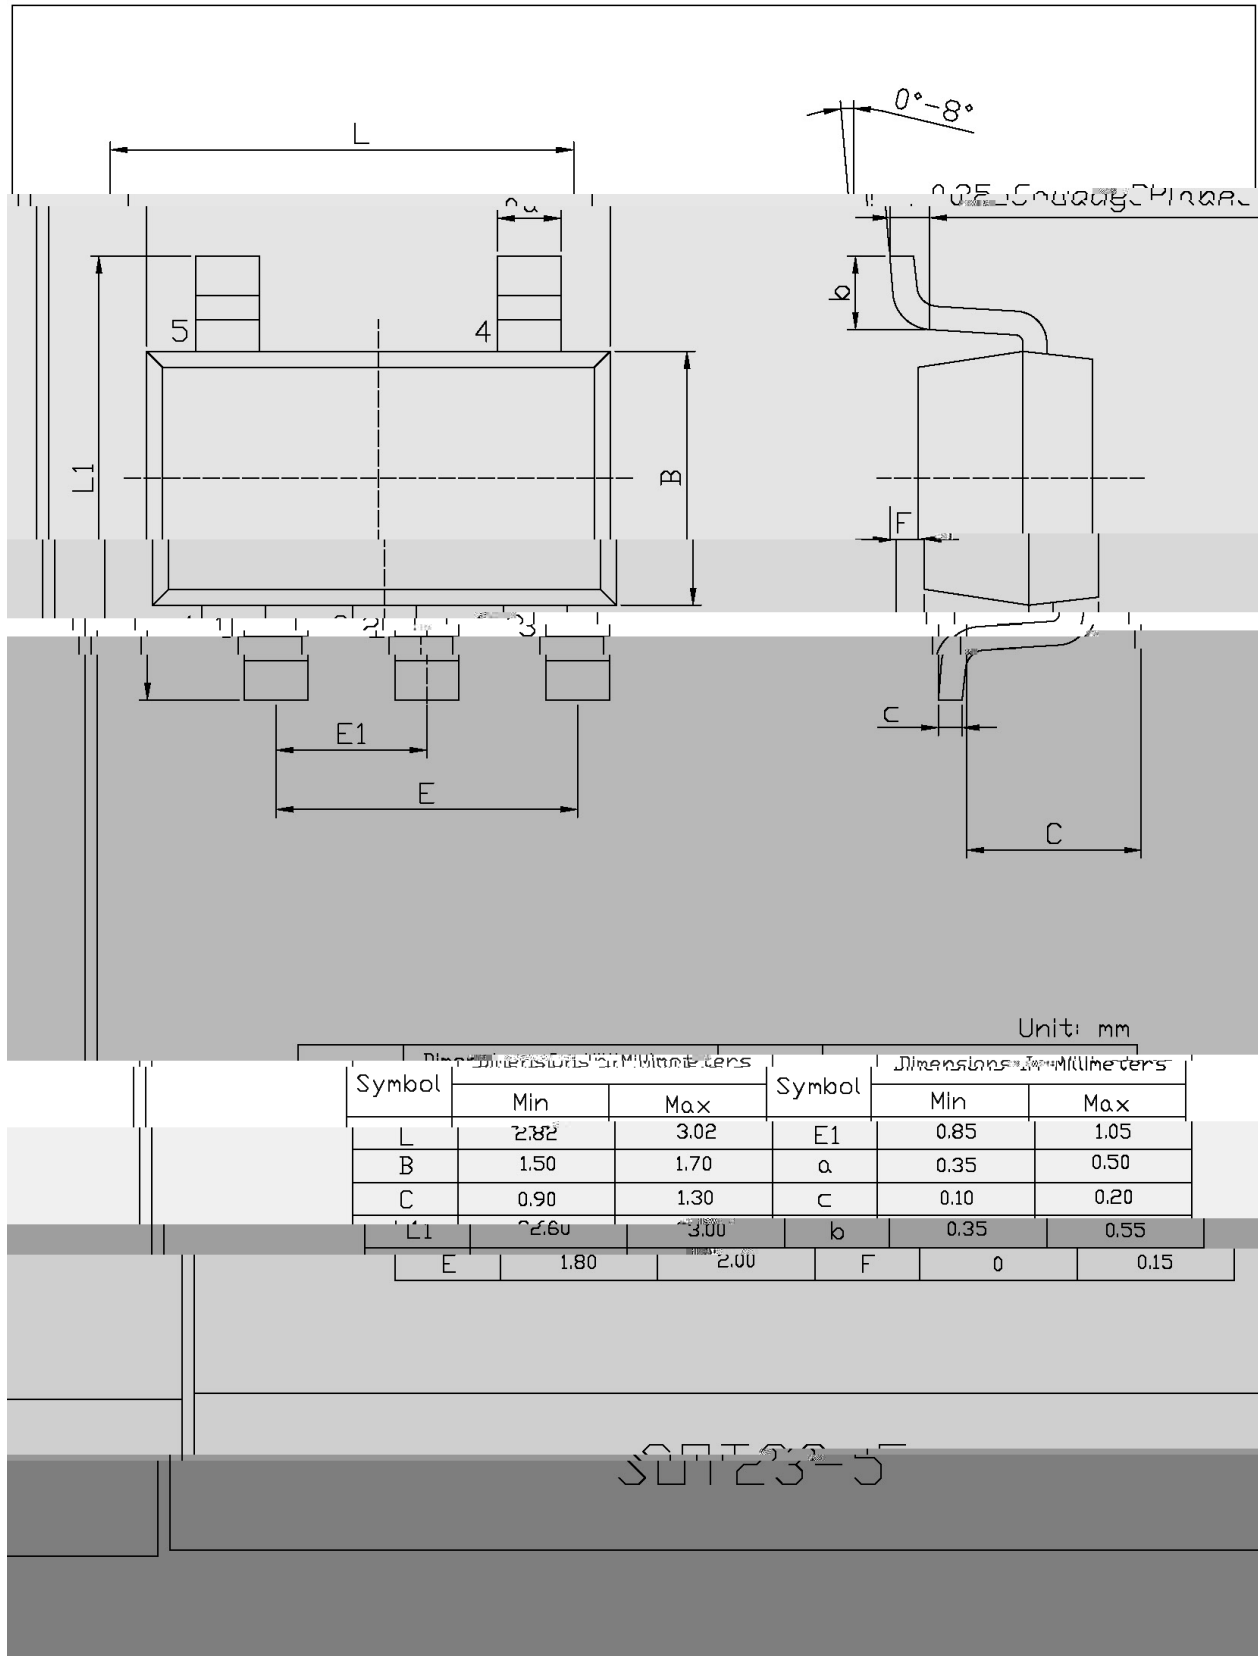

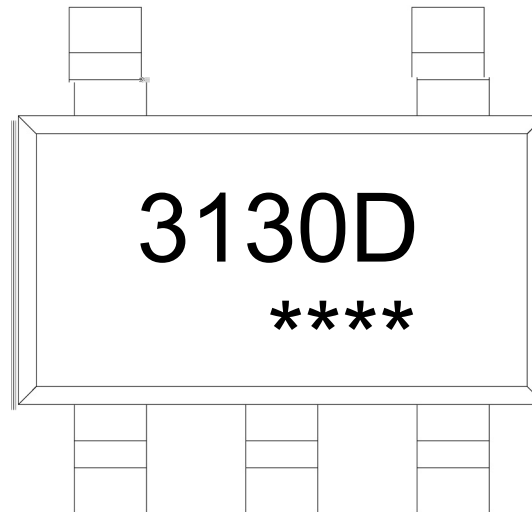


X
6463G X
---- X

Note:

3130D: Product Type Code

****: Lot No. Code, code change with Lot No.

Temperature Profile for IR Reflow Soldering(Pb-Free)

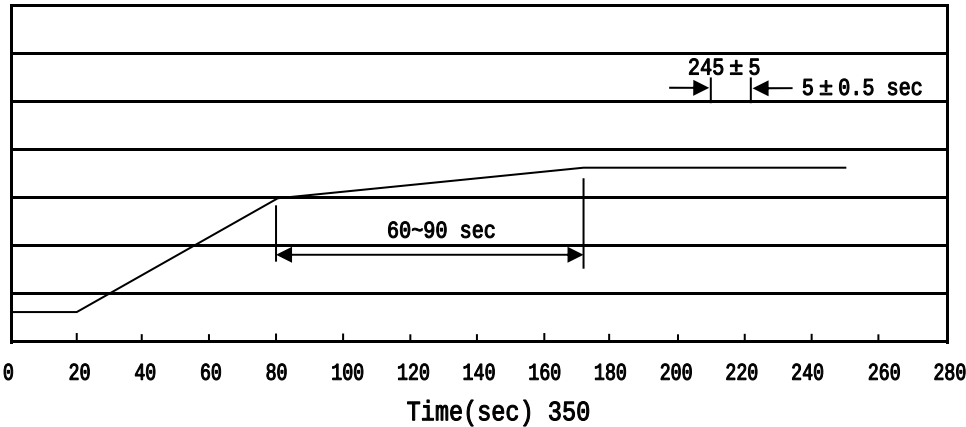

- Note:
- 1.Preheating:150~180 , Time:60~90sec.
 - 2.Peak Temp.:245±5 , Duration:5±0.5sec.
 3. Cooling Speed: 2~10 /sec.

χ 260±5 χ 10±1 sec. 50 Temp.:260±5 Time:10±1 sec

/ REEL

Package Type	Units					Dimension (unit mm ³)		
	Units/Reel	Reels/Inner Box	Units/Inner Box	Inner Boxes/Outer Box	Units/Outer Box	Reel	Inner Box	Outer Box
SOT23-5/6	3,000	10	30,000	4	120,000	7 ×8	210×205×205	445×435×230

Temperature()