

/ Descriptions


/ Features

-
-
-
-
-
-
-
-
-
-
-
-
-
-


/ Applications

-
-
-
-

/ Application Circuit

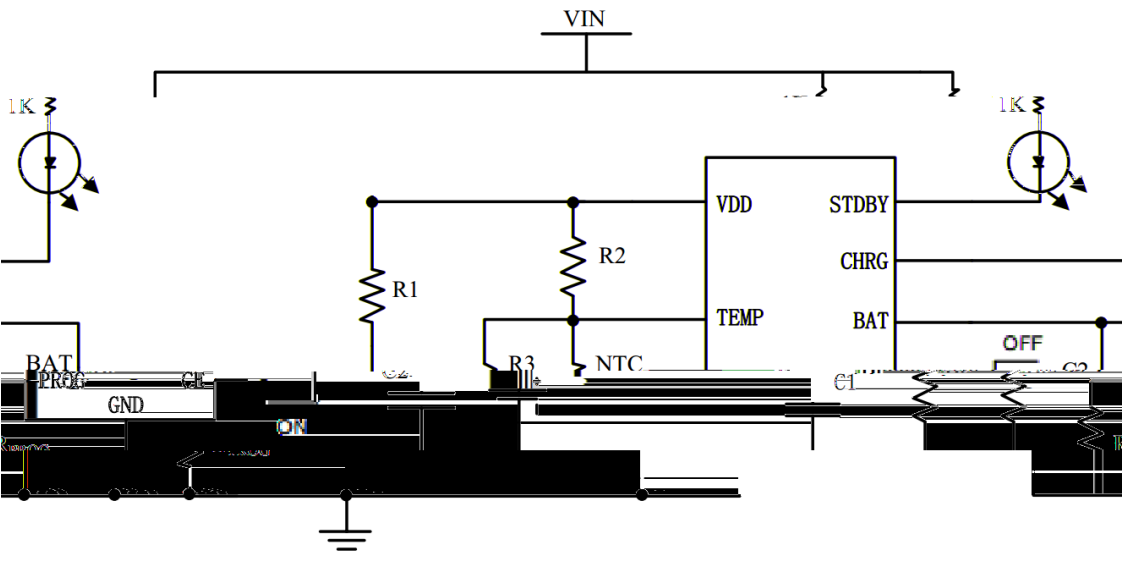

/ Pinning

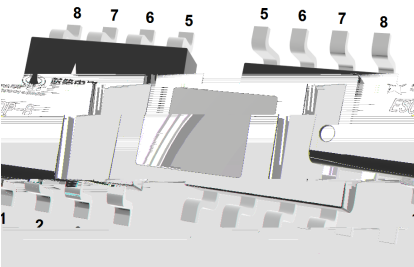

PIN Num.	Symbol	Function

/ Absolute Maximum Ratings(Ta=25)

PARAMETER	SYMBOL	RATINGS	UNITS

/ Electrical Characteristics(Ta=25)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Power Suplly						
						μ
						μ
						μ
Charging Current Setting						
Battery Terminal BAT						
						Ω

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Indicator Pin Status CHRG/STDBY						
Internal Temperature Compensation						

/ Function description

•

•

•


Ω	

•


/ Function description

-
-
-
-

/ Package Dimensions

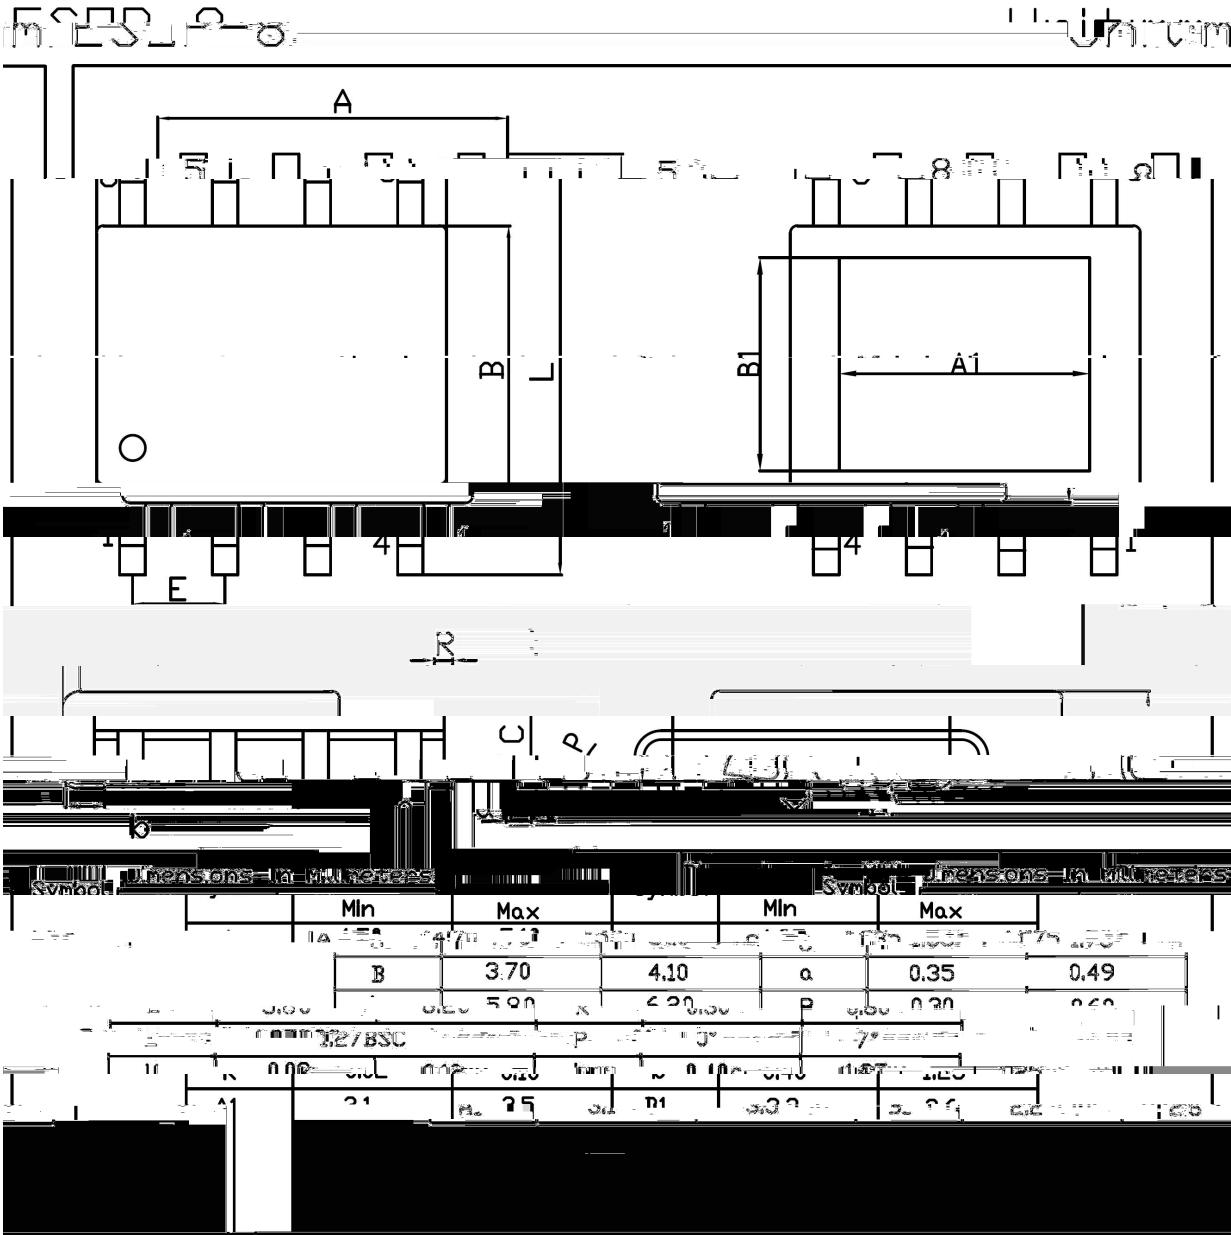

/ Marking Instructions

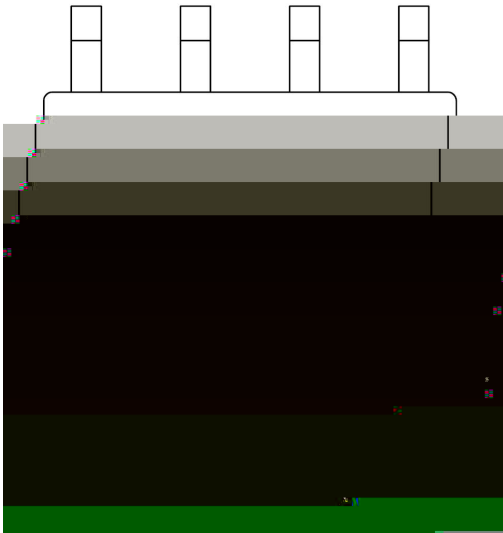

() / Whp shudwxuh Suriloh i ru LU Uhior z Vroghulqj+Se0luhh,
