

/ Descriptions


/ Features

- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆
- ◆


/ Applications

- ◆
- ◆
- ◆
- ◆

/ Application Circuit

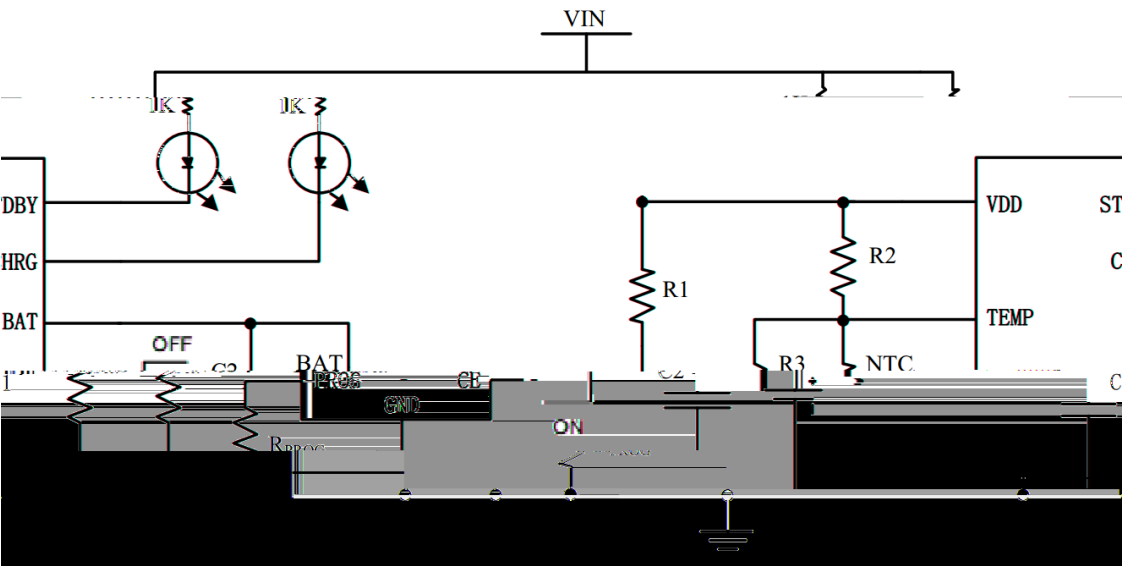

/ Pinning

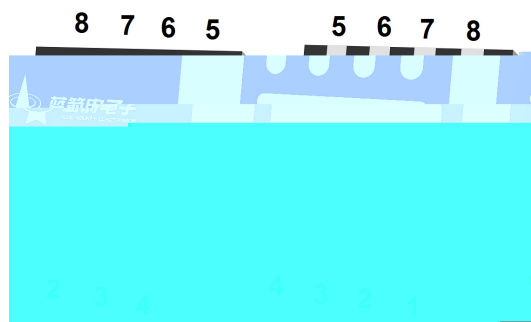

PIN Num.	Symbol	Function

/ Absolute Maximum Ratings(Ta=25℃)

PARAMETER	SYMBOL	RATINGS	UNITS

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Power Suplly						
						μ
						μ
						μ
Charging Current Setting						

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
Indicator Pin Status CHRG/STDBY						

BRCL4058NZR-4.2



DATA SHEET



/ Function description

◆


◆

◆

◆

/ Package Dimensions

Dimensions In Millimeterer			
Symbol	MIN	TYP	MAX
A	2.95	3.00	3.05
B	2.95	3.00	3.05
C	0.70	0.75	0.80
L	0.25	0.30	0.35
L2	—	0.65	—
L4	—	0.202	—

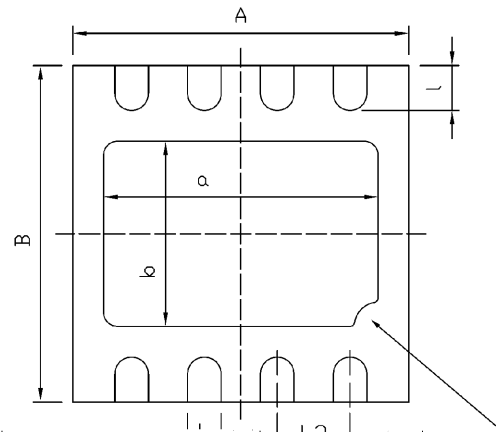

/ Marking Instructions

