

/ Descriptions

BRCO7350HME	CMOS		
300mA		30V	CMOS

/ Features

- ◆
 - ◆
 - ◆
 - ◆
 - ◆
 - ◆
 - ◆
 - ◆
- μ


$\pm$

$\pm$


/ Applications

- ◆
- ◆
- ◆

/ Typical Application

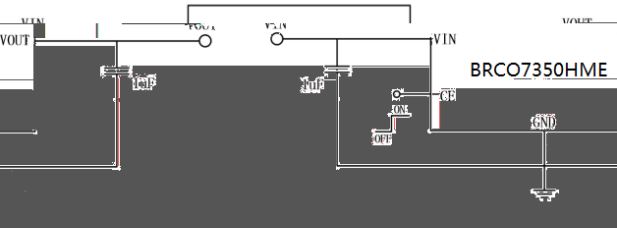


/ Pinning

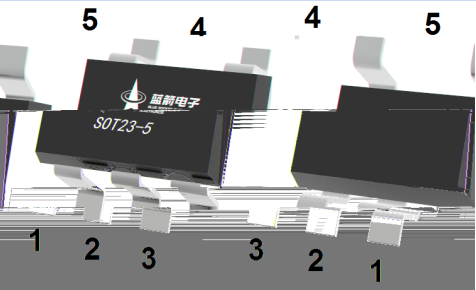


/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(TA=25 , VIN=VOUT+1V, CIN=COU=1uF, unless otherwise specified)


						V
						V
						uA
						uA
						mA
						mV
						mA
						V
						V
		<				Ω
	△	≤ ≤				mV
	△	≤ ≤				%/V
	△ △	℃≤ ≤ ℃		±		ppm/
						dB
	△					

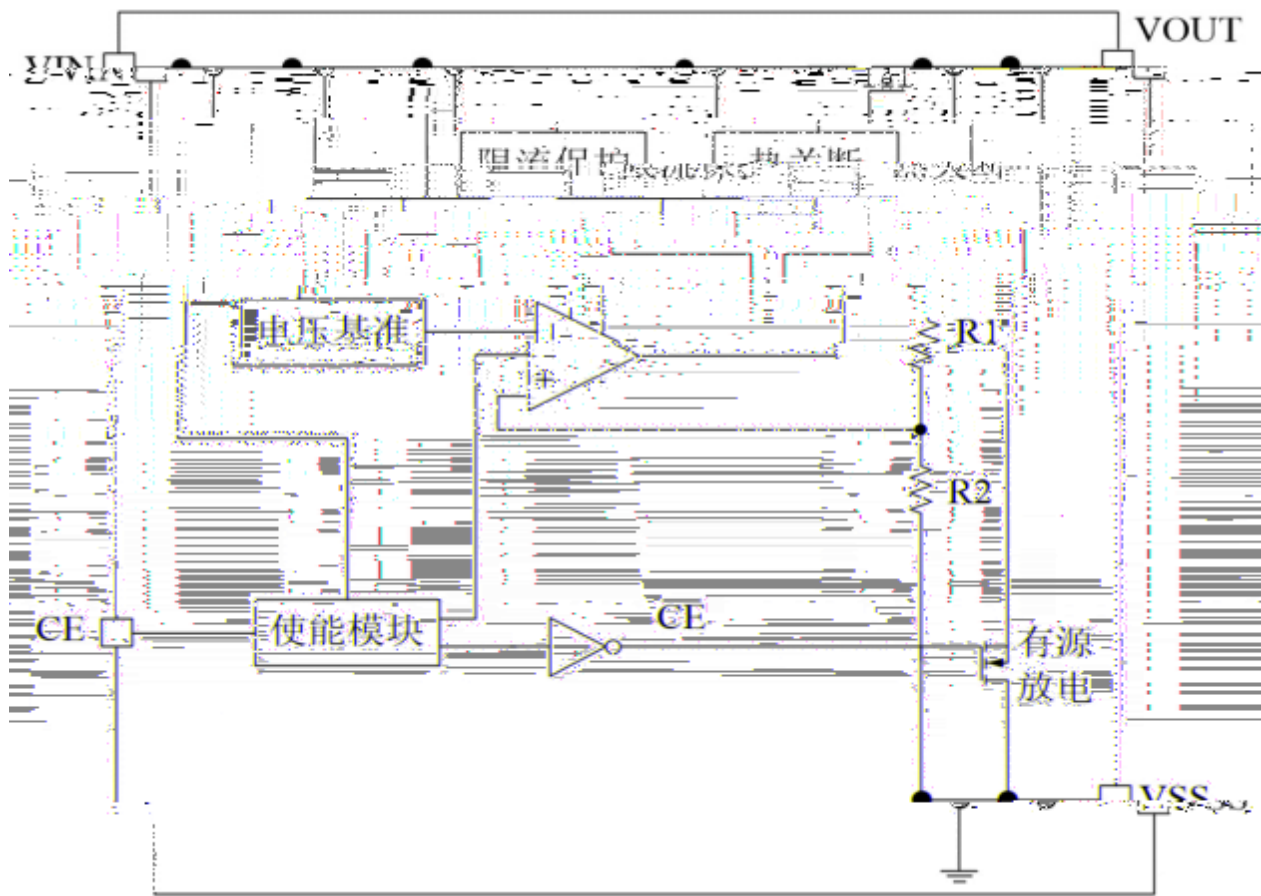

/ Package Dimensions

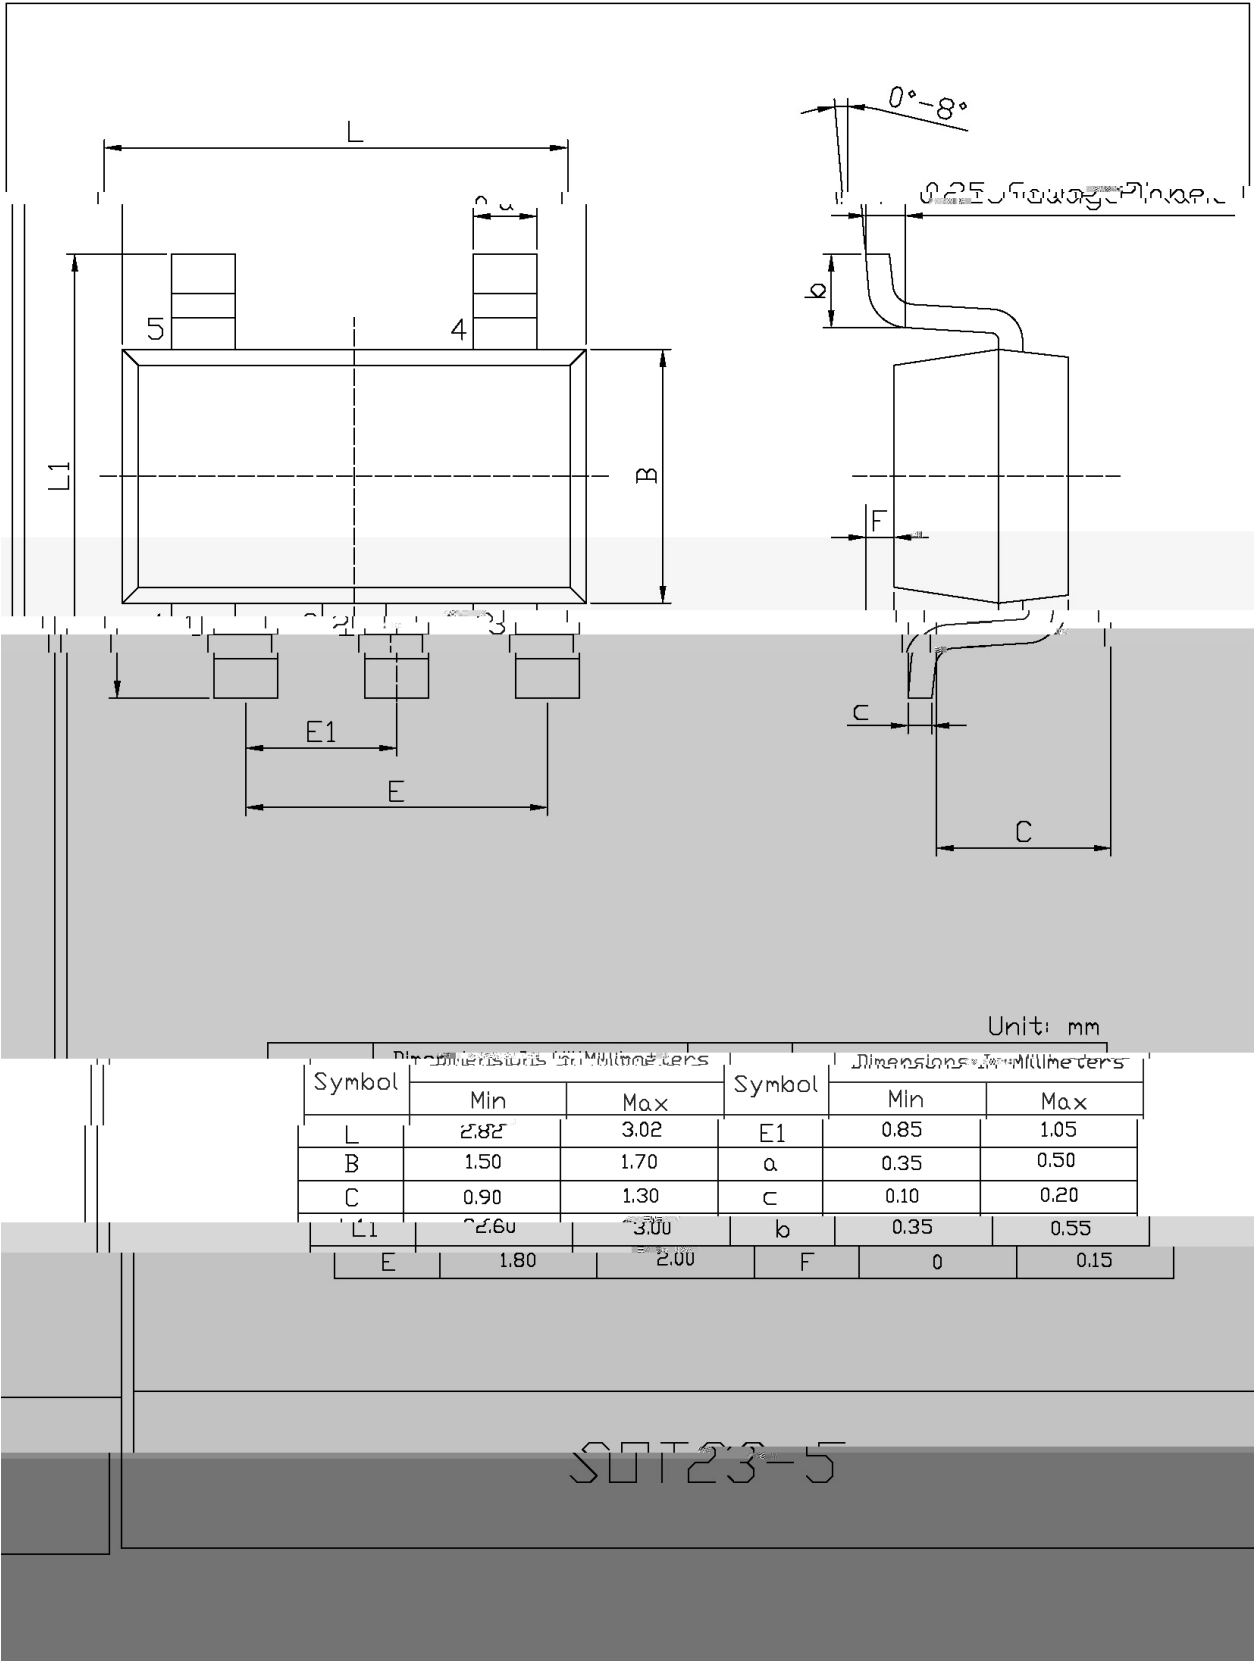


/ Marking Instructions

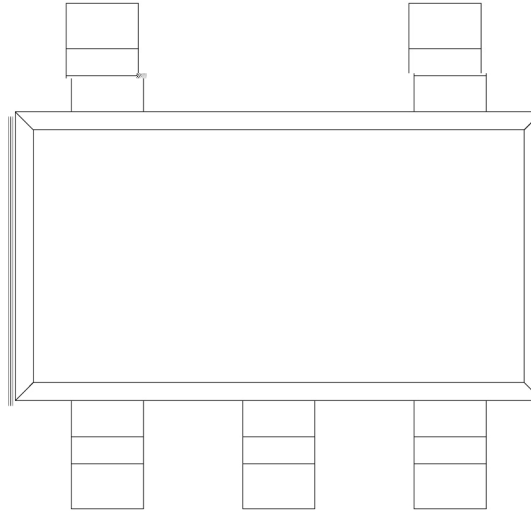

7350H

() /

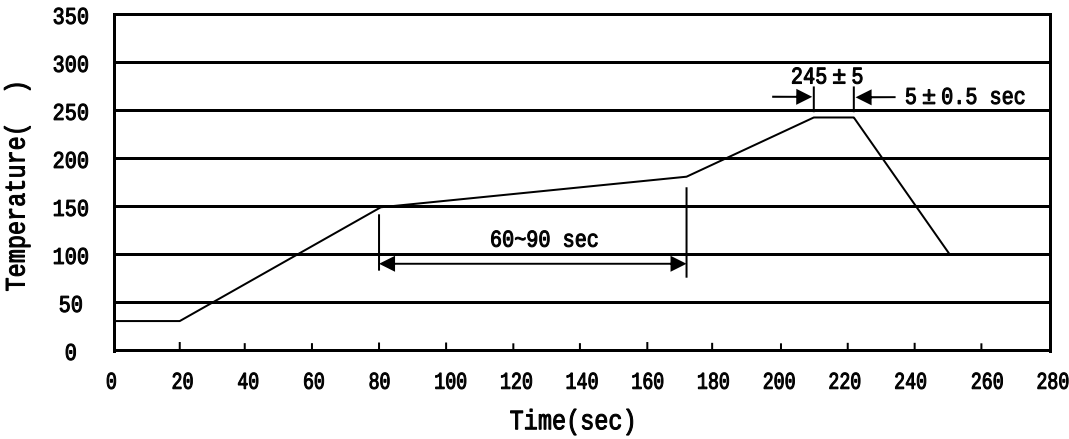

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
						"		

/ Notices