

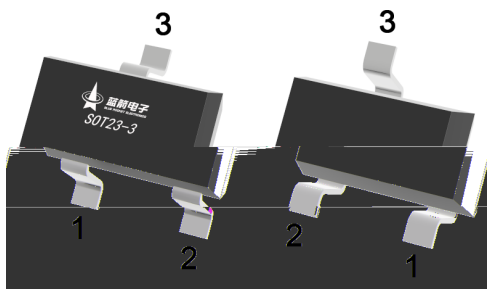


SOT23-3



24V1.5μA±2%


μ:±2%

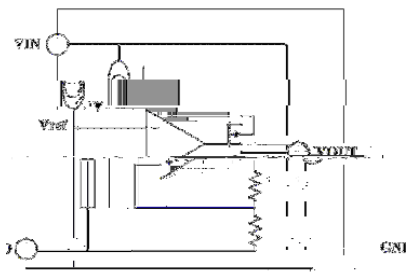


|  |  |  |  |  |  |
|--|--|--|--|--|--|
|  |  |  |  |  |  |
|  |  |  |  |  |  |
|  |  |  |  |  |  |




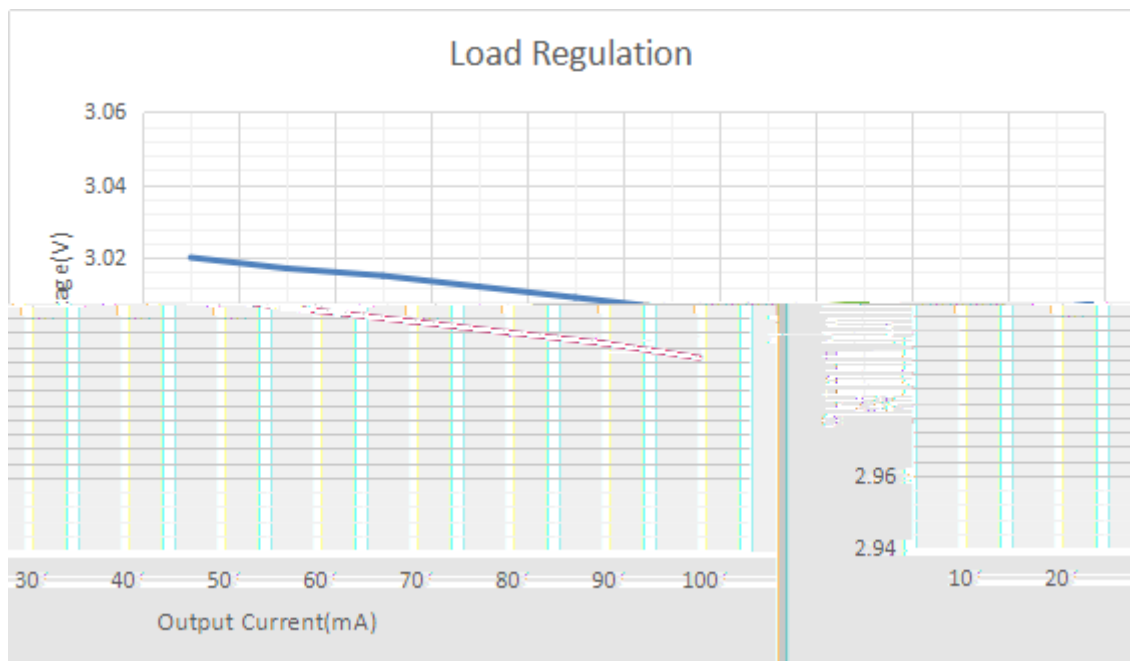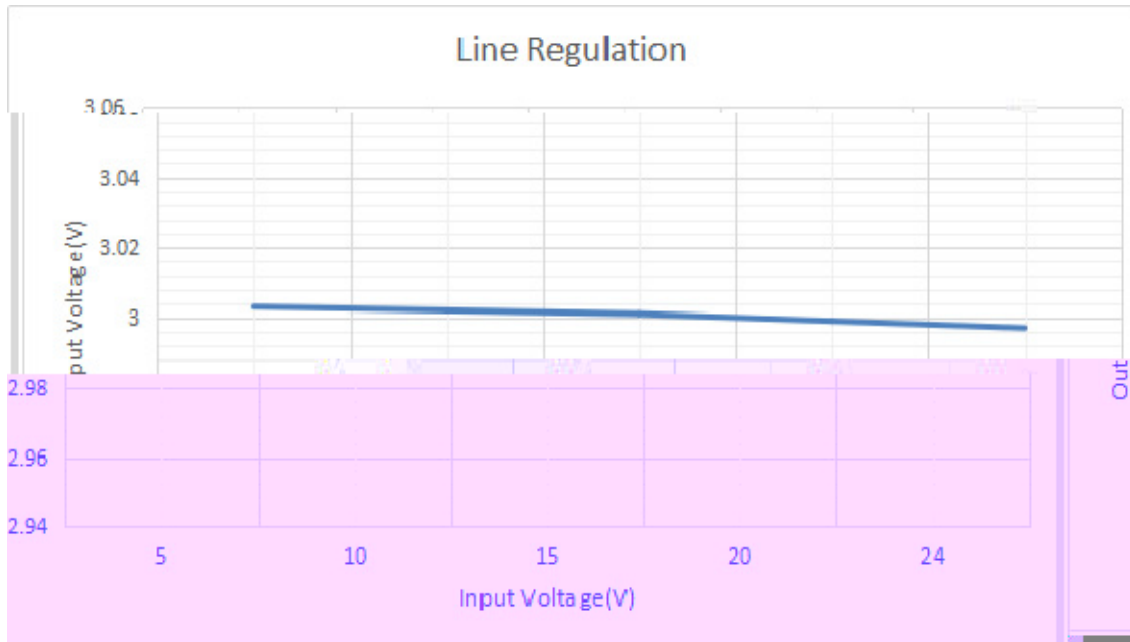

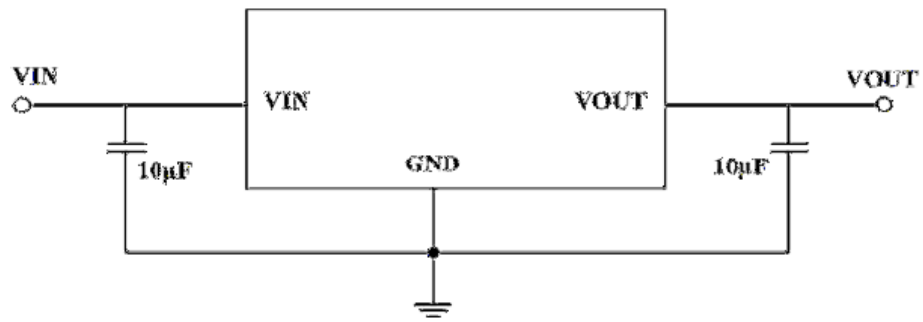

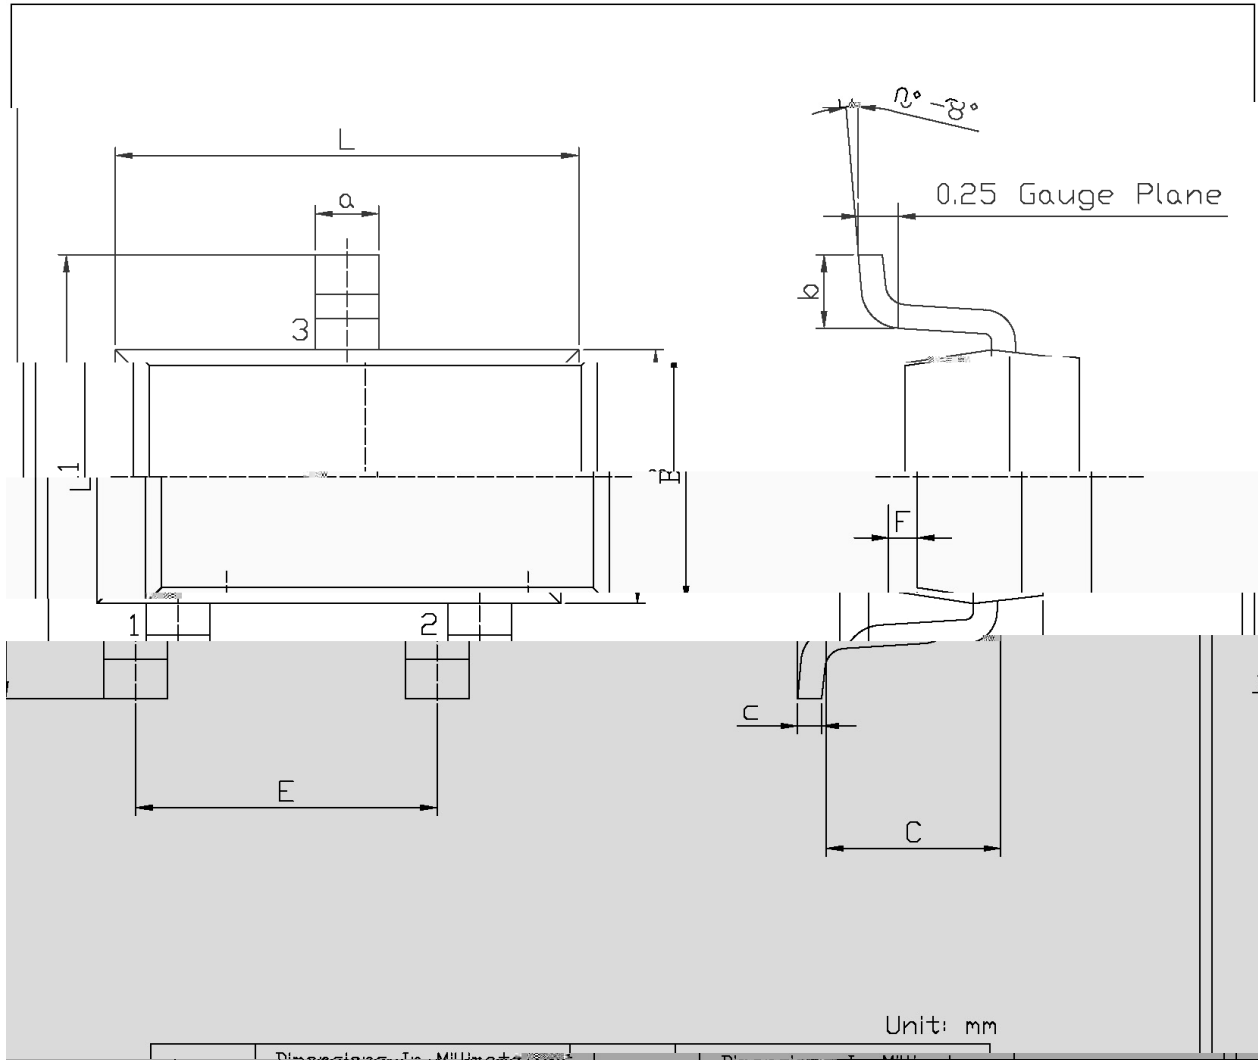


| Dimension in Millimeters |      | Dimension in Millimeters |      |
|--------------------------|------|--------------------------|------|
| 2.00                     | 2.00 | 2.00                     | 2.00 |

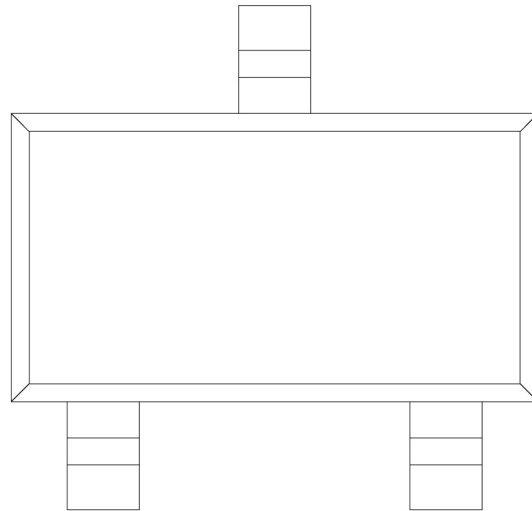

\*\*\*\*

Temperature Profile for IR Reflow Soldering(Pb-Free)

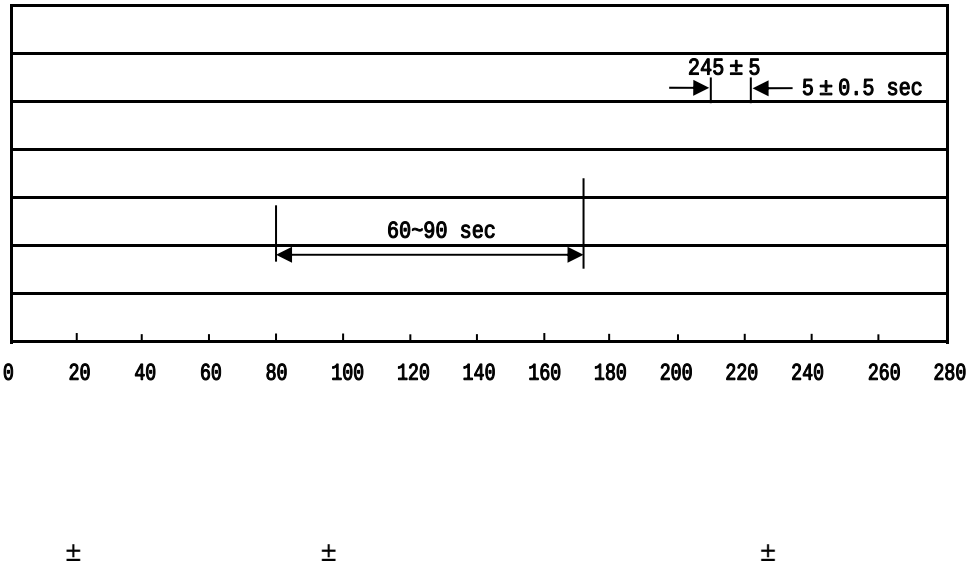

± ±

|  | Units/Reel<br>/ | Reels/Inner Box<br>/ | Units/Inner Box<br>/ | Inner Boxes/Outer Box<br>/ | Units/Outer Box<br>/ | Reel | Inner Box | Outer Box |
|--|-----------------|----------------------|----------------------|----------------------------|----------------------|------|-----------|-----------|
|  |                 |                      |                      |                            |                      |      |           |           |