

/ Descriptions


VOW0;<

/ Features


±

/ Applications

/ Equivalent Circuit

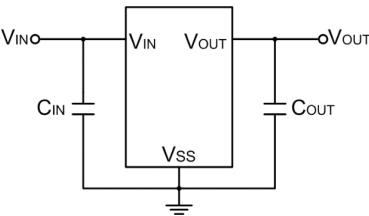

/ Pinning

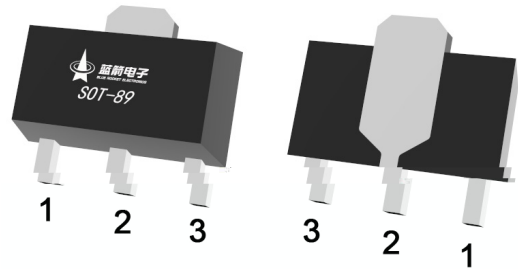

/ Marking

/ Absolute Maximum Ratings(Ta=25 )






|  |  |  |  |
|--|--|--|--|
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |
|  |  |  |  |

/ Electrical Characteristics( TA=25 , VIN=VOUT+2V, CIN=COUT=1uF, unless otherwise specified)




|  |  |     |  |  |  |  |
|--|--|-----|--|--|--|--|
|  |  |     |  |  |  |  |
|  |  |     |  |  |  |  |
|  |  |     |  |  |  |  |
|  |  |     |  |  |  |  |
|  |  |     |  |  |  |  |
|  |  | ≤ ≤ |  |  |  |  |
|  |  | ≤ ≤ |  |  |  |  |
|  |  | ≤ ≤ |  |  |  |  |
|  |  |     |  |  |  |  |
|  |  |     |  |  |  |  |






/ Electrical Characteristic Curve

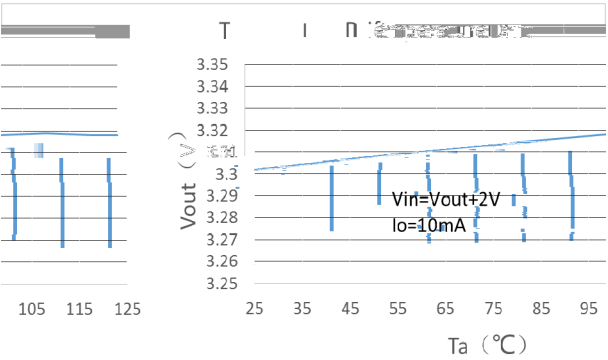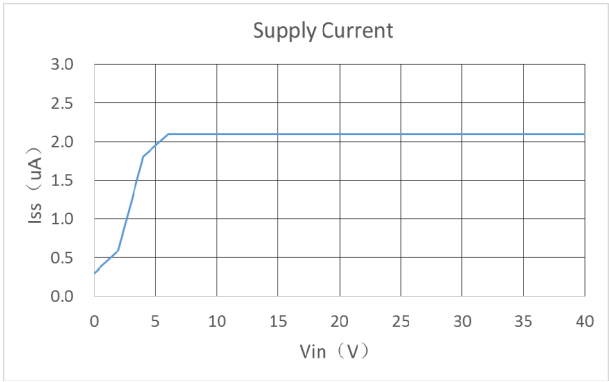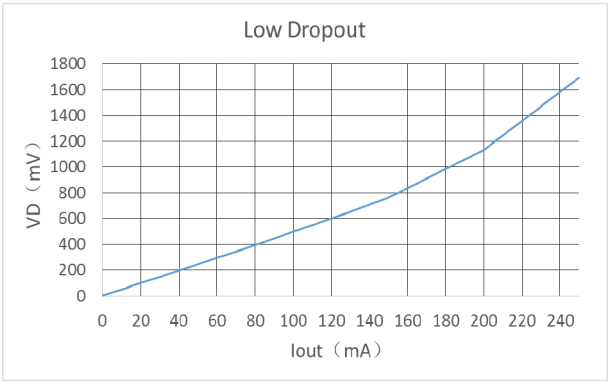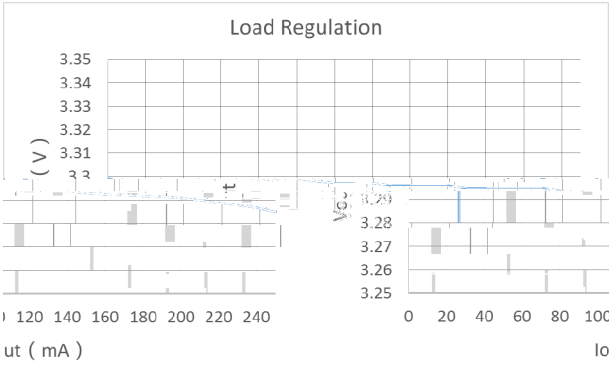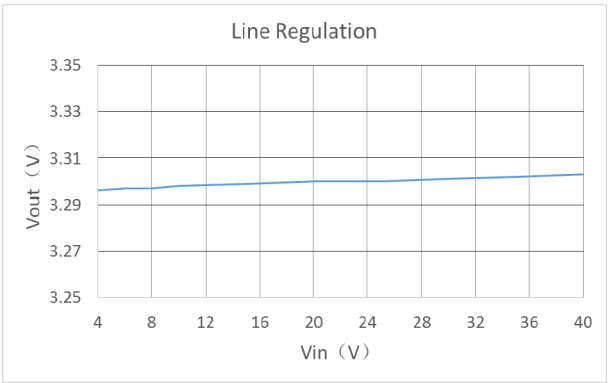

## / Typical Application Circuit

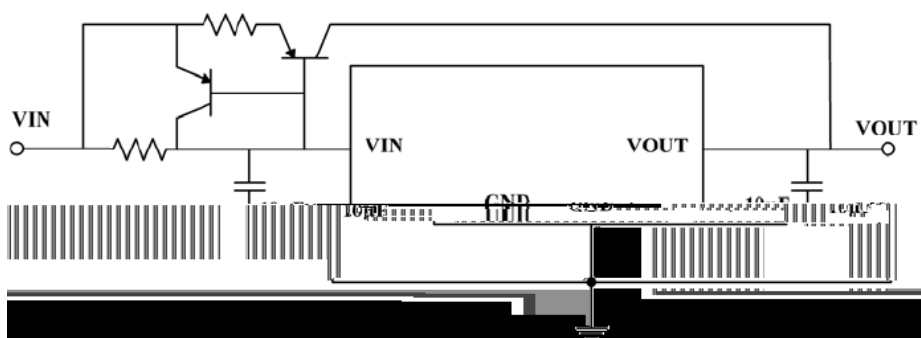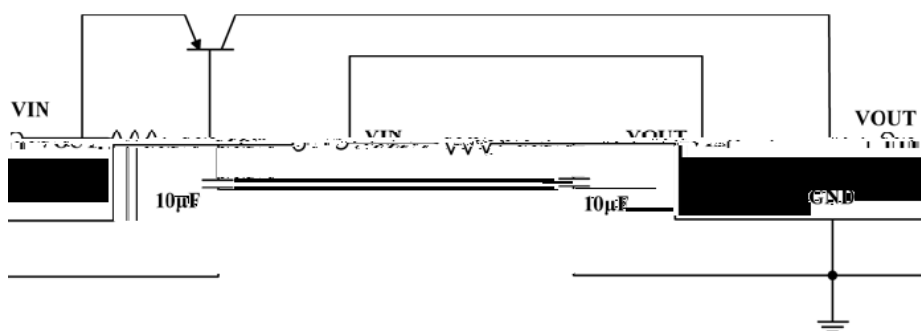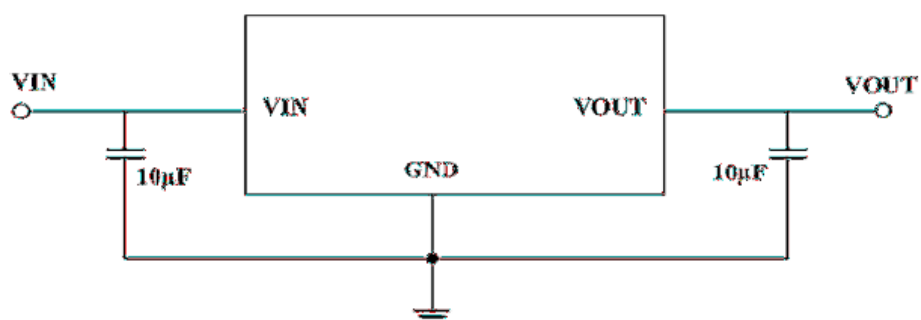


/ Typical Application Circuit

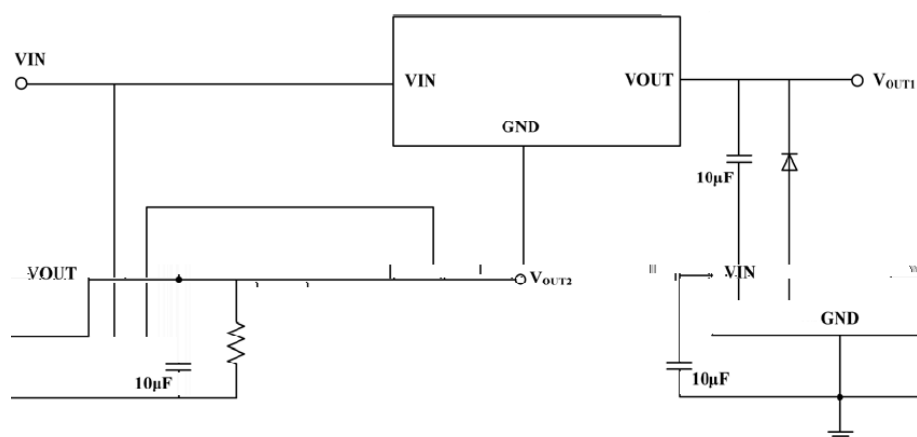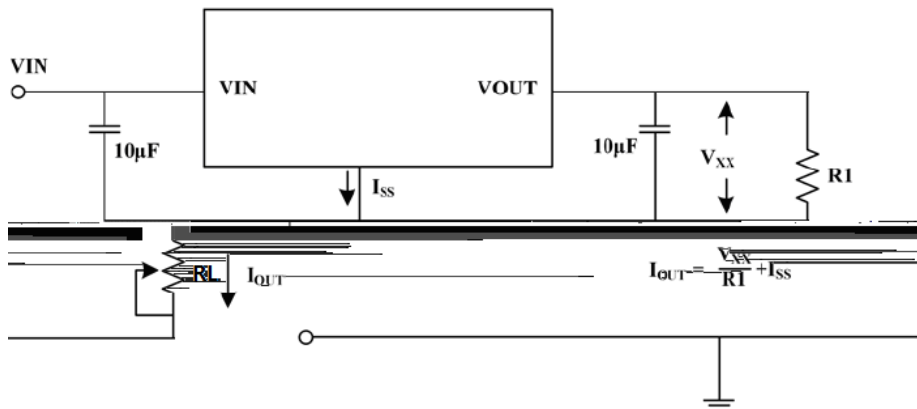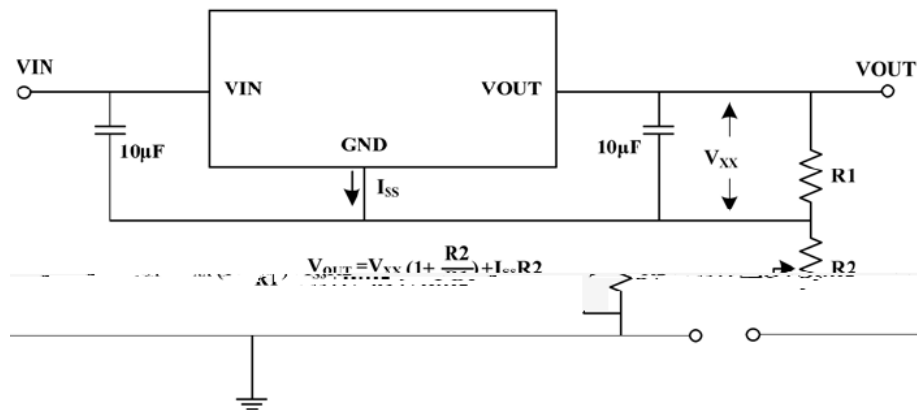




/ Marking Instructions

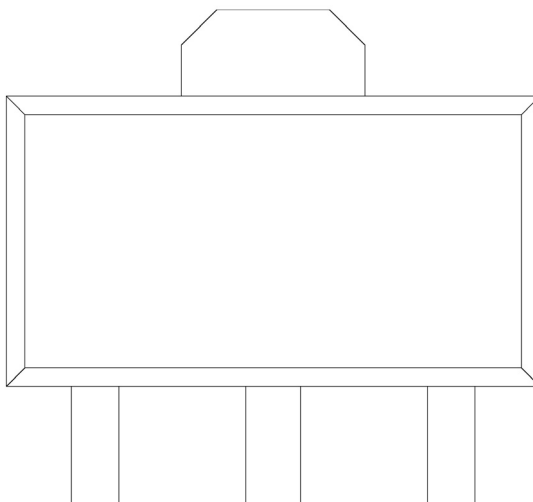

:

(   ) /

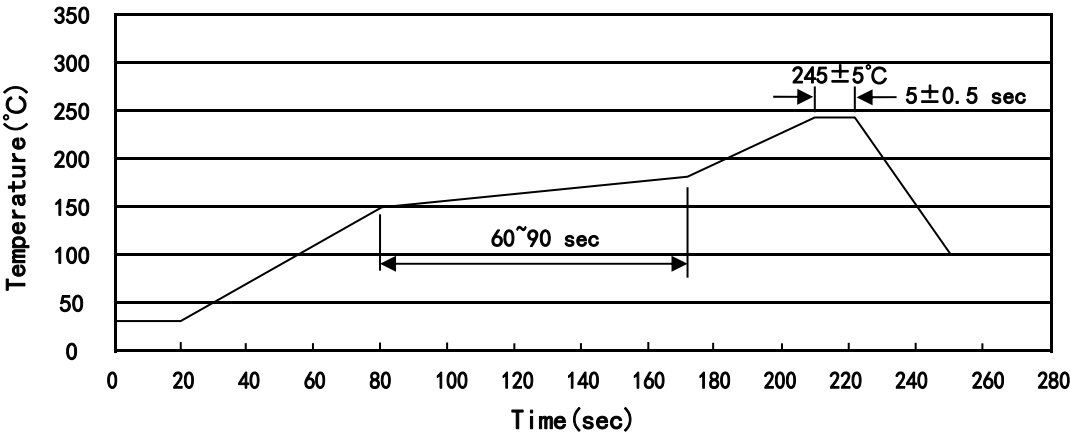

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

| 封装形式 | 包装数量 |      |     |     |     | 包装尺寸 |   |   |
|------|------|------|-----|-----|-----|------|---|---|
|      | 只 卷盘 | 卷盘 盒 | 只 盒 | 盒 箱 | 只 箱 |      | 盒 | 箱 |
|      |      |      |     |     |     |      |   |   |

/ Notices