

BRC07550MMC

SOT23-3



24V

1.5μA

±2%




μ

:±2%


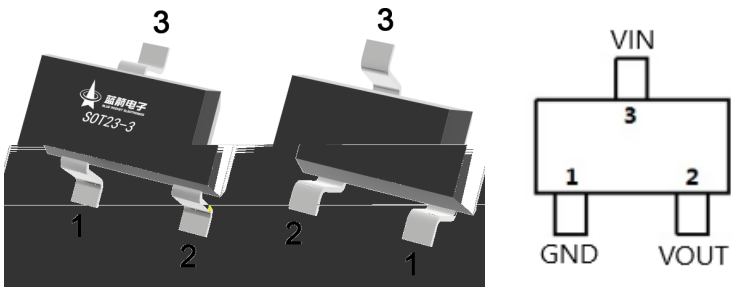
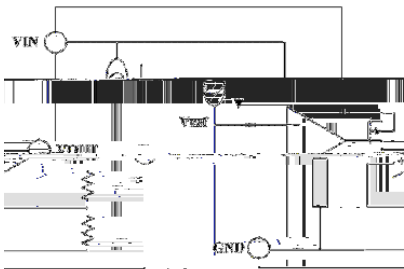


/ Marking


/ Typical Application Circuit

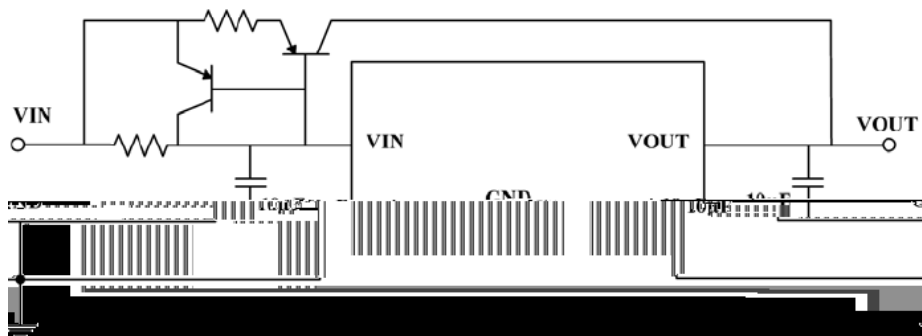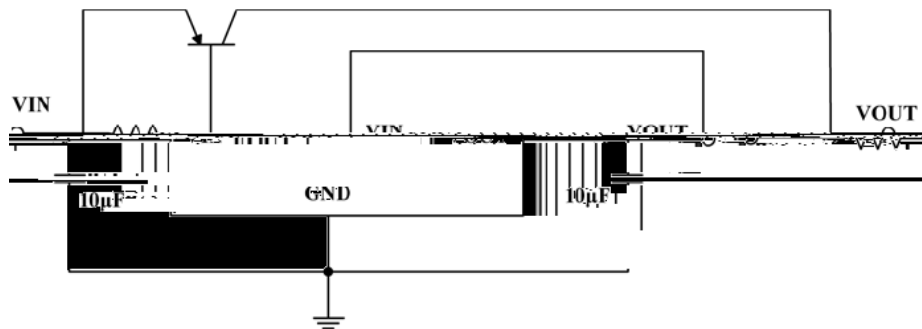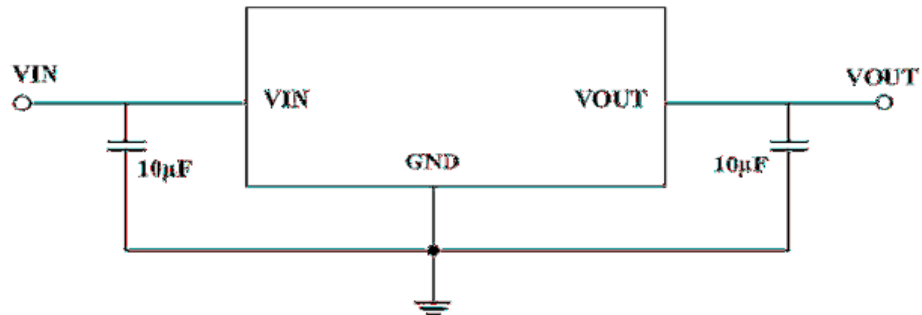

/ Typical Application Circuit

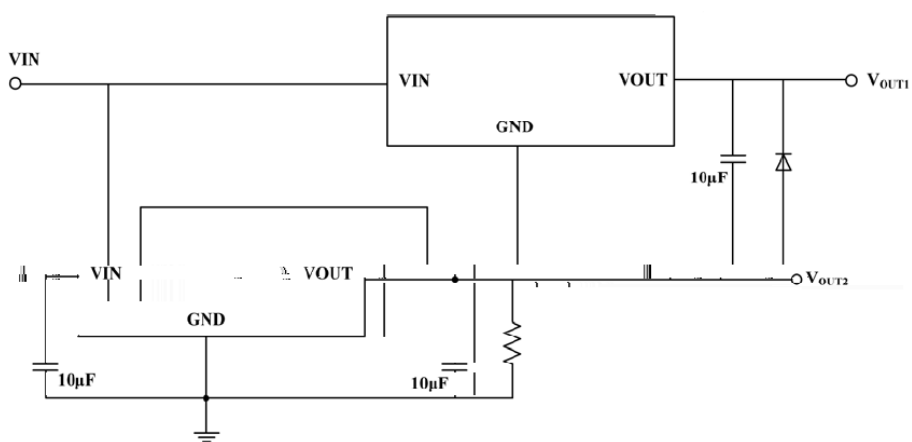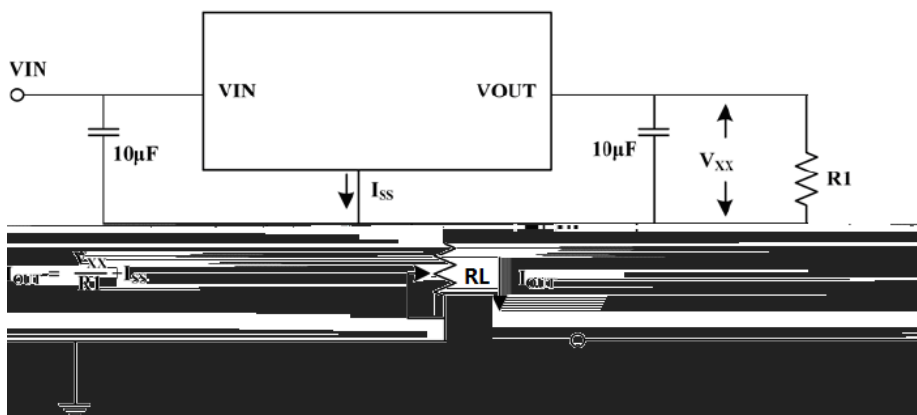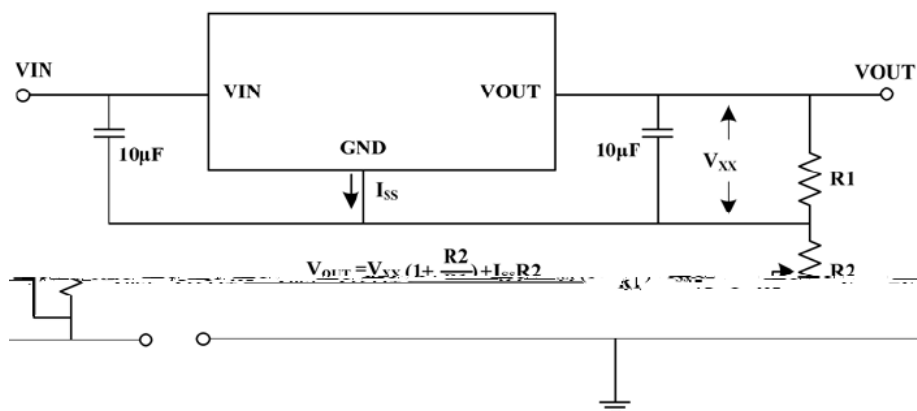


/ Package Dimensions

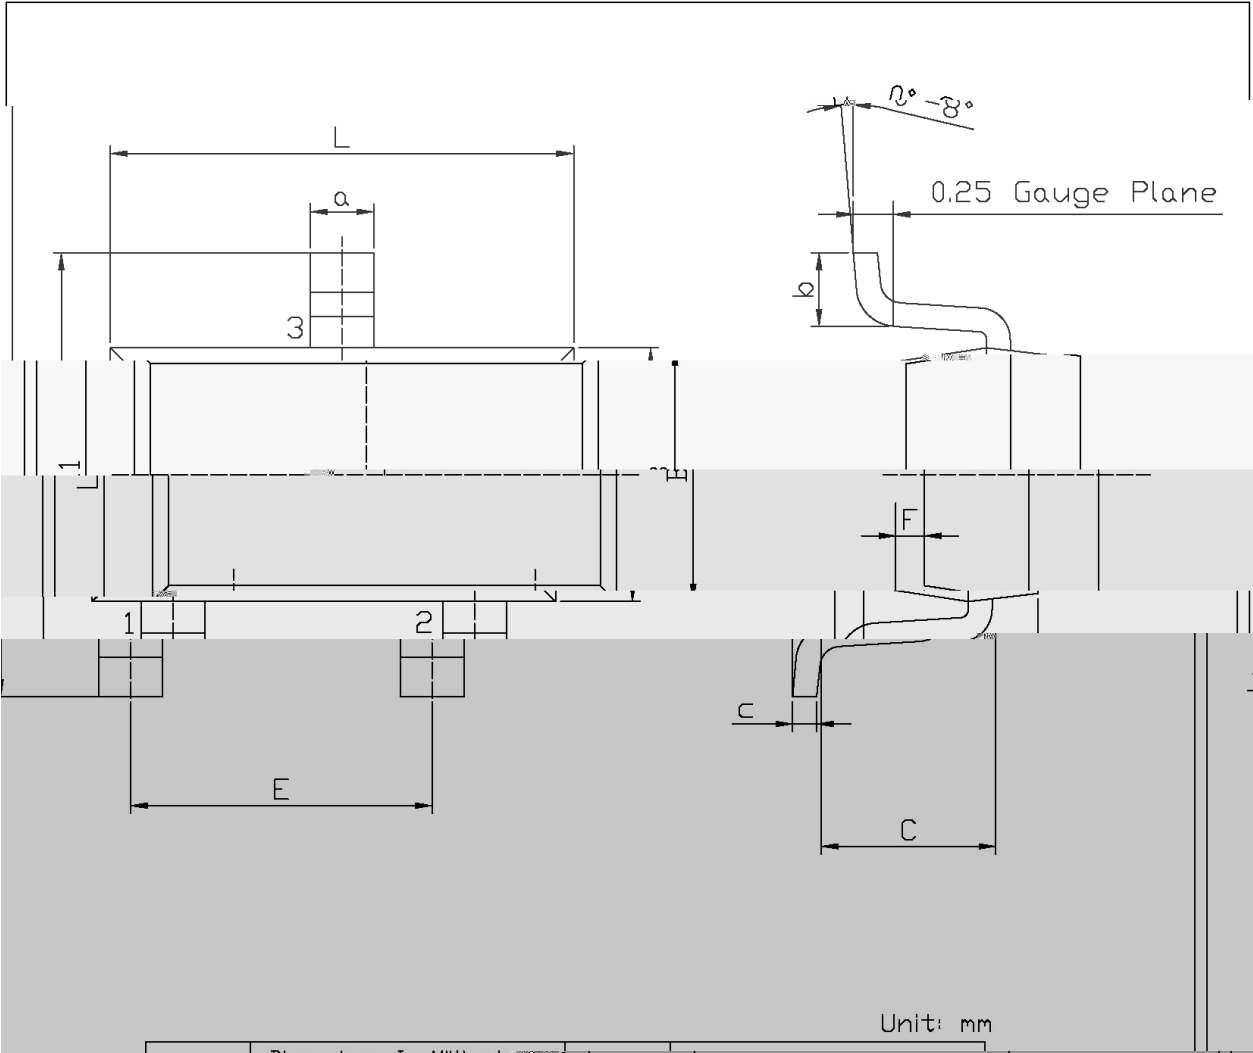


Dimension in Millimeters		Dimension in Inches	
1	2.54	2	5.08
2	2.54	3	7.62
3	2.54	4	10.16
4	2.54	5	12.70
5	2.54	6	15.24
6	2.54	7	17.78
7	2.54	8	20.32
8	2.54	9	22.86
9	2.54	10	25.40
10	2.54	11	27.94
11	2.54	12	30.48
12	2.54	13	33.02
13	2.54	14	35.56
14	2.54	15	38.10
15	2.54	16	40.64
16	2.54	17	43.18
17	2.54	18	45.72
18	2.54	19	48.26
19	2.54	20	50.80
20	2.54	21	53.34
21	2.54	22	55.88
22	2.54	23	58.42
23	2.54	24	60.96
24	2.54	25	63.50
25	2.54	26	66.04
26	2.54	27	68.58
27	2.54	28	71.12
28	2.54	29	73.66
29	2.54	30	76.20
30	2.54	31	78.74
31	2.54	32	81.28
32	2.54	33	83.82
33	2.54	34	86.36
34	2.54	35	88.90
35	2.54	36	91.44
36	2.54	37	93.98
37	2.54	38	96.52
38	2.54	39	99.06
39	2.54	40	101.60
40	2.54	41	104.14
41	2.54	42	106.68
42	2.54	43	109.22
43	2.54	44	111.76
44	2.54	45	114.30
45	2.54	46	116.84
46	2.54	47	119.38
47	2.54	48	121.92
48	2.54	49	124.46
49	2.54	50	127.00
50	2.54	51	129.54
51	2.54	52	132.08
52	2.54	53	134.62
53	2.54	54	137.16
54	2.54	55	139.70
55	2.54	56	142.24
56	2.54	57	144.78
57	2.54	58	147.32
58	2.54	59	149.86
59	2.54	60	152.40
60	2.54	61	154.94
61	2.54	62	157.48
62	2.54	63	160.02
63	2.54	64	162.56
64	2.54	65	165.10
65	2.54	66	167.64
66	2.54	67	170.18
67	2.54	68	172.72
68	2.54	69	175.26
69	2.54	70	177.80
70	2.54	71	180.34
71	2.54	72	182.88
72	2.54	73	185.42
73	2.54	74	187.96
74	2.54	75	190.50
75	2.54	76	193.04
76	2.54	77	195.58
77	2.54	78	198.12
78	2.54	79	200.66
79	2.54	80	203.20
80	2.54	81	205.74
81	2.54	82	208.28
82	2.54	83	210.82
83	2.54	84	213.36
84	2.54	85	215.90
85	2.54	86	218.44
86	2.54	87	220.98
87	2.54	88	223.52
88	2.54	89	226.06
89	2.54	90	228.60
90	2.54	91	231.14
91	2.54	92	233.68
92	2.54	93	236.22
93	2.54	94	238.76
94	2.54	95	241.30
95	2.54	96	243.84
96	2.54	97	246.38
97	2.54	98	248.92
98	2.54	99	251.46
99	2.54	100	254.00

/ Marking Instructions

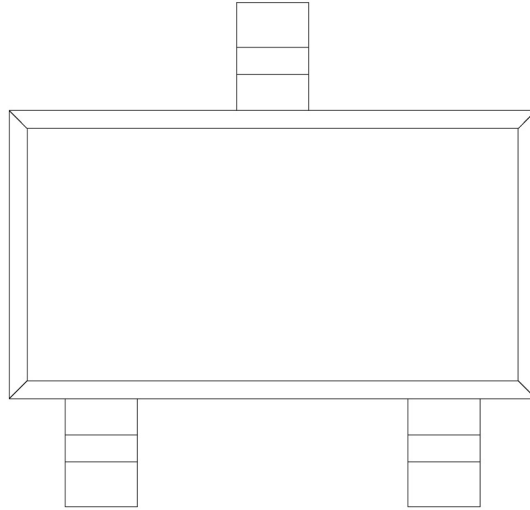

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

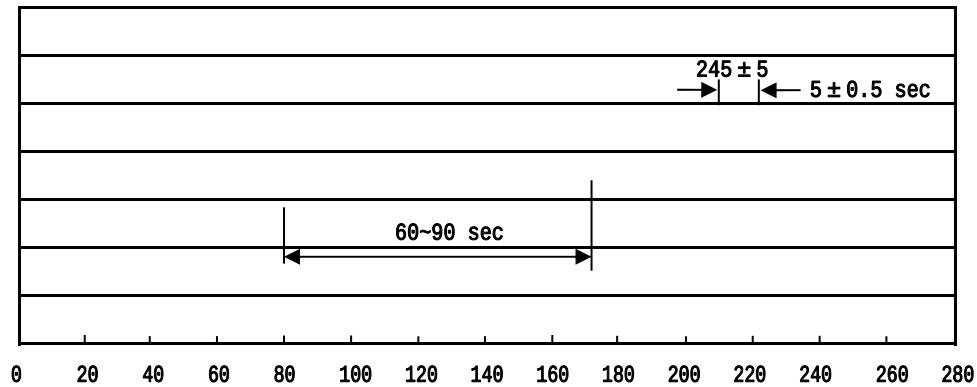 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices