


/ Descriptions

SOT-89


/ Features			
AEC-Q100	30V	2.5μA	±2%
	μ	±	

/ Applications

/ Equivalent Circuit

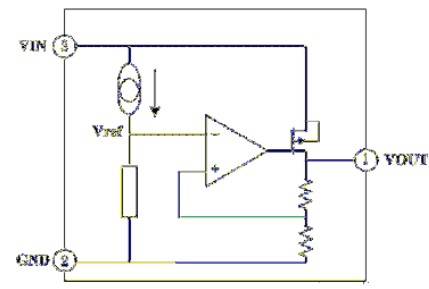

/ Pinning

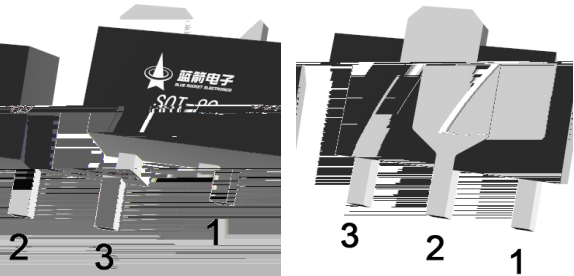

/ Marking

/




/ Absolute Maximum Ratings(Ta=25)

	θ		




/ Electrical Characteristics(Ta=25)

						μ




/ Electrical Characteristic Curve

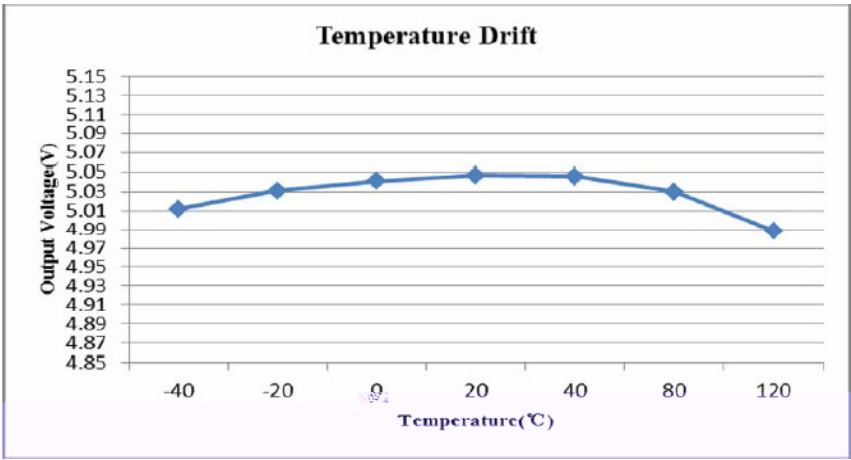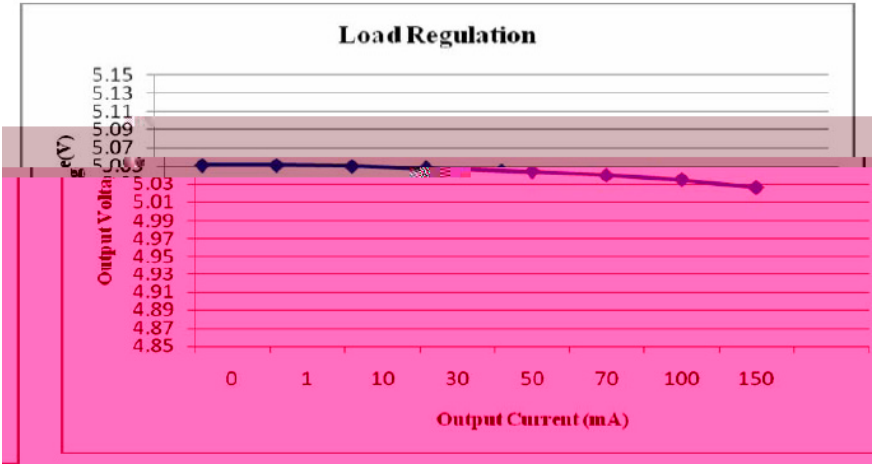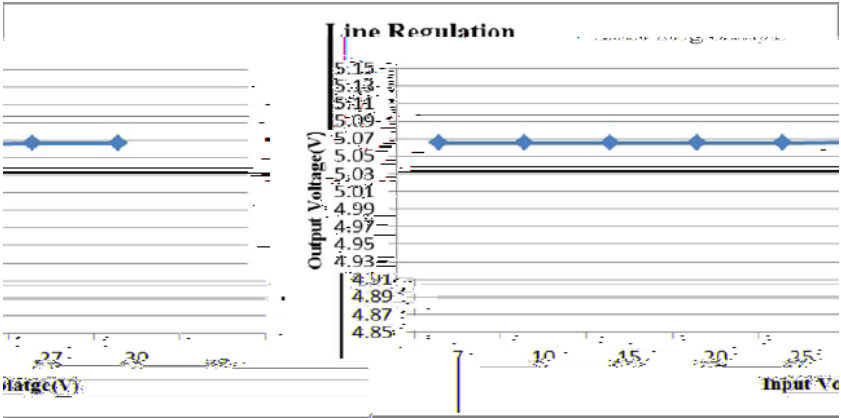

/ Typical Application Circuit

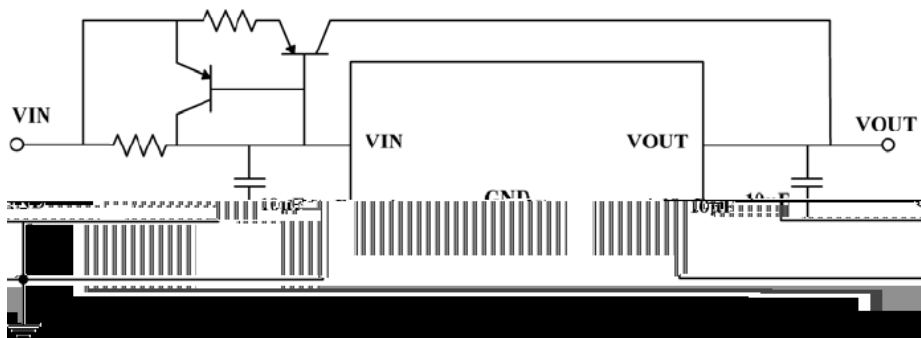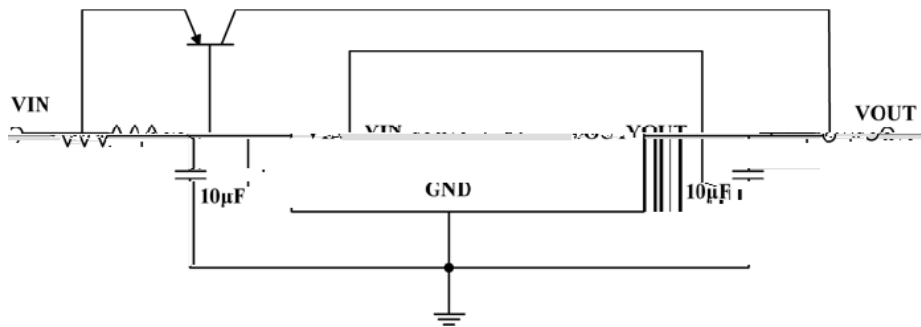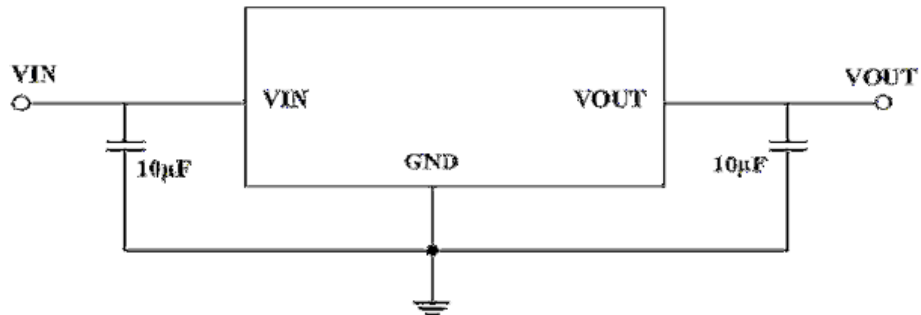


/ Typical Application Circuit

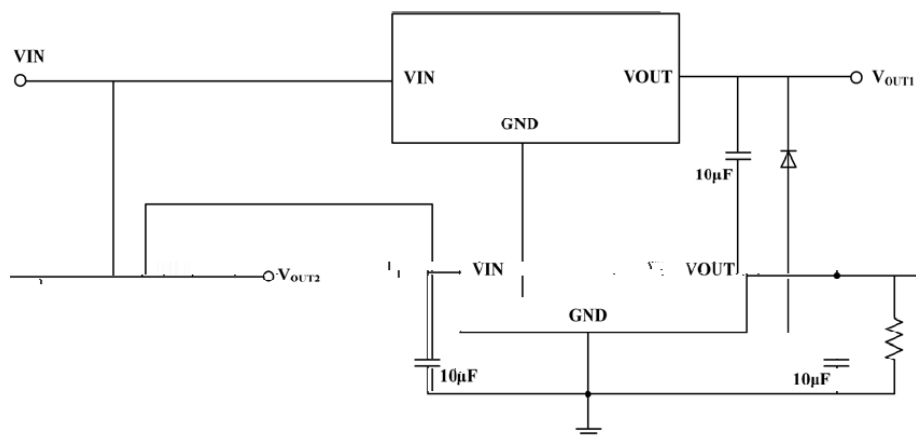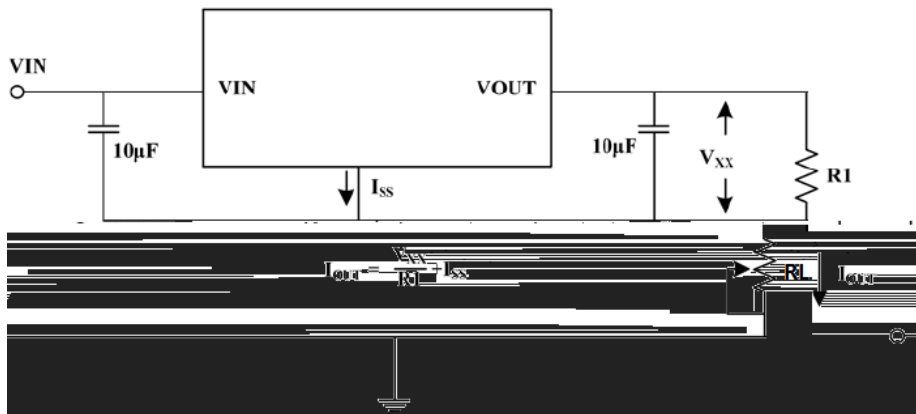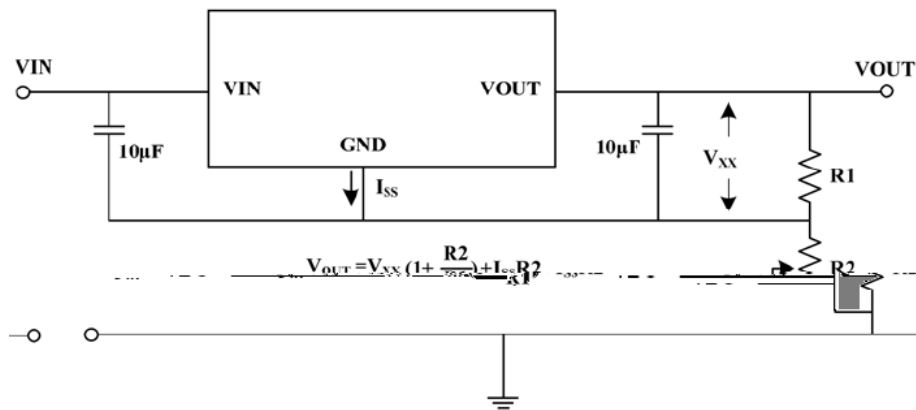


/ Package Dimensions

单位: mm

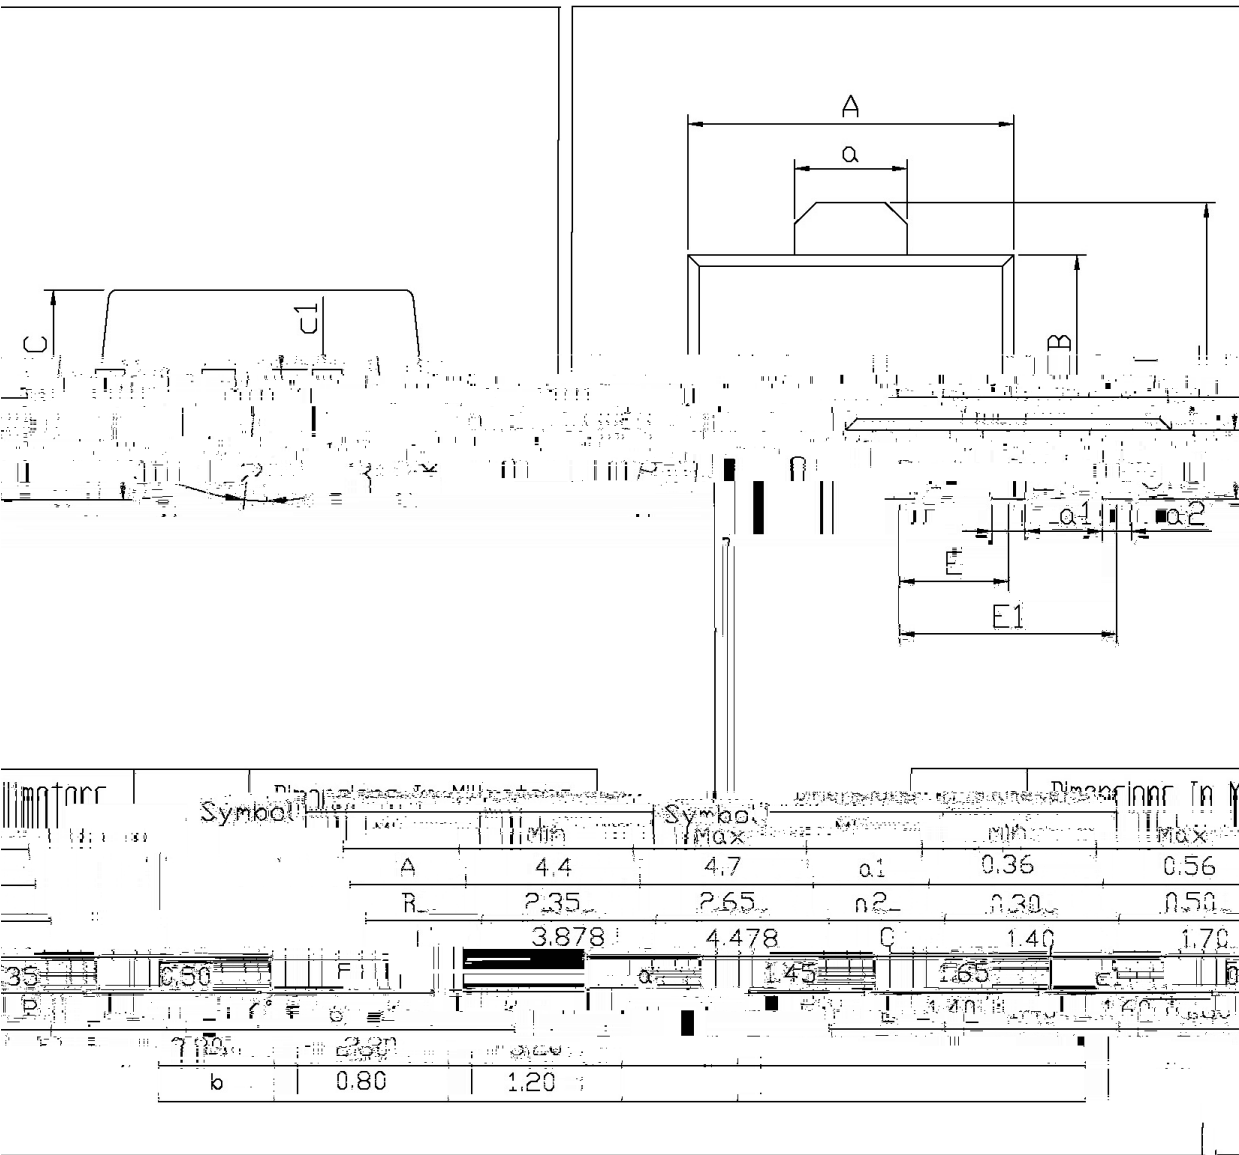

/ Marking Instructions

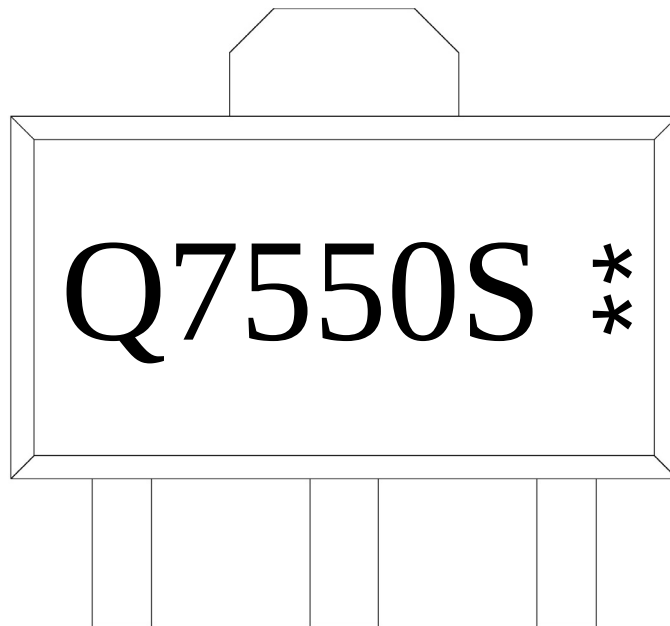

**

$\pm$ $\pm$

	1,000	7	7,000	6	42,000			

8 8