

/ Revised record

D	2015-11				
E	2020-5	1			
F	2021-4-15	1 2	3% 2%		

/ Descriptions


SOT-89

/ Features


30V	2.5μA	±2%
μ	:±2%	

/ Applications

/ Equivalent Circuit

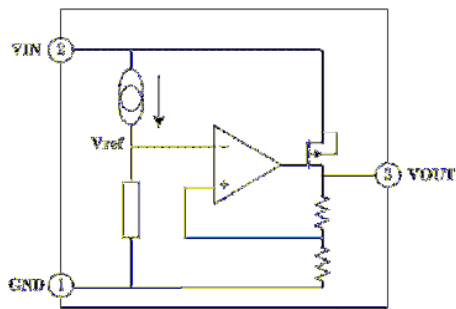

/ Pinning






/ Marking

/




			℃
			℃
			℃

	△	≤ ≤				
	△					




/ Electrical Characteristic Curve

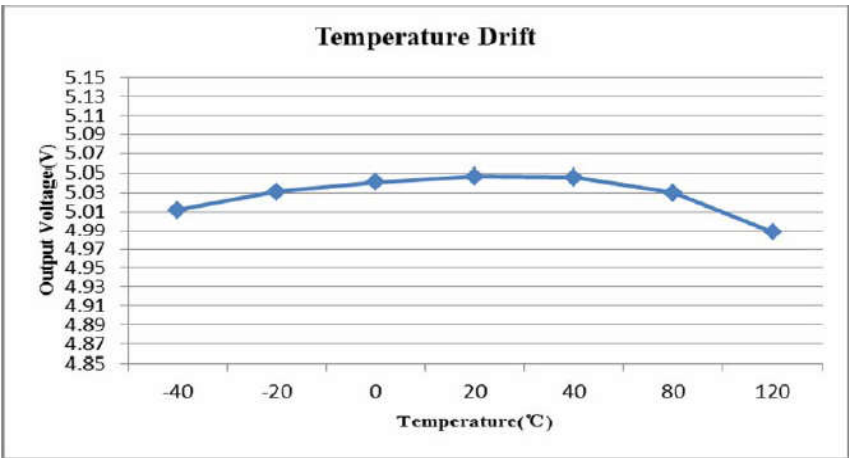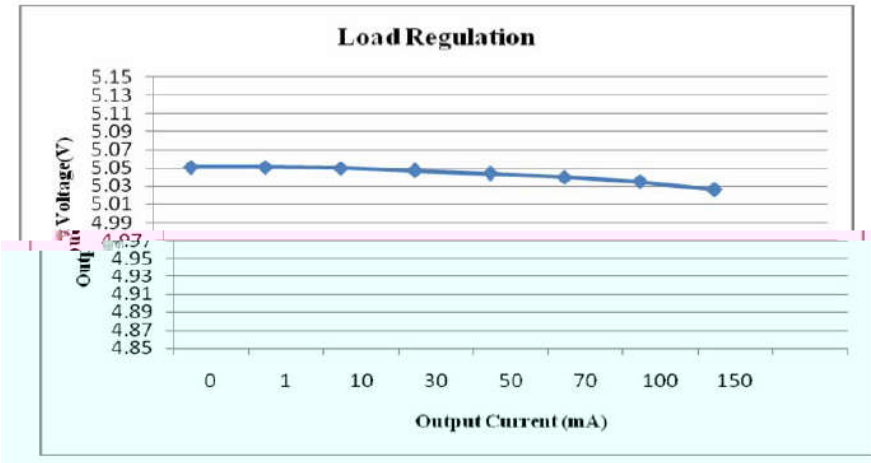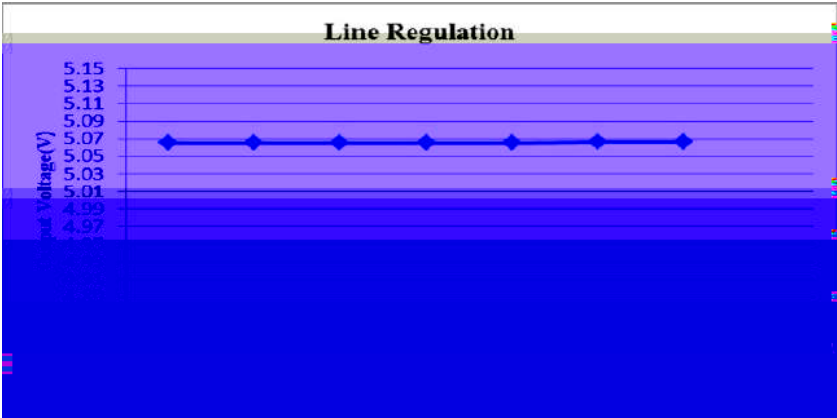


/ Typical Application Circuit

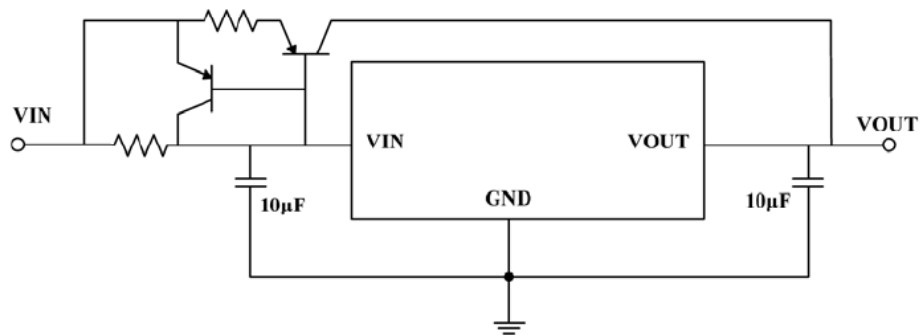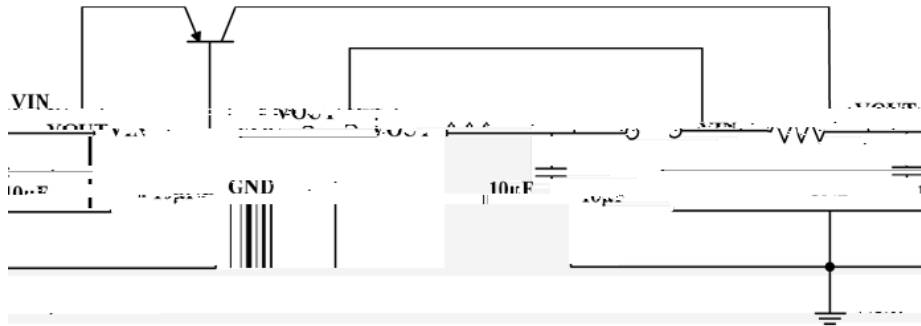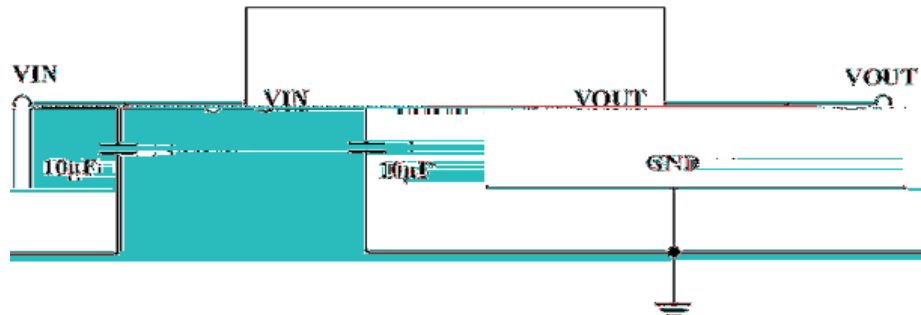


/ Typical Application Circuit

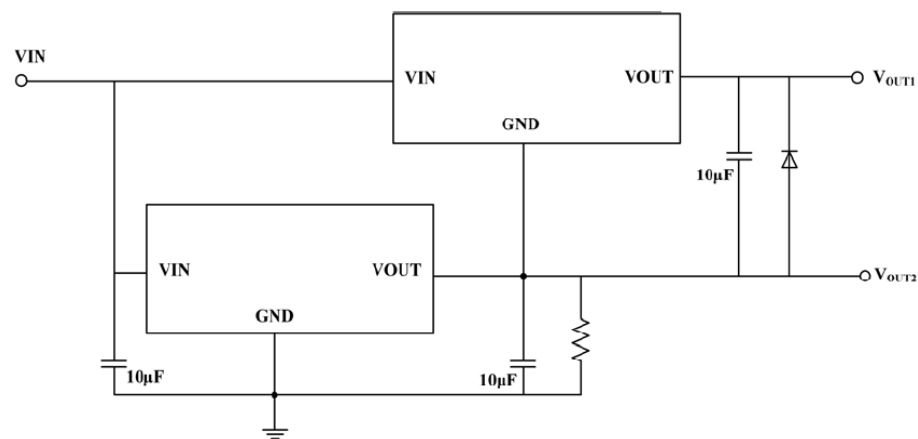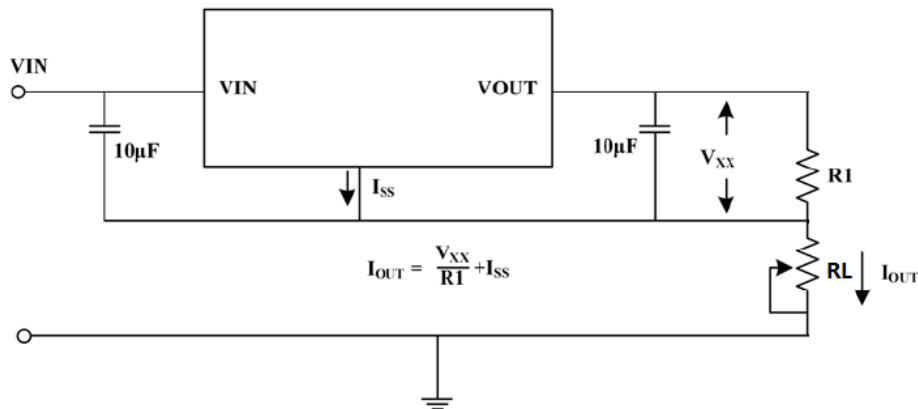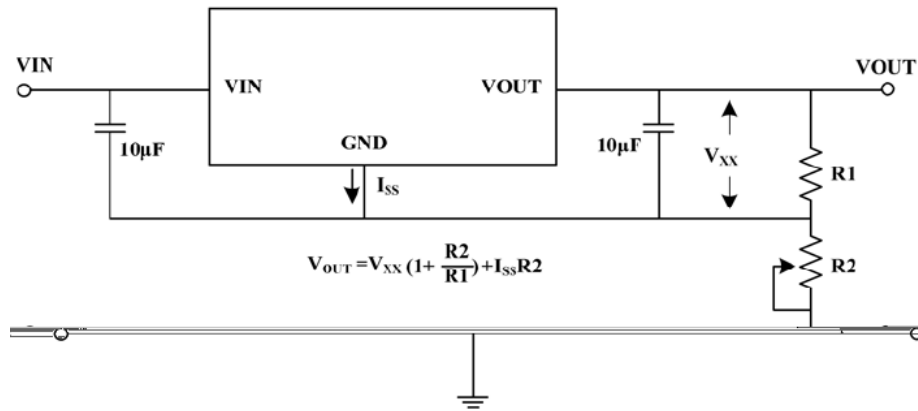

/ Package Dimensions

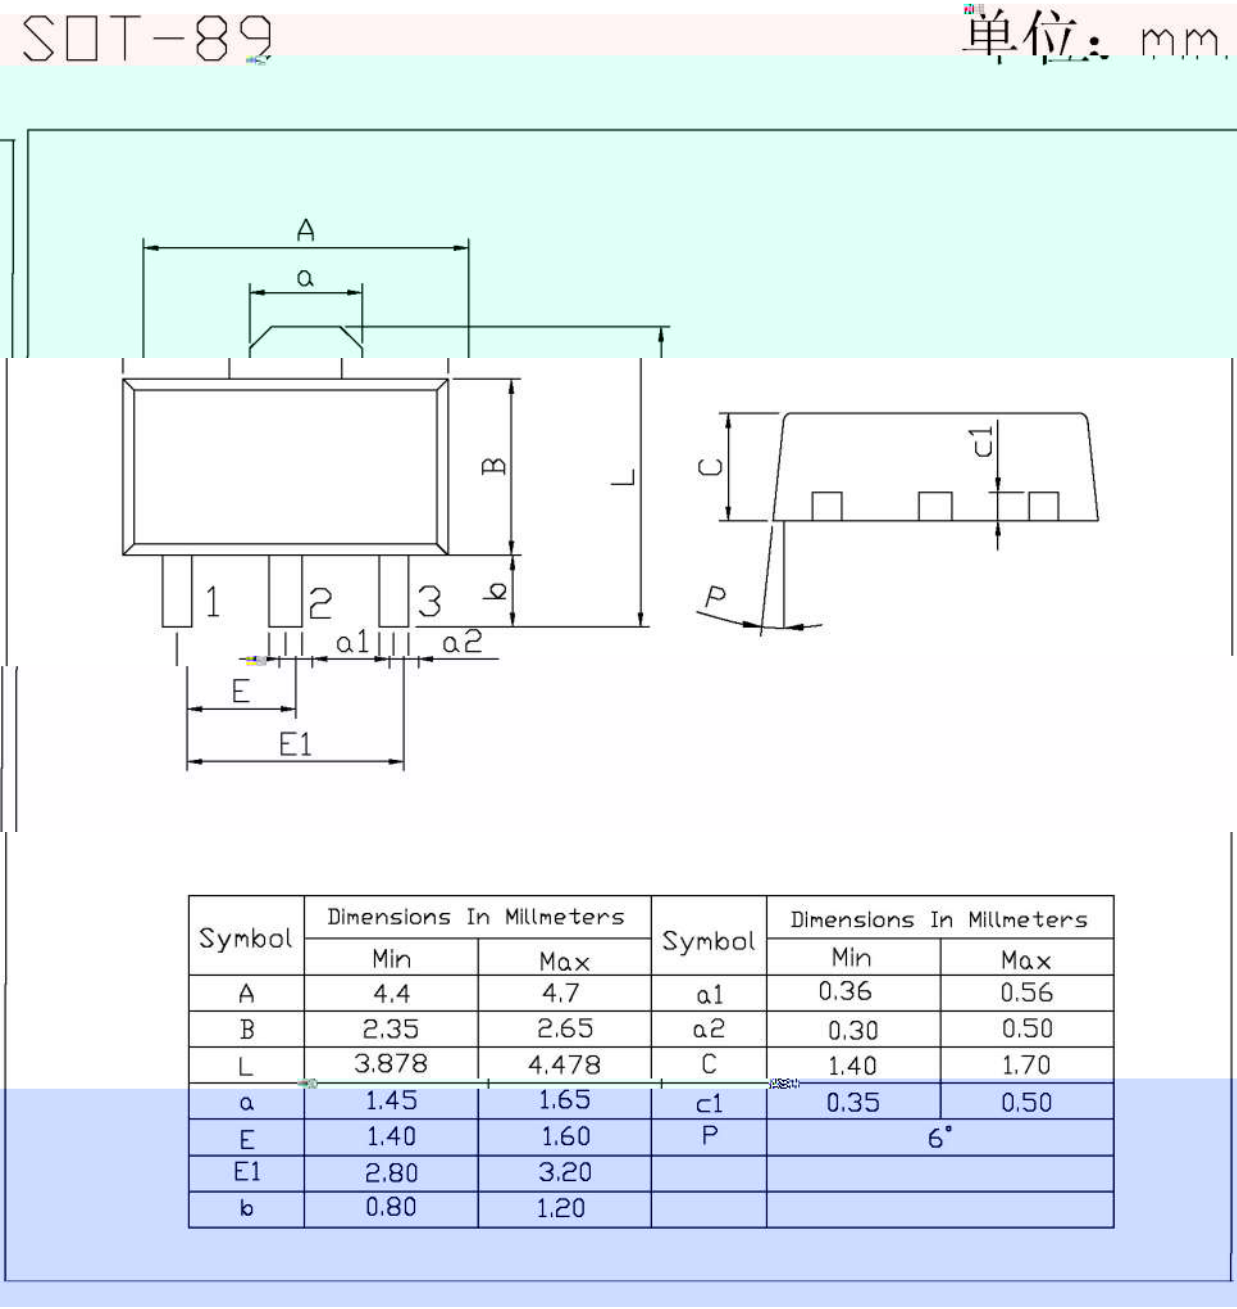

/ Marking Instructions

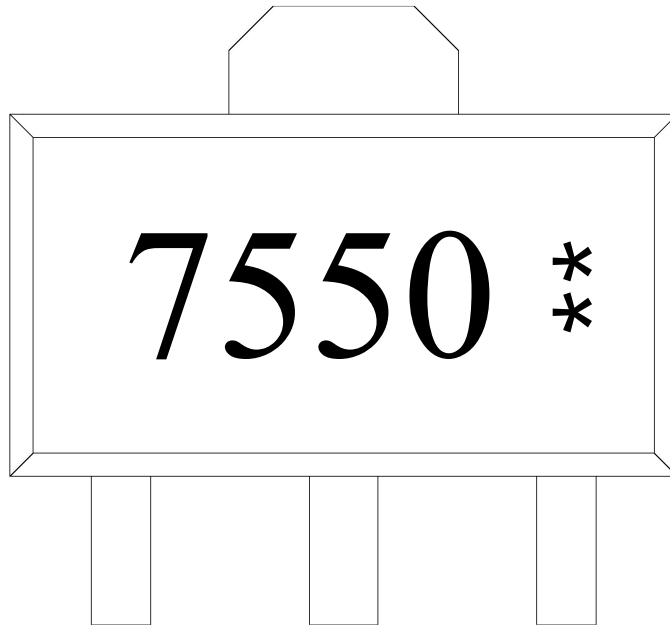

**

BRC07550T