

/ Descriptions


SOT-89

/ Features


	30V	2.5μA	±2%
AEC-Q100			
	μ	:±2%	

/ Applications

/ Equivalent Circuit

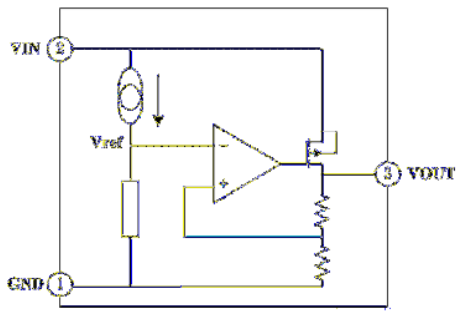

/ Pinning

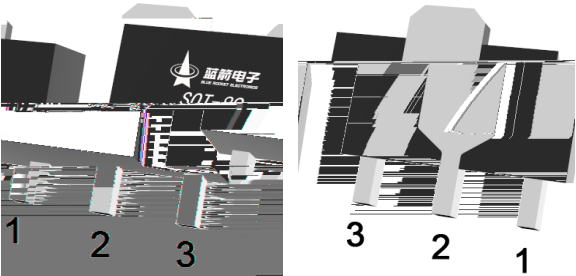

/ Marking




/

/ Absolute Maximum Ratings(Ta=25




	θ		

	Δ	≤ ≤				
		Δ				
						μ
	Δ Δ	≤ ≤				
	Δ Δ	℃ ≤ ≤ ℃				℃




/ Electrical Characteristic Curve

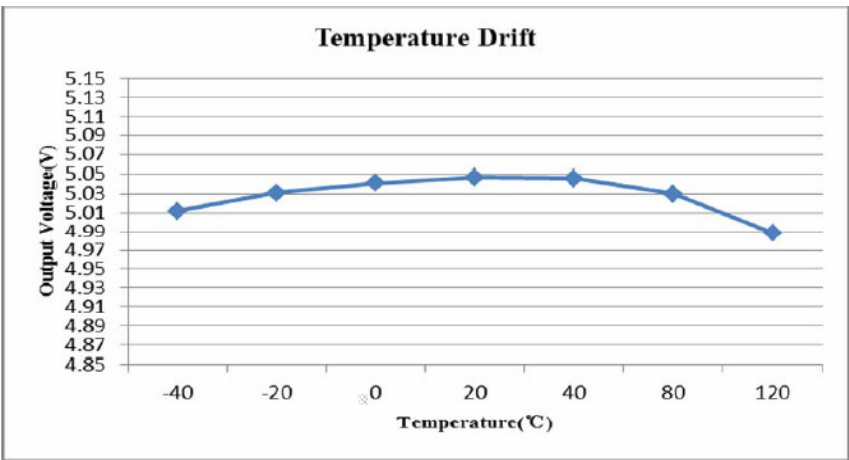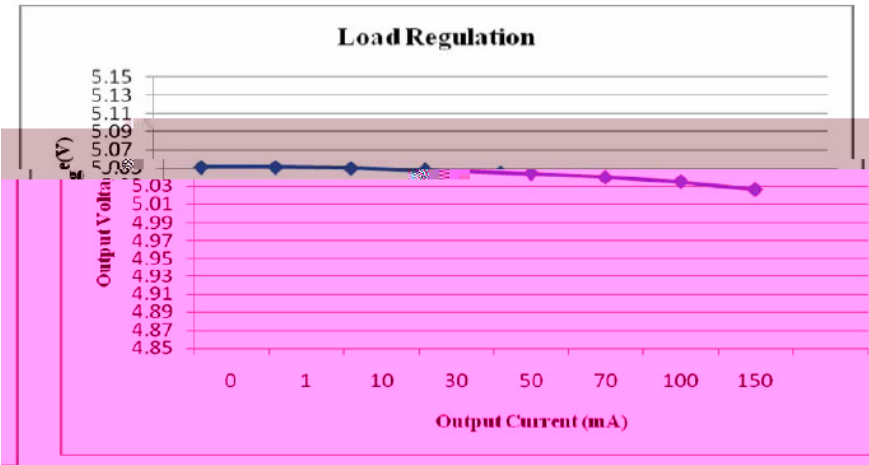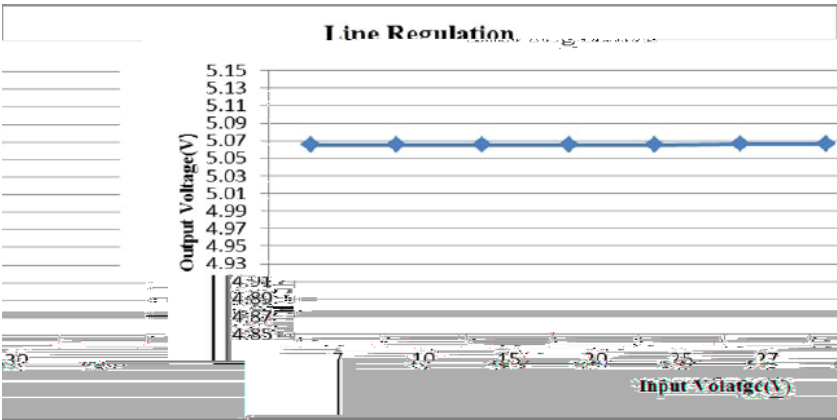

/ Typical Application Circuit

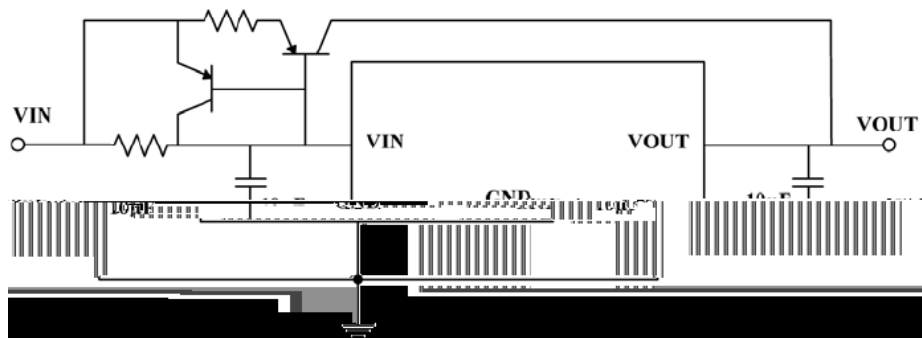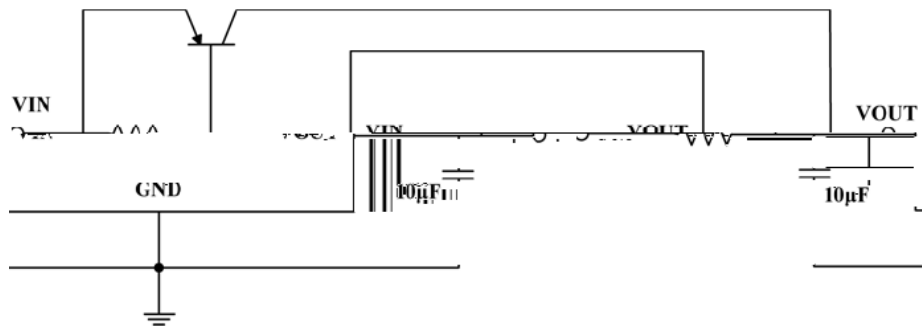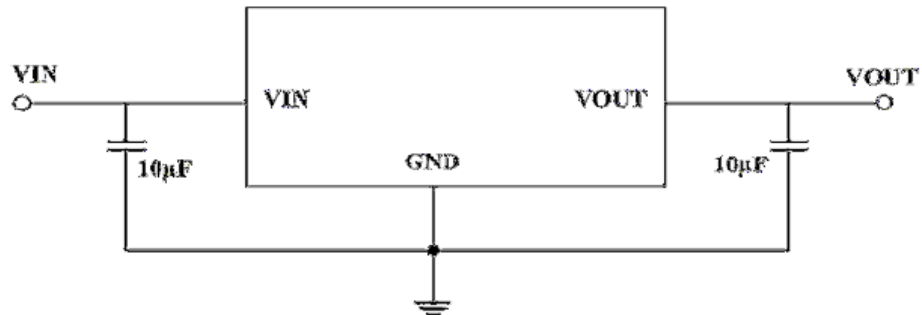


/ Typical Application Circuit

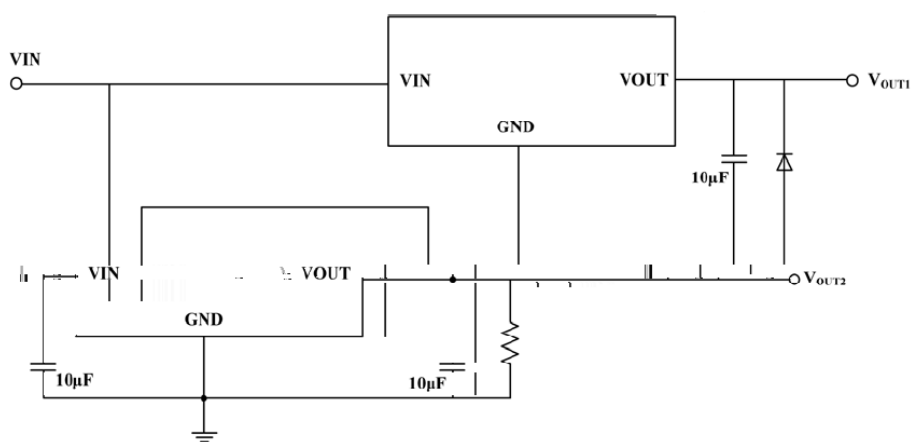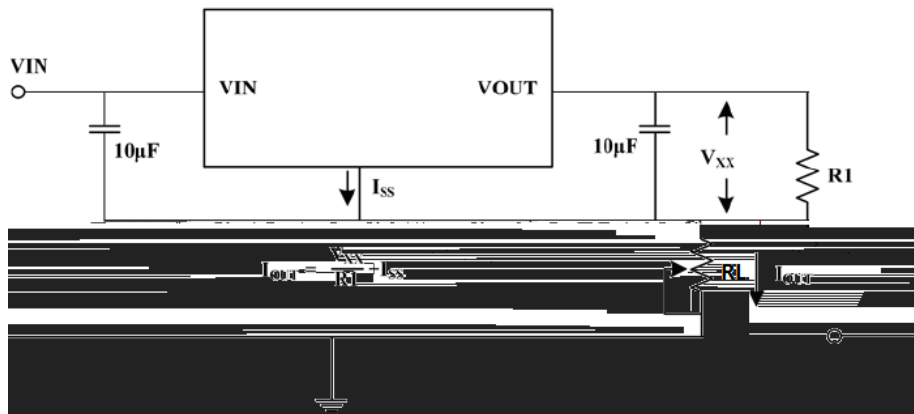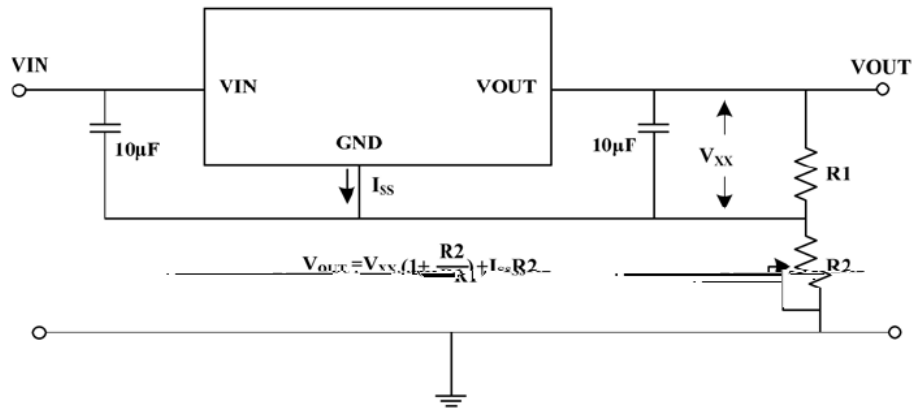


/ Package Dimensions

SNP-89

单位: mm

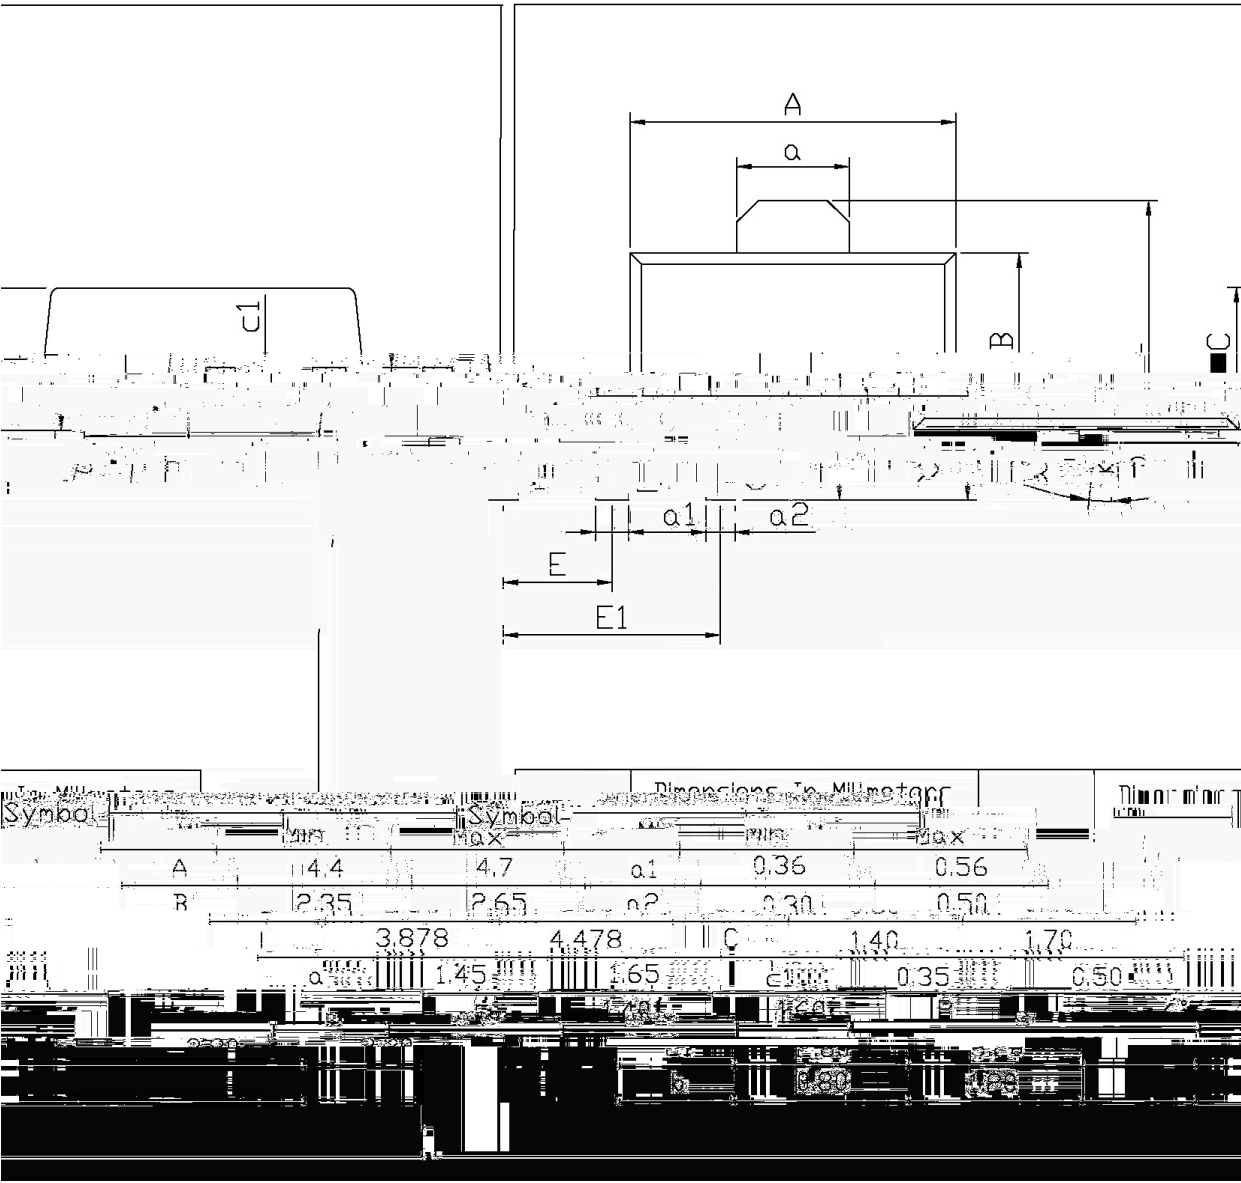


/ Marking Instructions

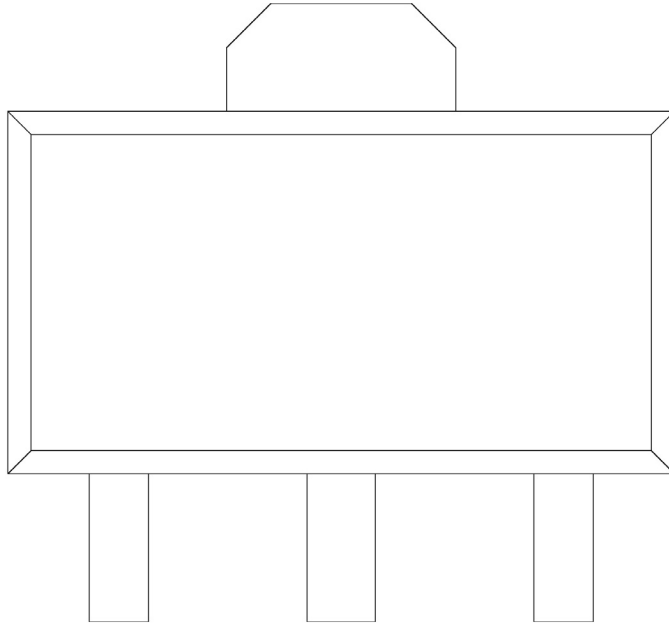

**

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

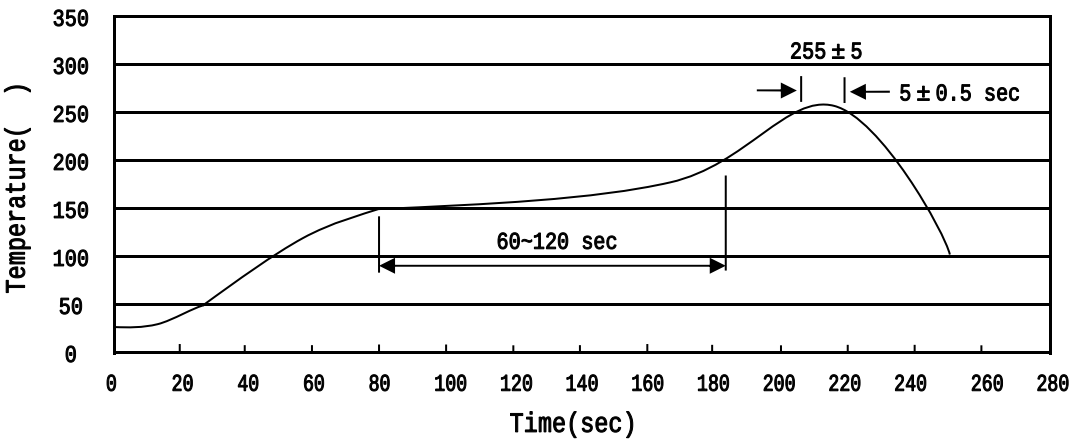

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

	1,000	7	7,000	6	42,000	"		

/ Notices