


/ Descriptions

× ×


/ Features

/ Applications

/ Equivalent Circuit



/ Pinning

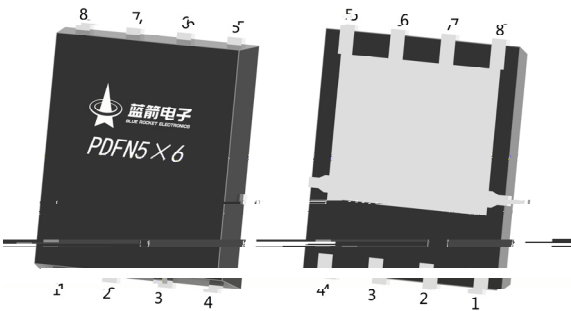

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D

/ Marking

。

/ Absolute Maximum Ratings(T_a=25)

			±	
		℃		
	≤			
		θ		
		θ		






/ Electrical Characteristics(T_a=25)

					±	
						Ω

/ Electrical Characteristics(Ta=25)

		Ω Ω				

Electrical Characteristic Curve

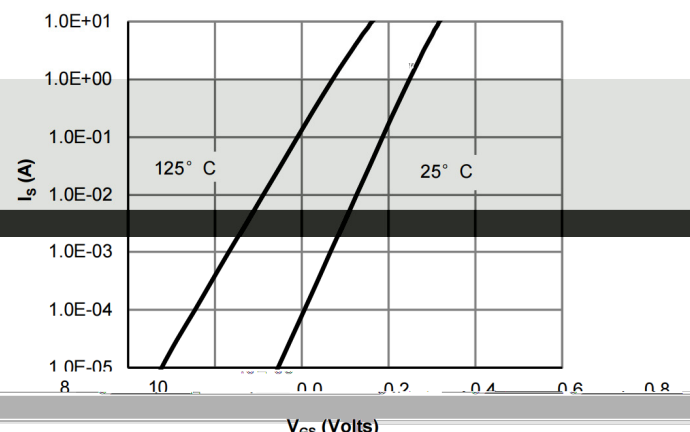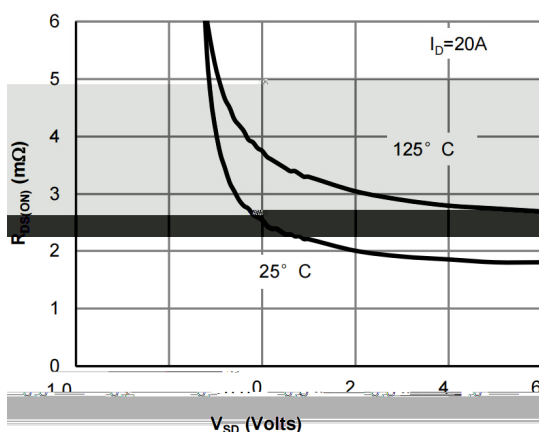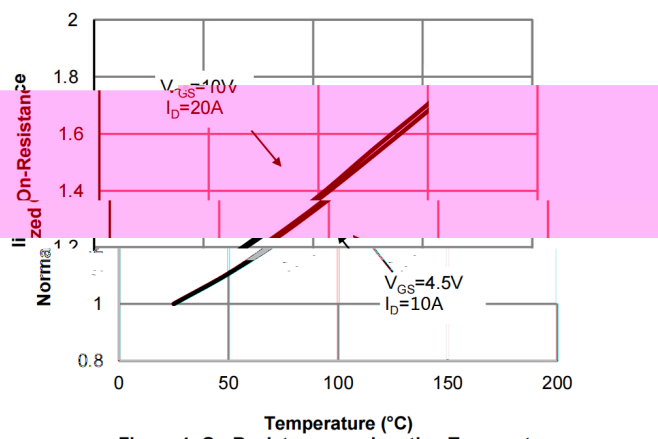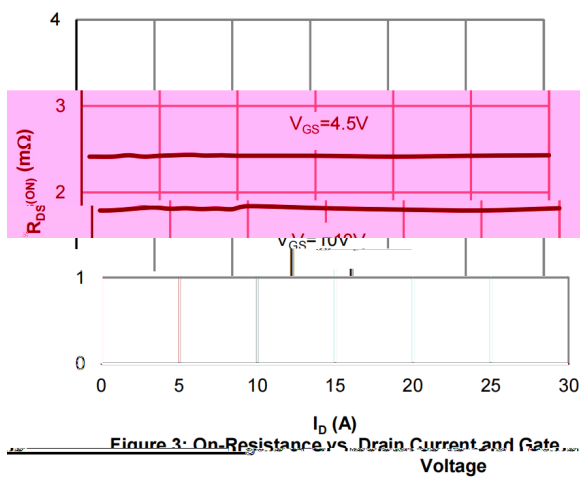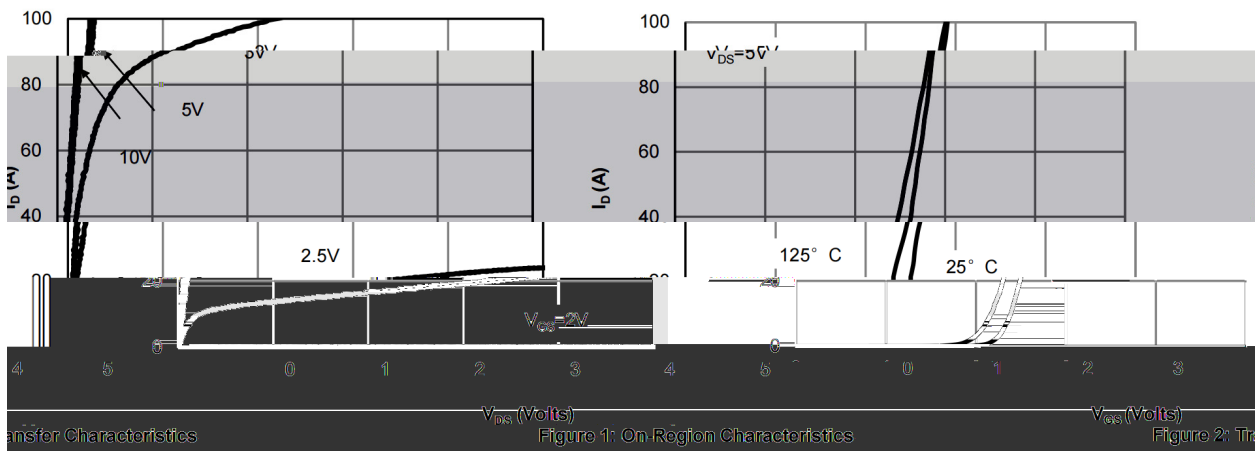

/ Electrical Characteristic Curve





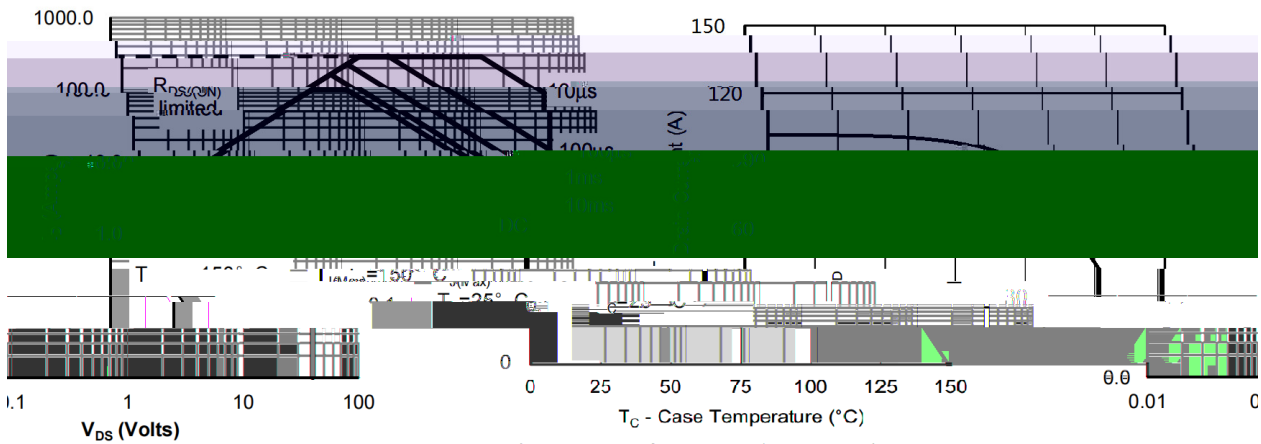


Figure 9: Maximum Forward Biased Safe Operating Area

Figure 10: Maximum Continuous Drain Current vs Case Temperature

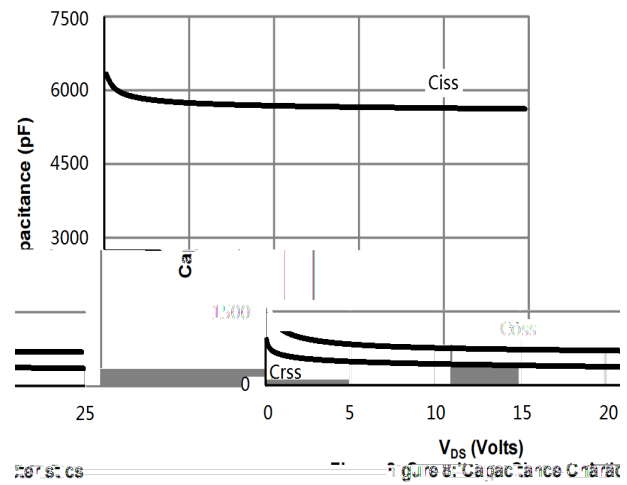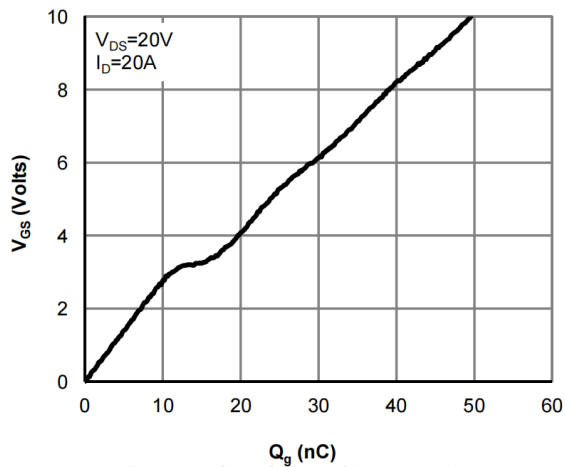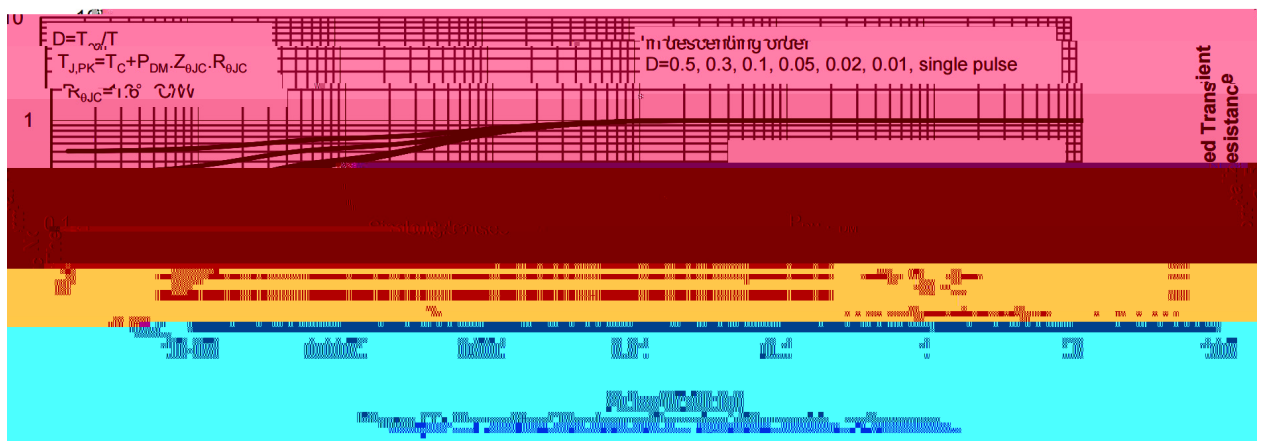


/ Package Dimensions

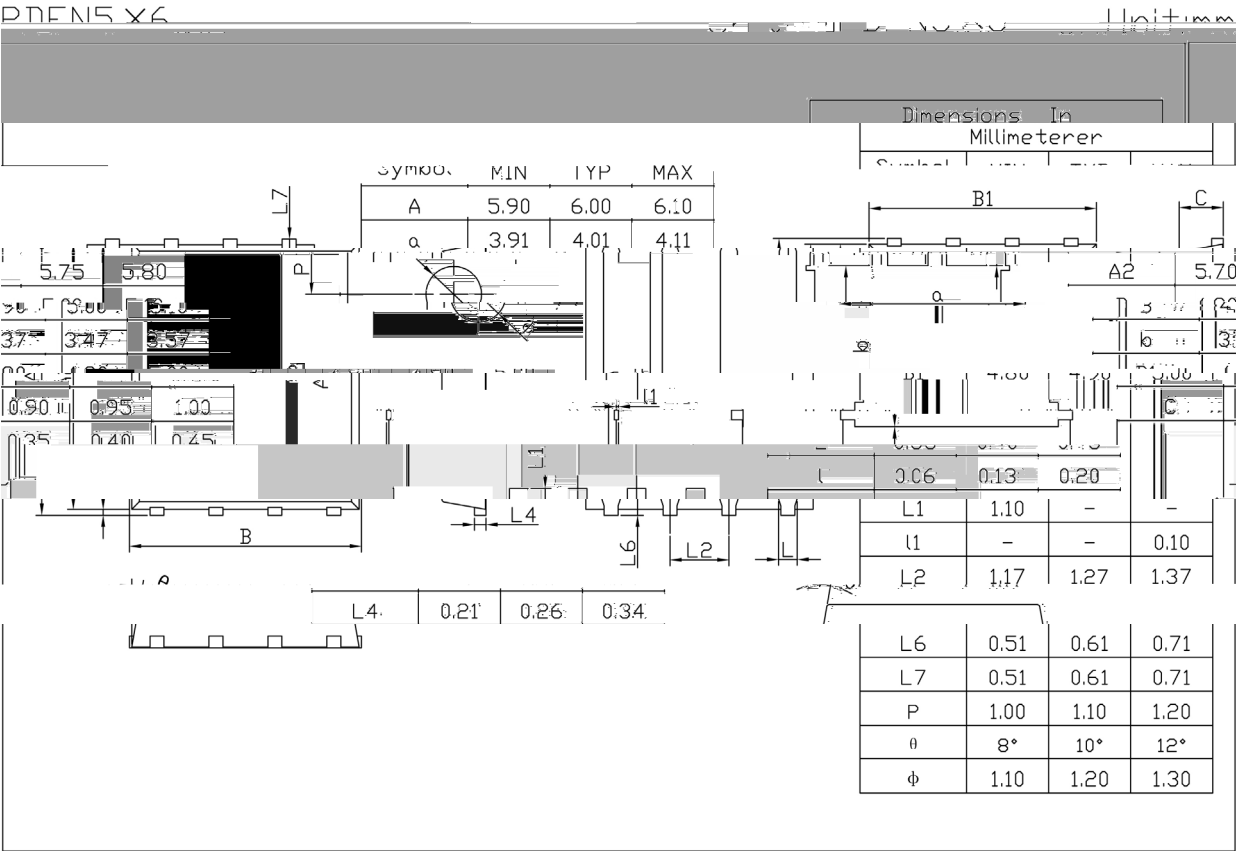

Rev.00 201812


/ Marking Instructions

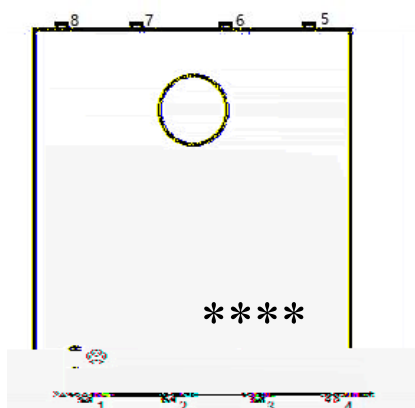

BR

Q

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

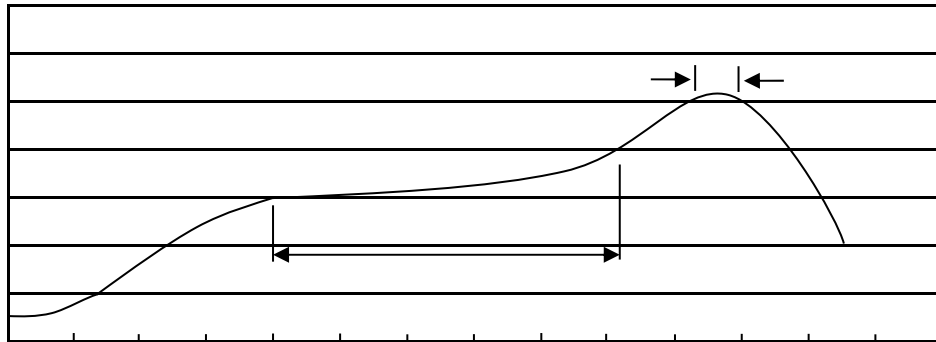 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$ $\pm$ $\pm$

/ Packaging SPEC.

	包装数量					包装尺寸		
	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
×						×	× ×	× ×

/ Notices