
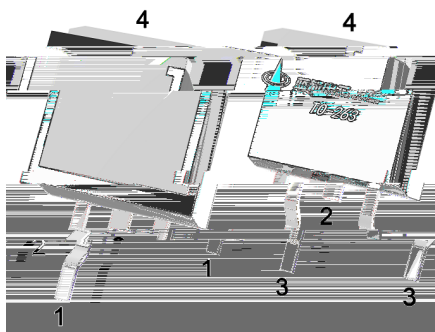


$\leq \Omega$
 Ω

$\leq \Omega$
 Ω

DEF0T434

EPV





			±	
	≤	θ		
		θ		



		μ				
						μ
					±	
		μ				
						Ω
						Ω



		Ω Ω				

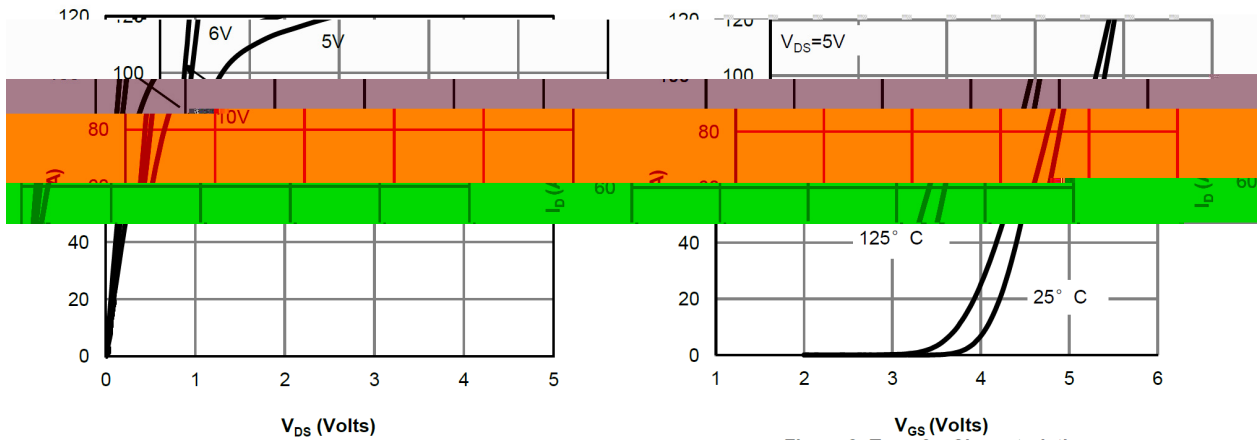


Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics

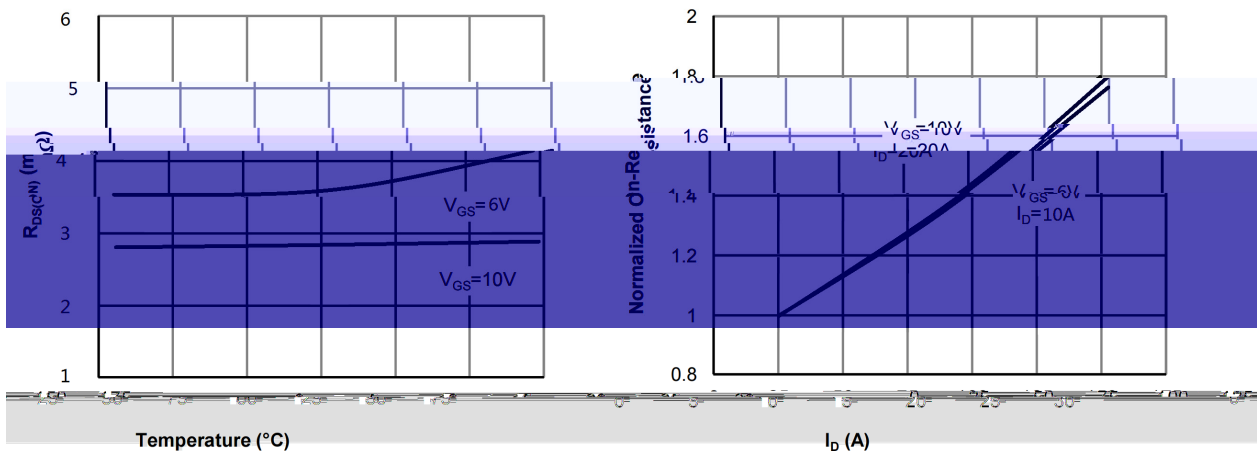


Figure 3: On-Resistance vs. Junction Temperature

Figure 4: On-Resistance vs. Drain Current and Gate Voltage

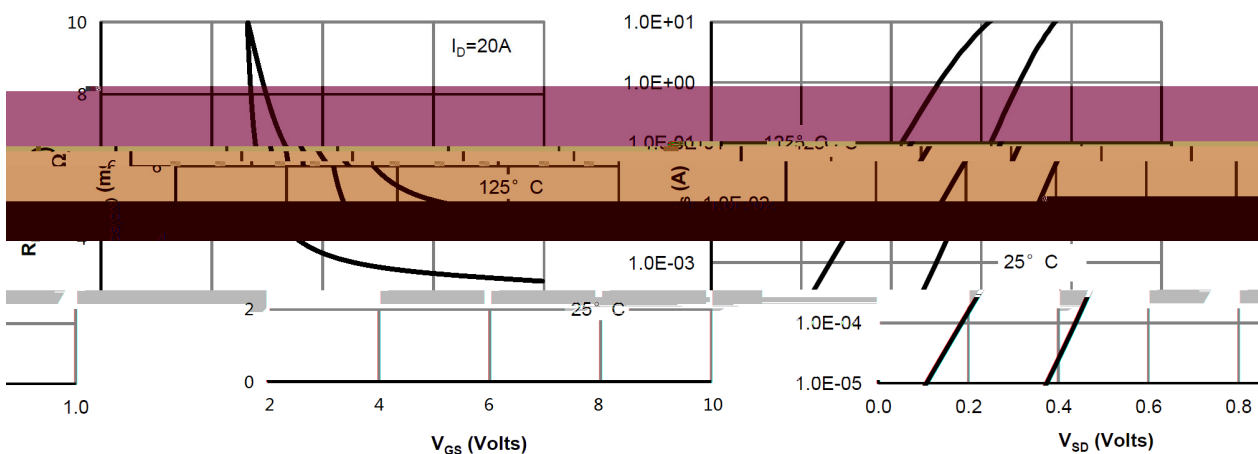


Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body Diode Characteristics

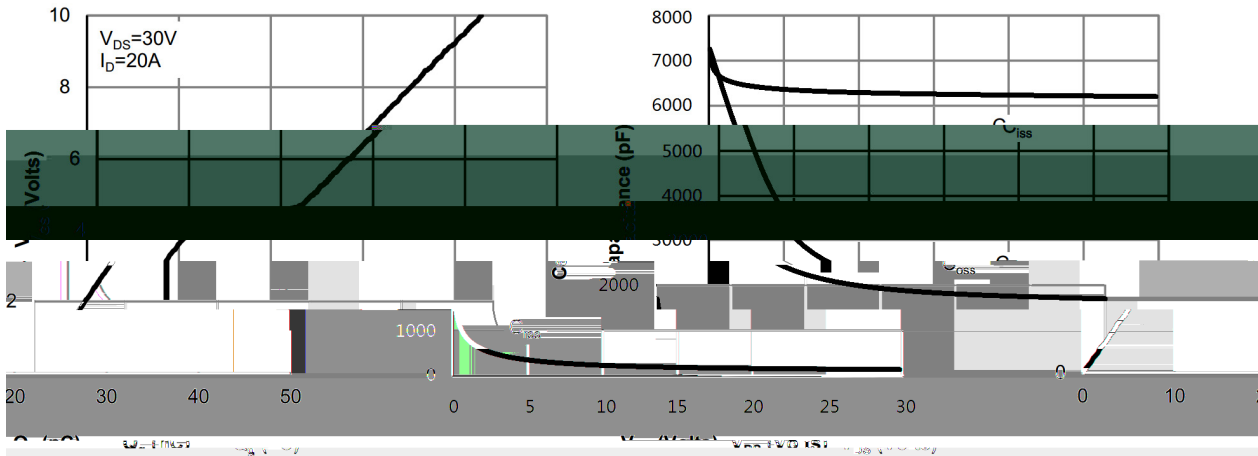


Figure 7: Gate-Charge Characteristics

Figure 8: Capacitance Characteristics




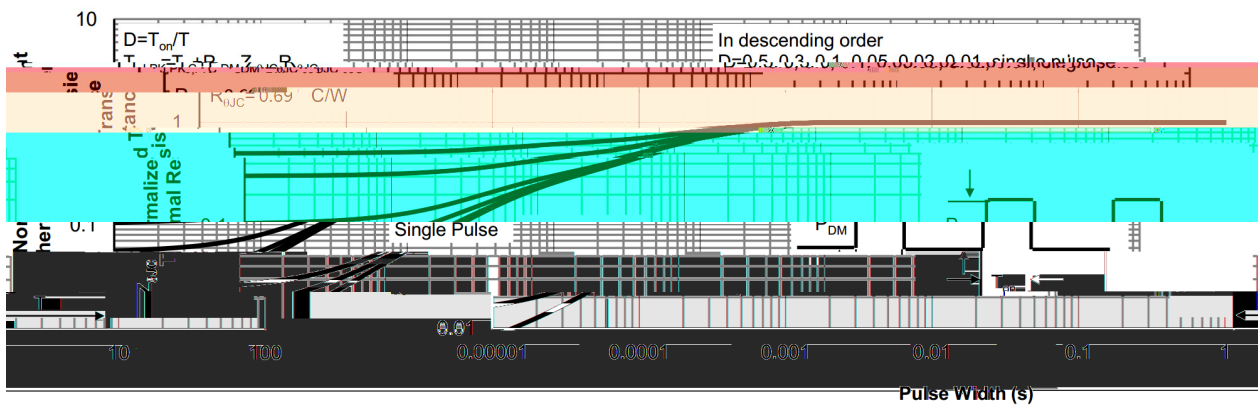


Figure 10: Normalized Maximum Transient Thermal Impedance

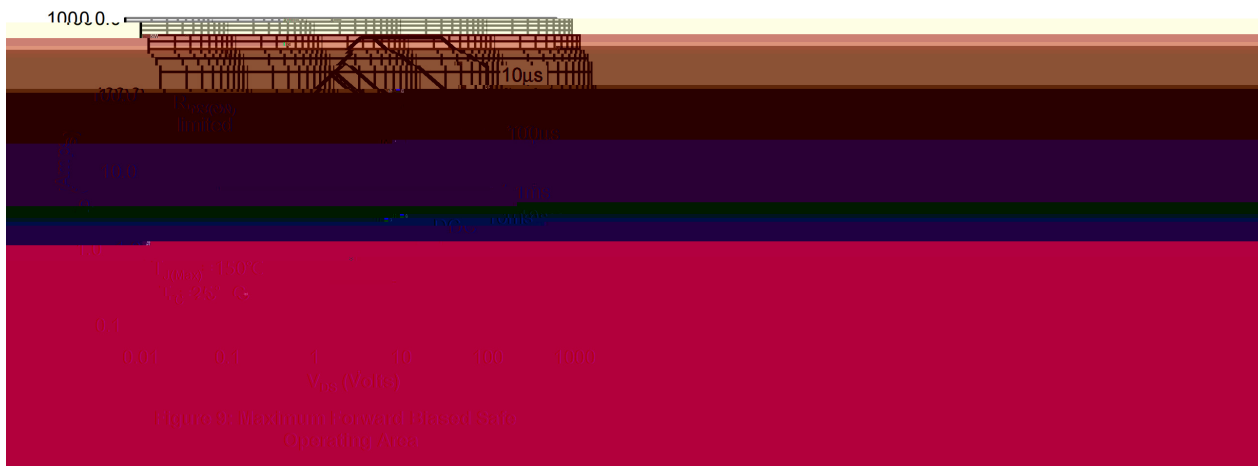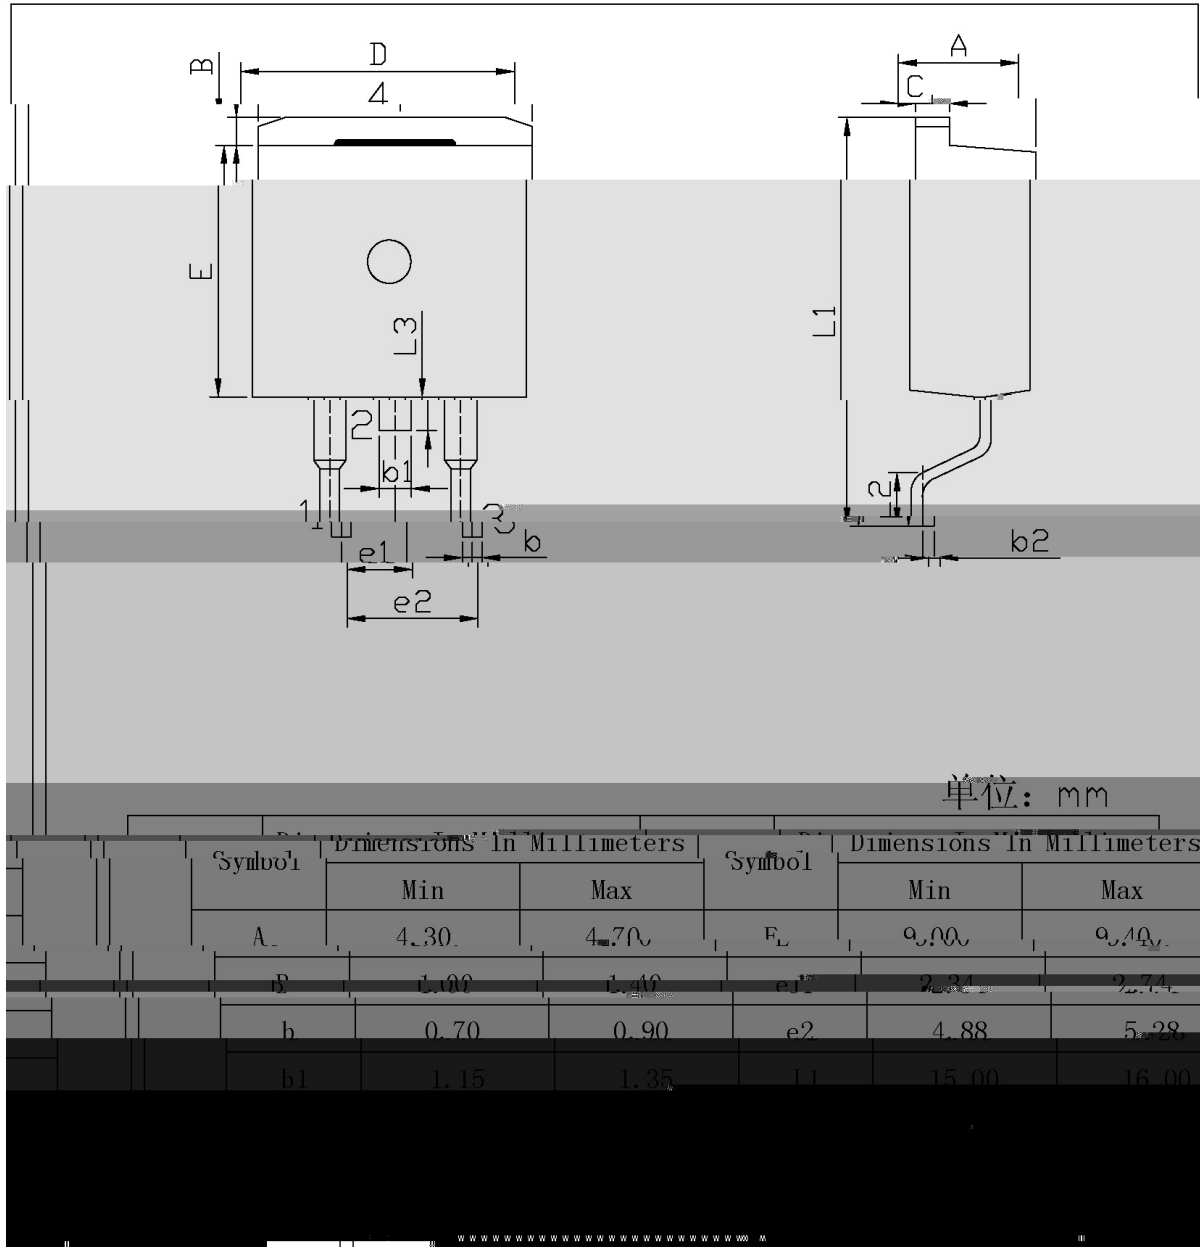


TH-253

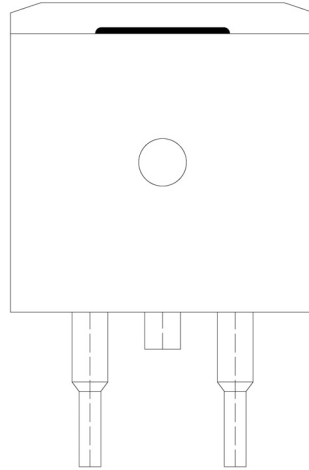

EU

363Q39VH

Temperature Profile for IR Reflow Soldering(Pb-Free)

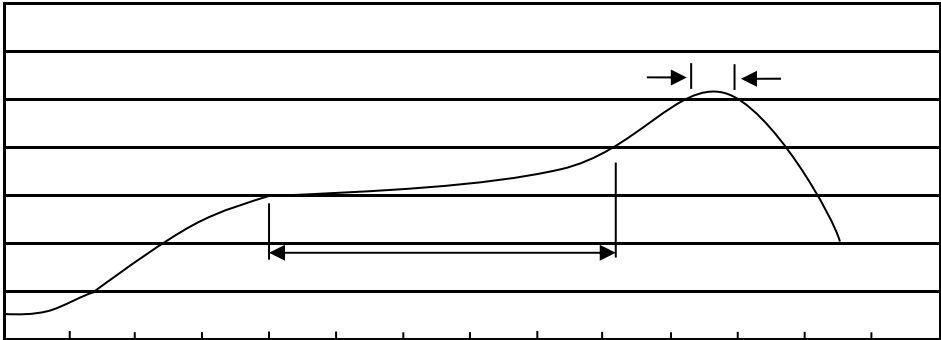

±

±

±

±

±

±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box