



Ω
 Ω

Ω
 Ω

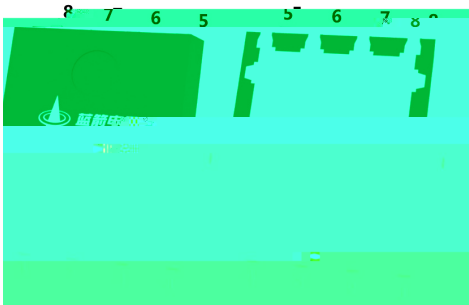

Pin	极性
1	S
2	S
3	S
4	G
5	D
6	D
7	D
8	D



		℃		
			±	
		℃		
	≧	θ		
		θ		



					±	
						Ω



		Ω Ω				

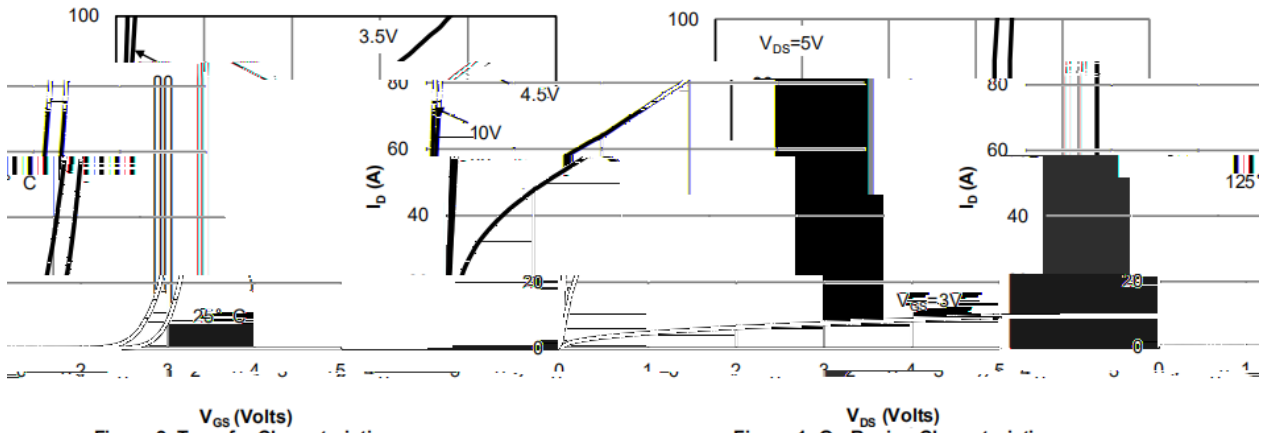


Figure 2: Transfer Characteristics

Figure 1: On-Region Characteristics






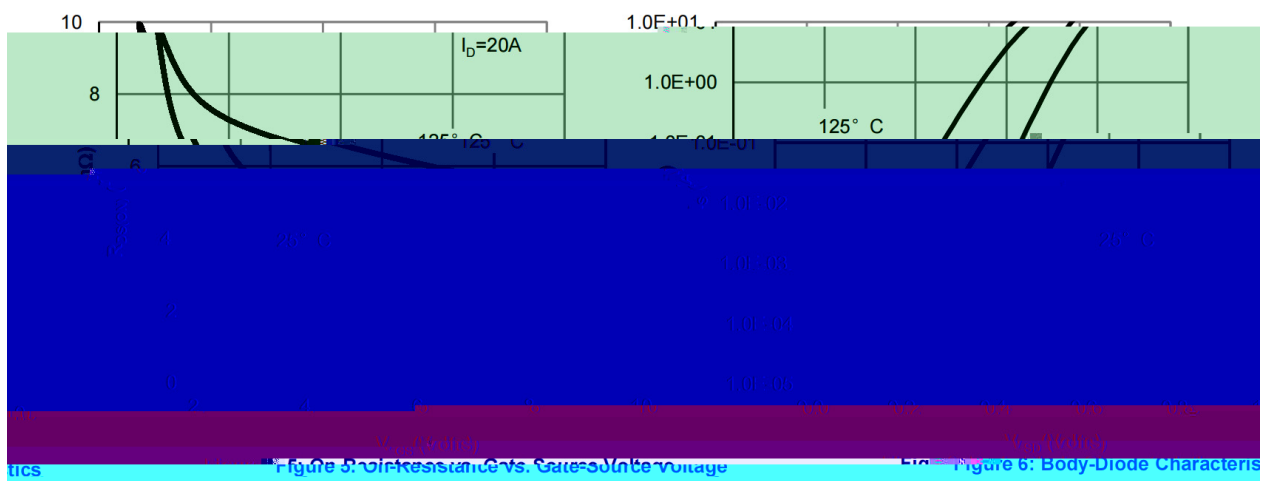



Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics

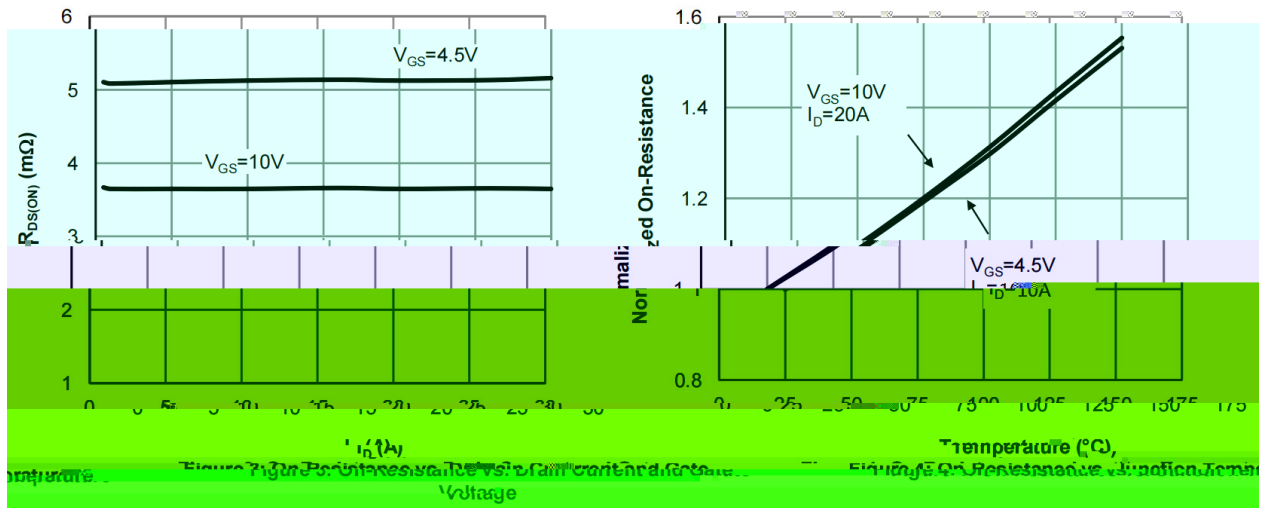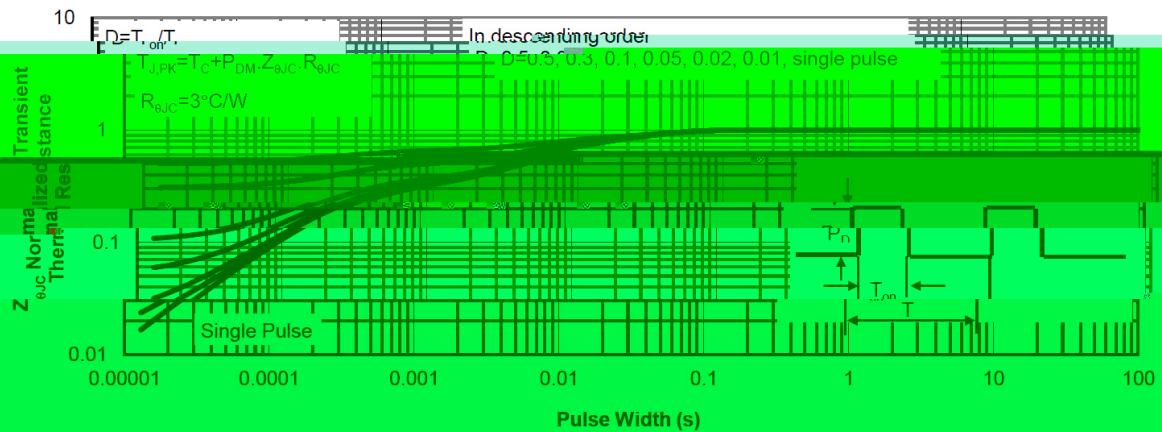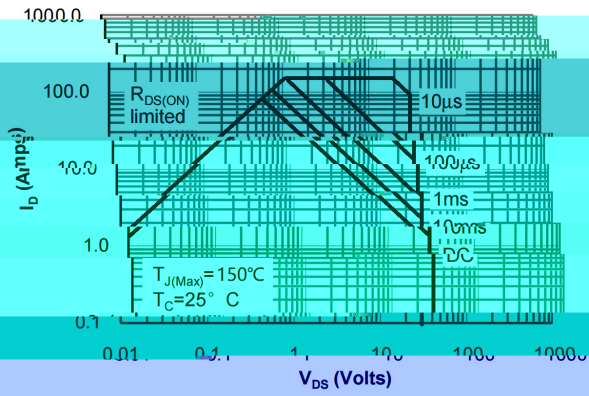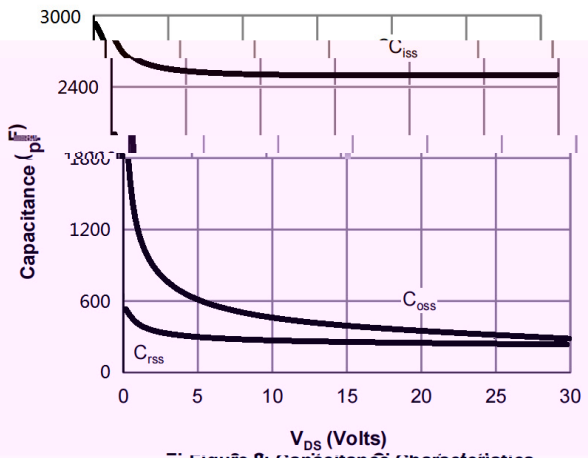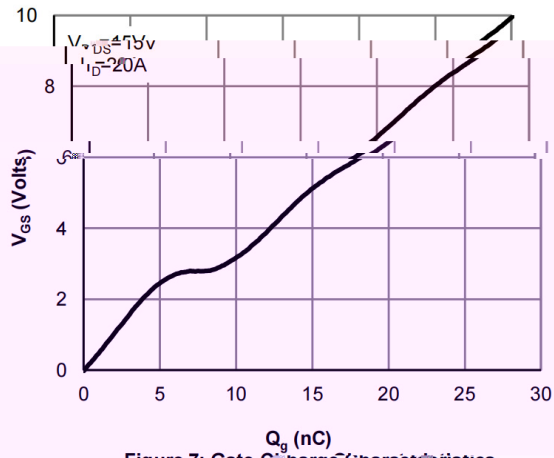


PDFN5 X6

Unit:mm

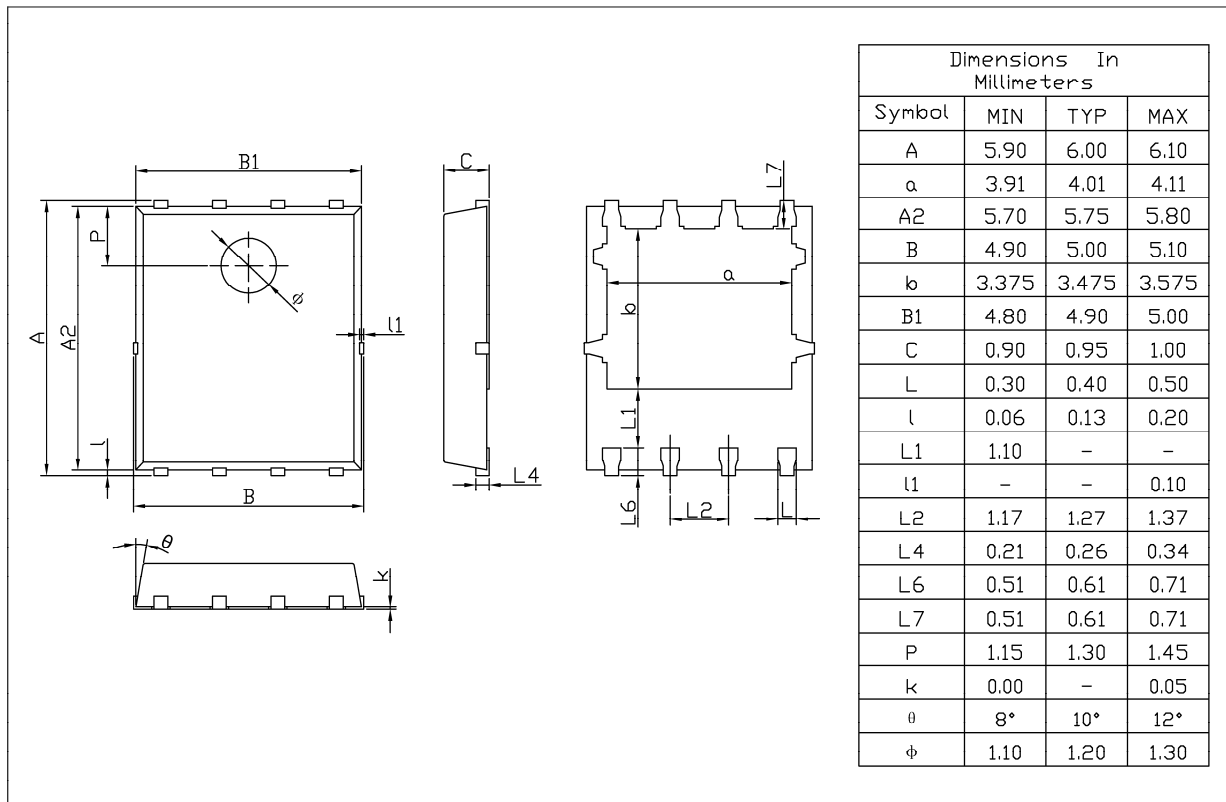

Rev.02 202510

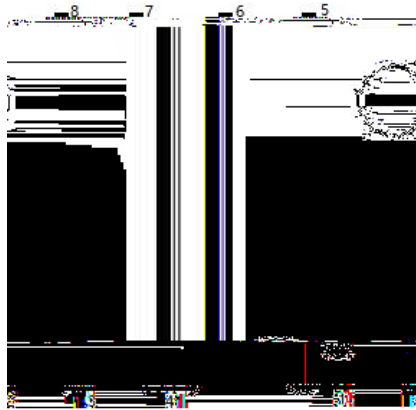

Temperature Profile for IR Reflow Soldering(Pb-Free)

