

Ω	N	Θ	μ
		±	



v "Ω	γ N	ℓ τ	ω η Æ	ε ζ Æ	ω z Æ	D H
		Ω Ω				

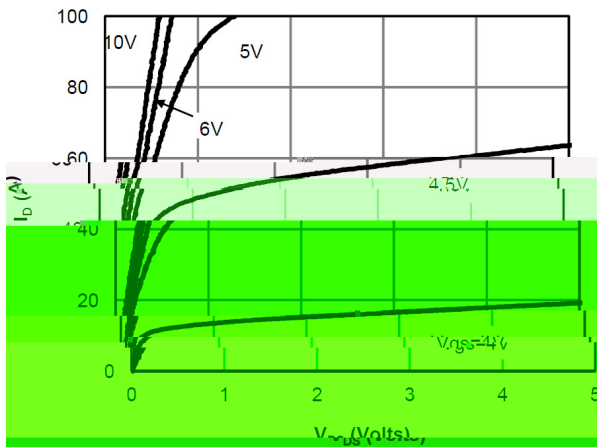


Fig 1: On-Region Characteristics


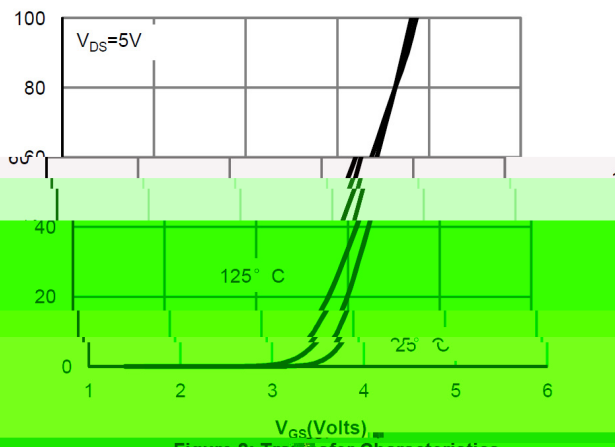


Figure 2: Transfer Characteristics

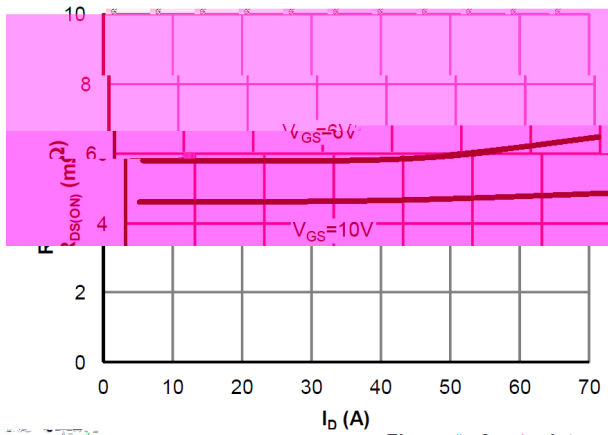

vs. Junction Temperature

Figure 3: On-Resistance vs. Drain Current and Gate Voltage

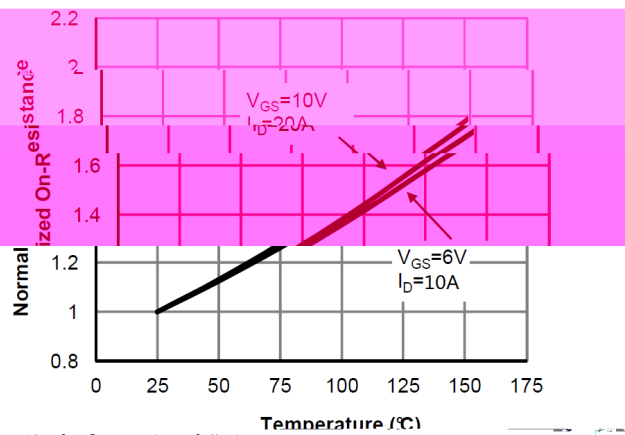


Figure 4: On-Resistance

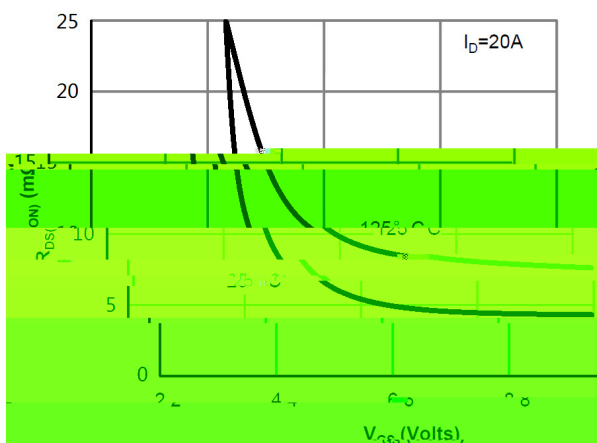


Figure 5: On-Resistance vs. Gate-Source Voltage



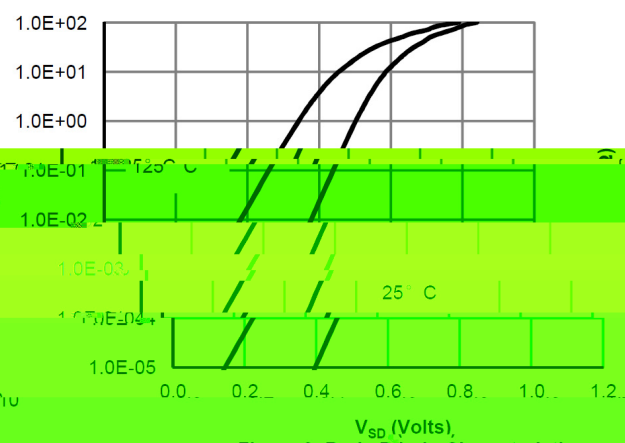


Figure 6: On-Resistance vs. Drain-Source Voltage

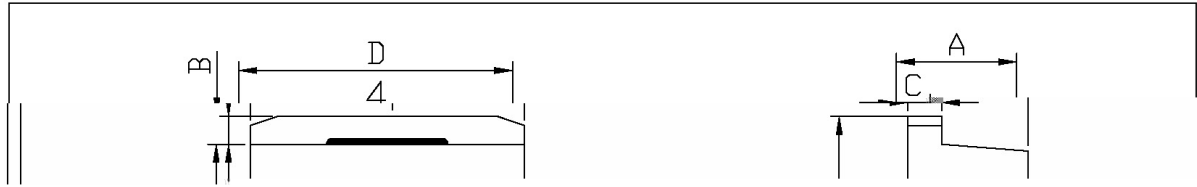

单位: mm

Symbol	Dimensions In Millimeters		Symbol	Dimensions In Millimeter	
	Min	Max		Min	Max
A	4.30	4.70	e1	2.34	2.74
B	1.00	1.40	e2	4.88	
b	0.70	0.90			

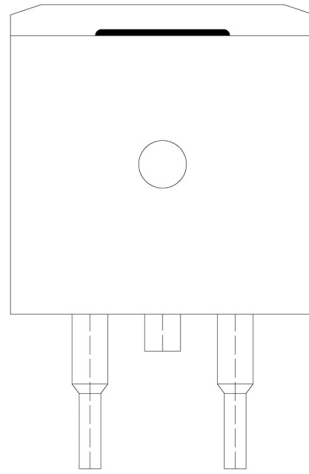


” X

EU X ㄟ 3^N ㄱ

388Q3;VK X ㄟ 3^N ㄱ

---- X ㄟ 1 F ㄱ^N ㄱ 1 1 F ㄱ^N ㄱ ㄱ

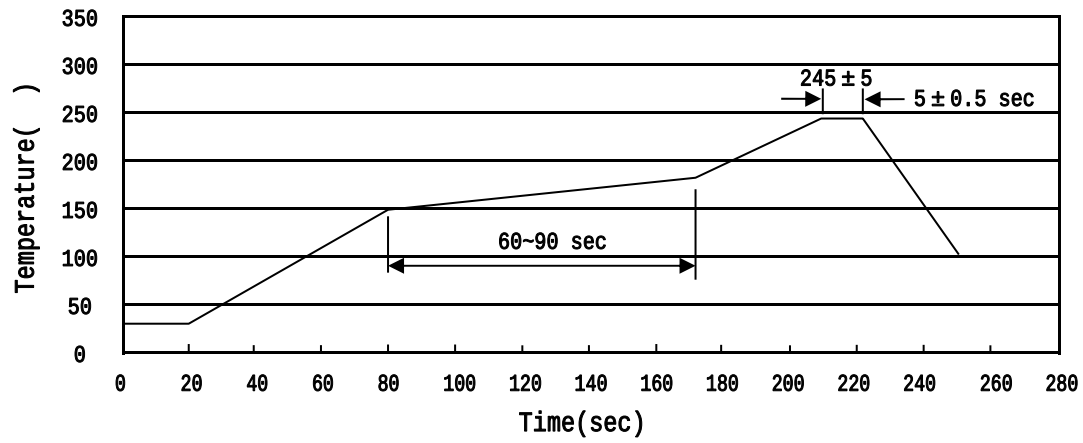

” X

♫ □ ŷ K † i`H K
Š Œ □ ŷ ° † i`H    `Y ʌ ʌ °
i` ʌ, ɔ ŷ ʌ K †

†
° † °
†

□ ŷ X ° † `H X °

ɔ` ʌ

„ ʌ ʌ
