


/ Descriptions

/ Features


/ Applications

BMS

/ Equivalent Circuit



/ Pinning

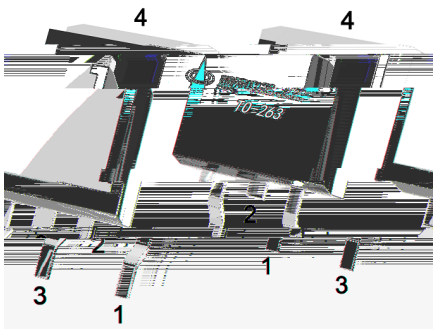

/ Marking

		±	

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

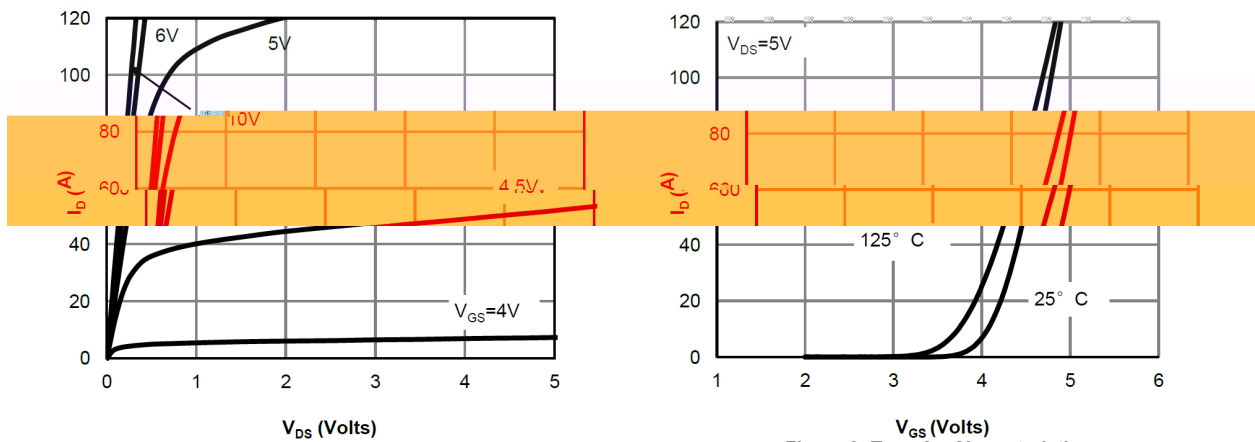


Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics





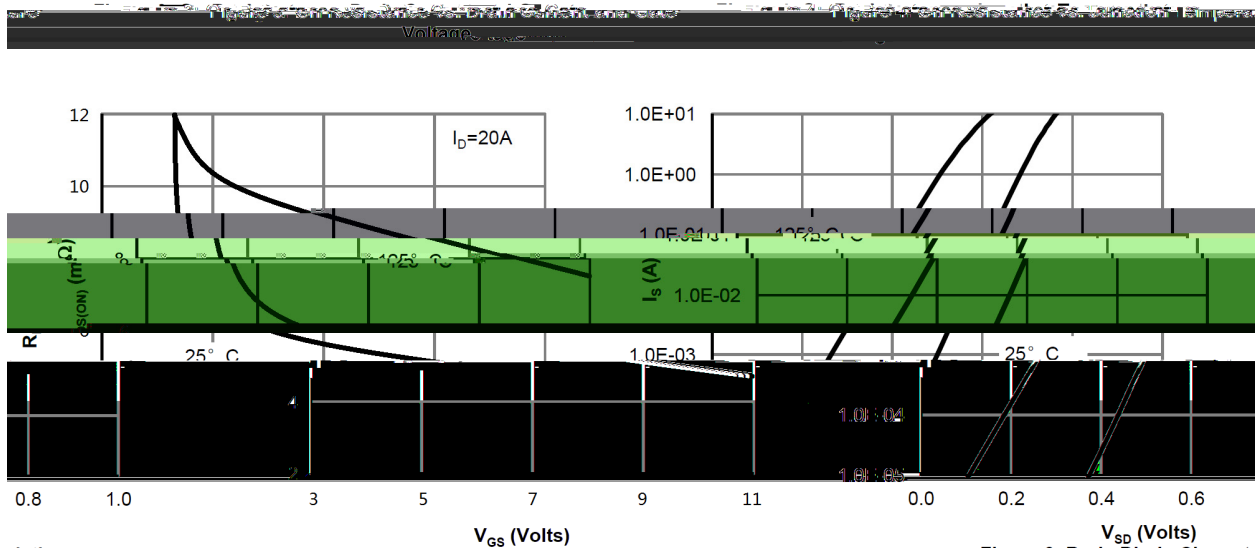



Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics

/ Electrical Characteristic Curve

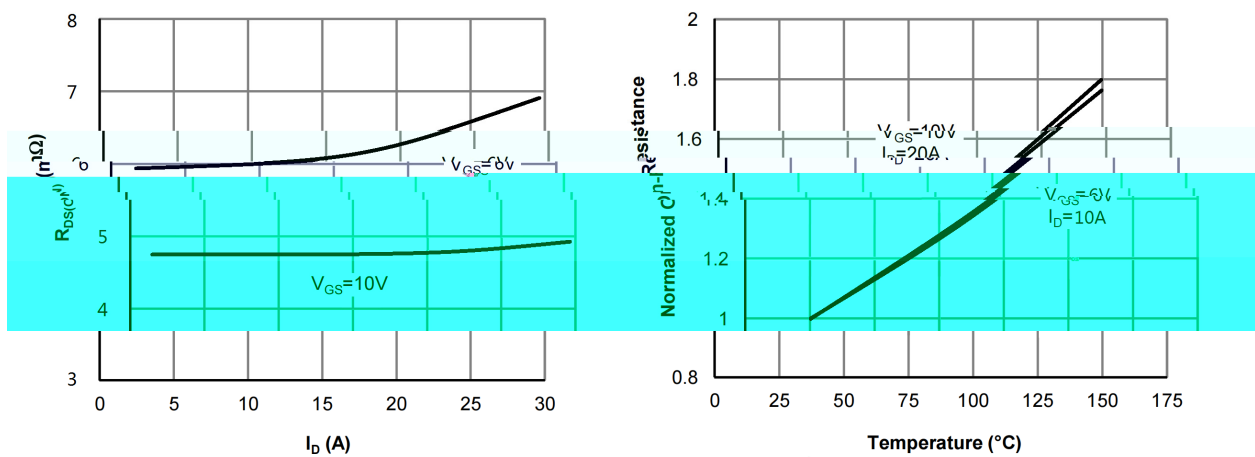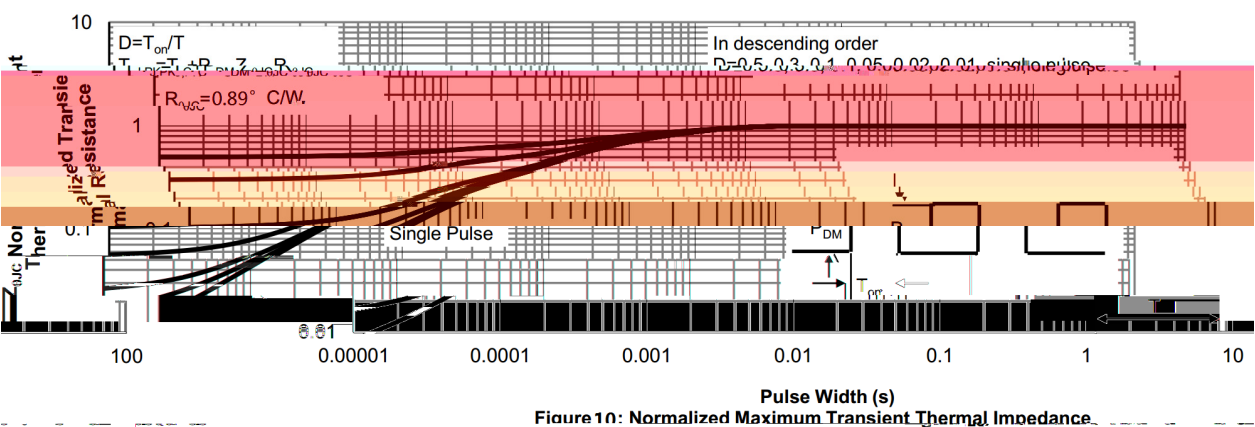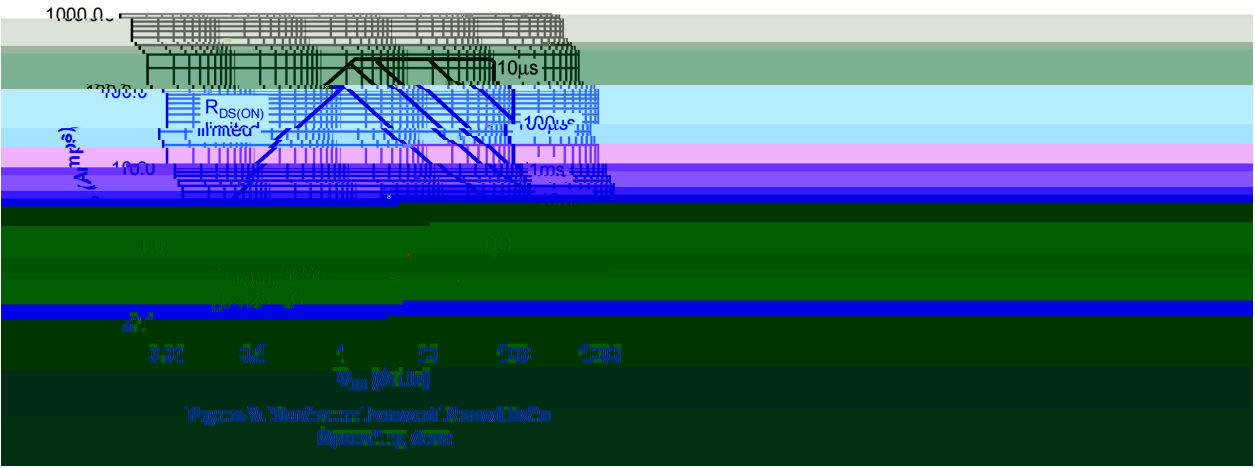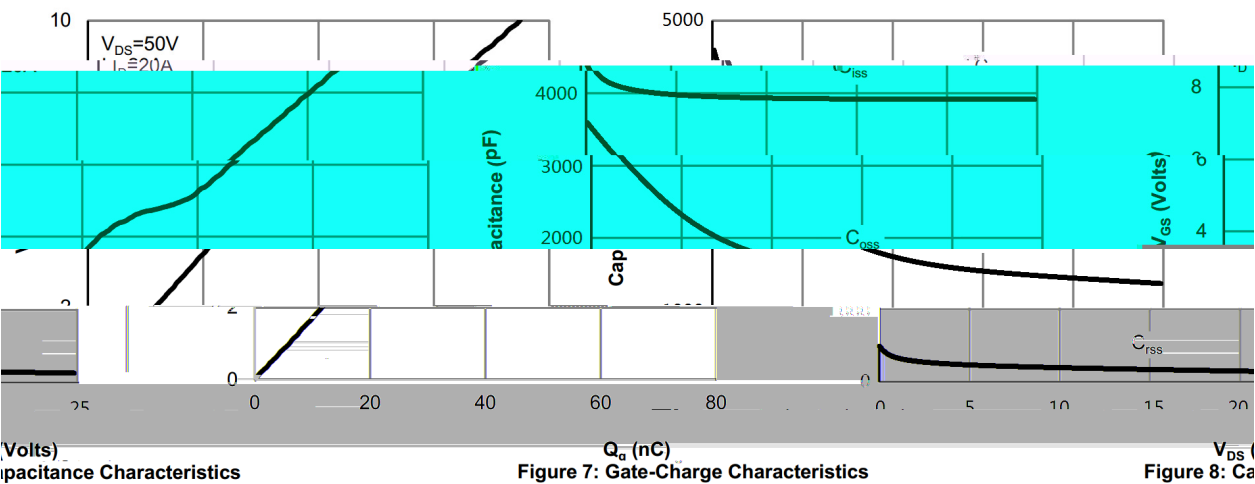


/ Package Dimensions

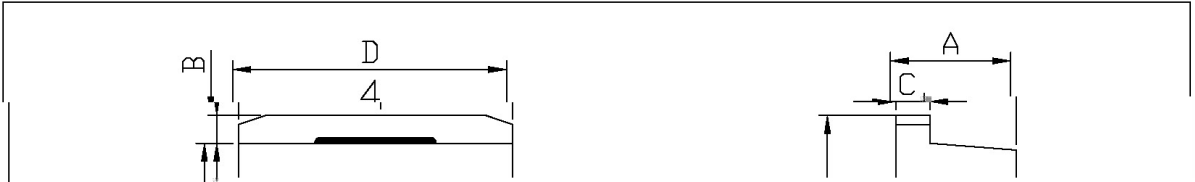

	Symbol	Dimension		Symbol	Dimension	
		Min	Max		Min	Max
	A	4.30	4.70	B	9.00	9.40
	b	1.00	1.40	e1	2.24	2.74
20	b1	0.70	0.90	e2	4.88	5.28
00	b1	1.15	1.35	L1	15.00	16.00
4	b2	0.40	0.60	L2	2.24	2.90
60	C	1.20	1.40	L3	1.20	1.40
	D	9.80	10.20			
TP-263						

/ Marking Instructions

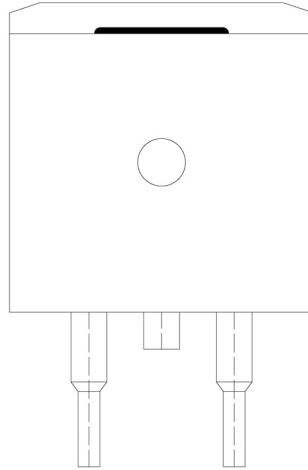

BR

055N10SH

$\pm$ $\pm$

封装形式	包装数量					包装尺寸 :		
	Units/Reel 只/卷盘	Reels/Inner Box 卷盘/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Reel	Inner Box 盒	Outer Box 箱

封装形式	包装数量					包装尺寸 :		
	Units/Tube 只/套管	Tubes/Inner Box 套管/盒	Units/Inner Box 只/盒	Inner Boxes/Outer Box 盒/箱	Units/Outer Box 只/箱	Tube 套管	Inner Box 盒	Outer Box 箱

8 8