

/ Descriptions


/ Features

$\leq$	Ω	Ω
$\leq$	Ω	Ω


/ Applications

EPV

/ Equivalent Circuit



/ Pinning

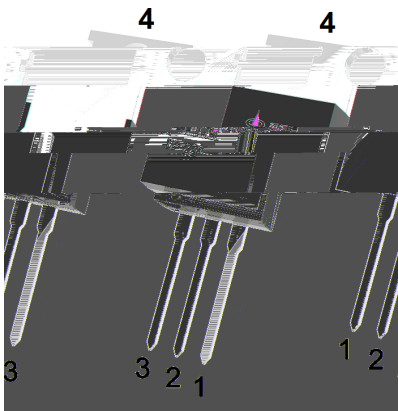

/ Marking




			±	
	≤	θ		3/8
		θ		

		μ				
						μ
					±	
		μ				
						Ω
						Ω



/ Electrical Characteristics(Ta=25)

		Ω Ω				

/ Electrical Characteristic Curve

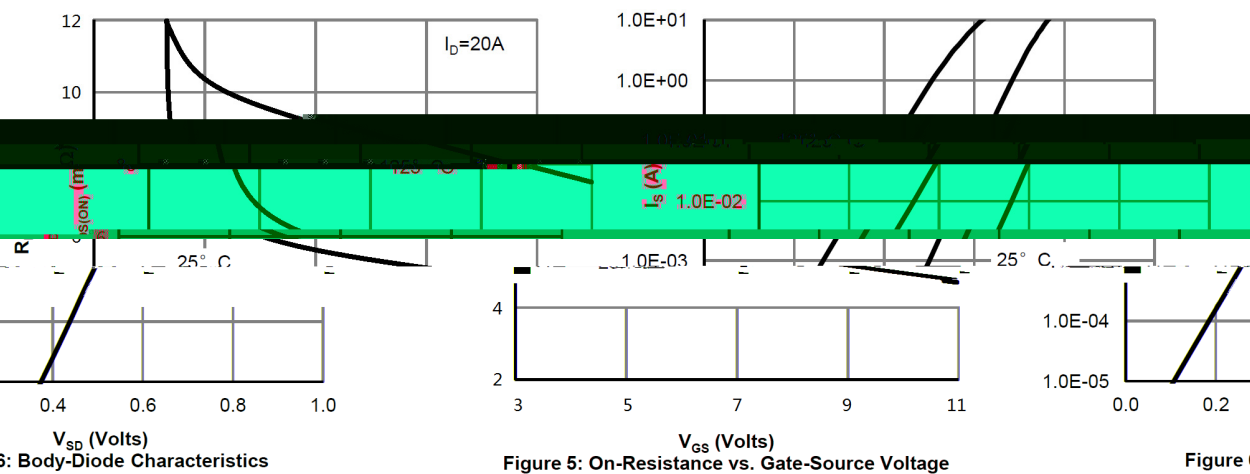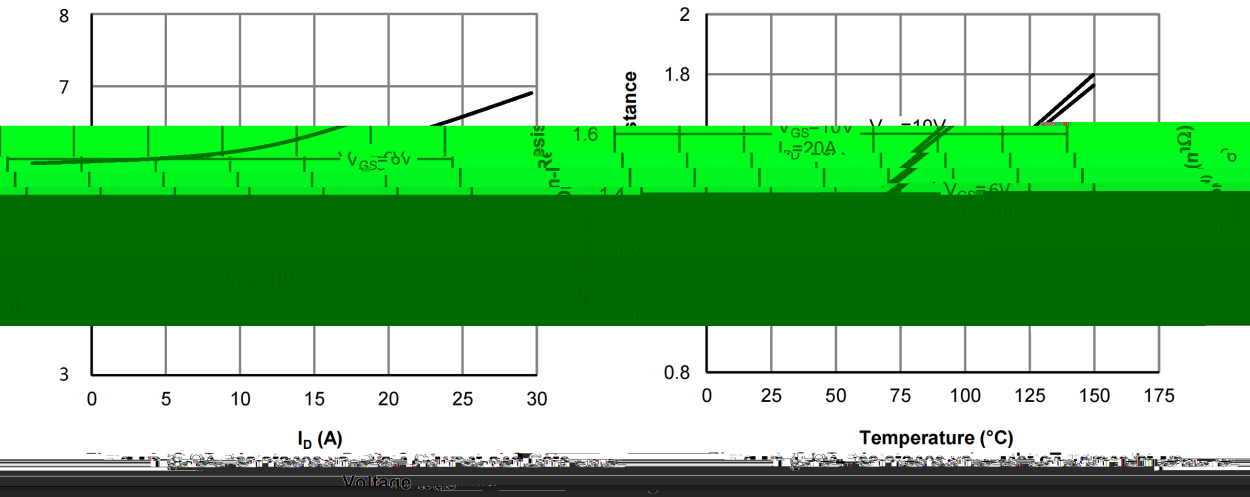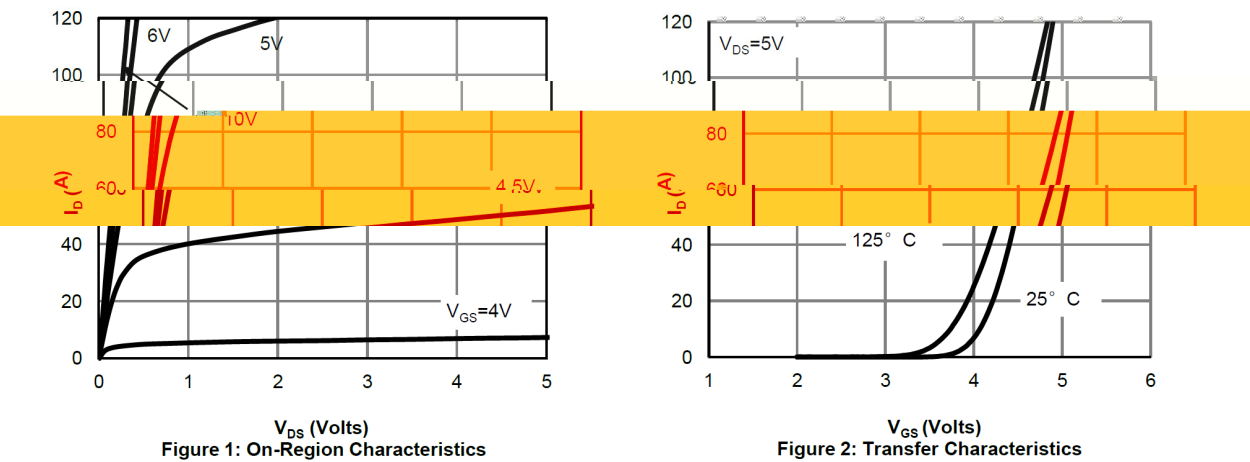


/ Electrical Characteristic Curve

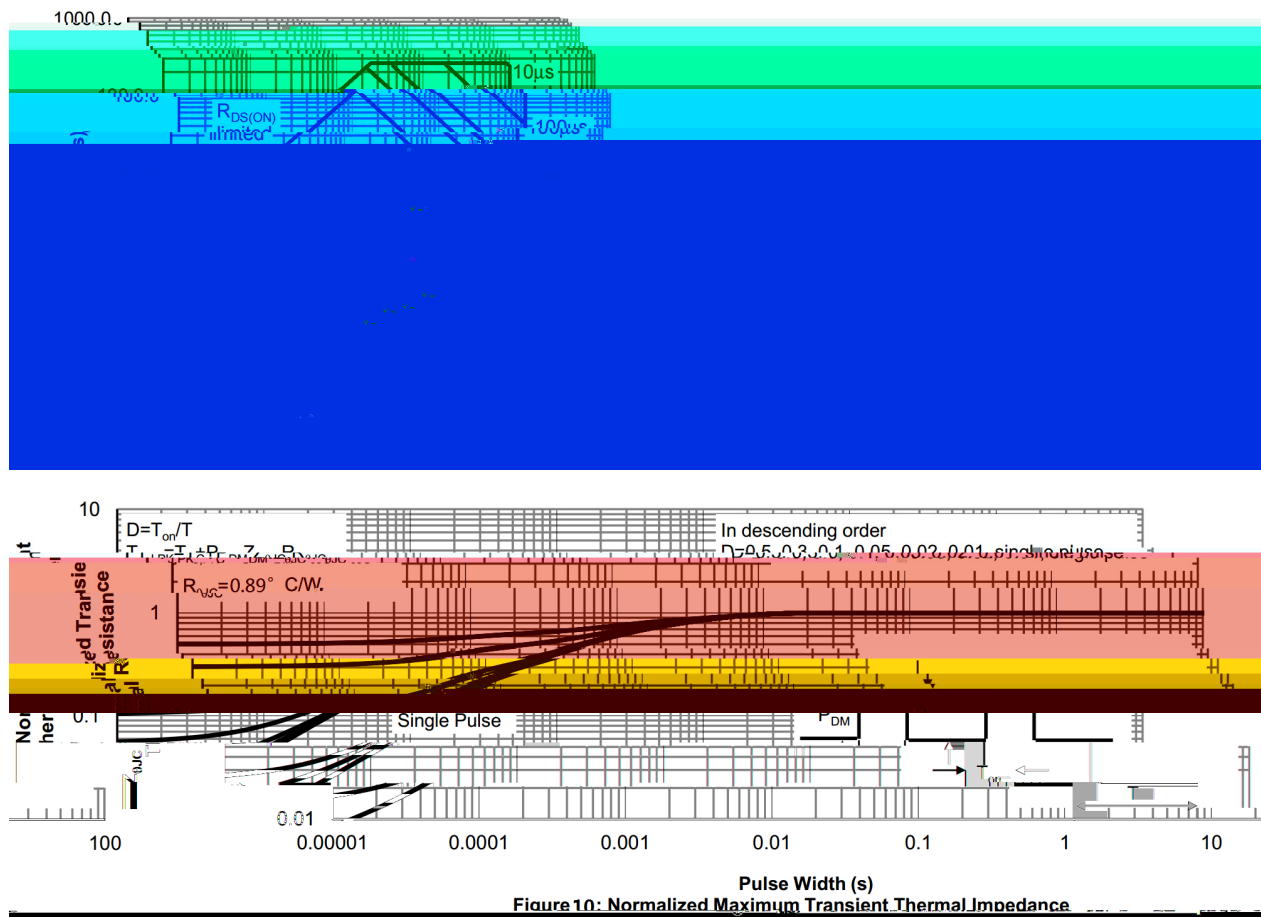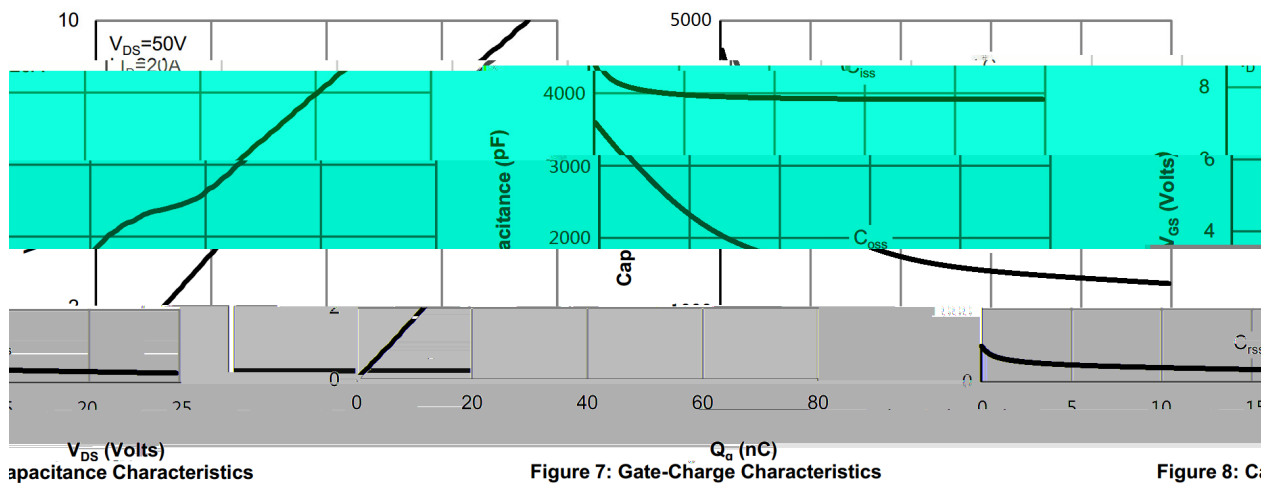

/ Package Dimensions


T0-220

单位: mm

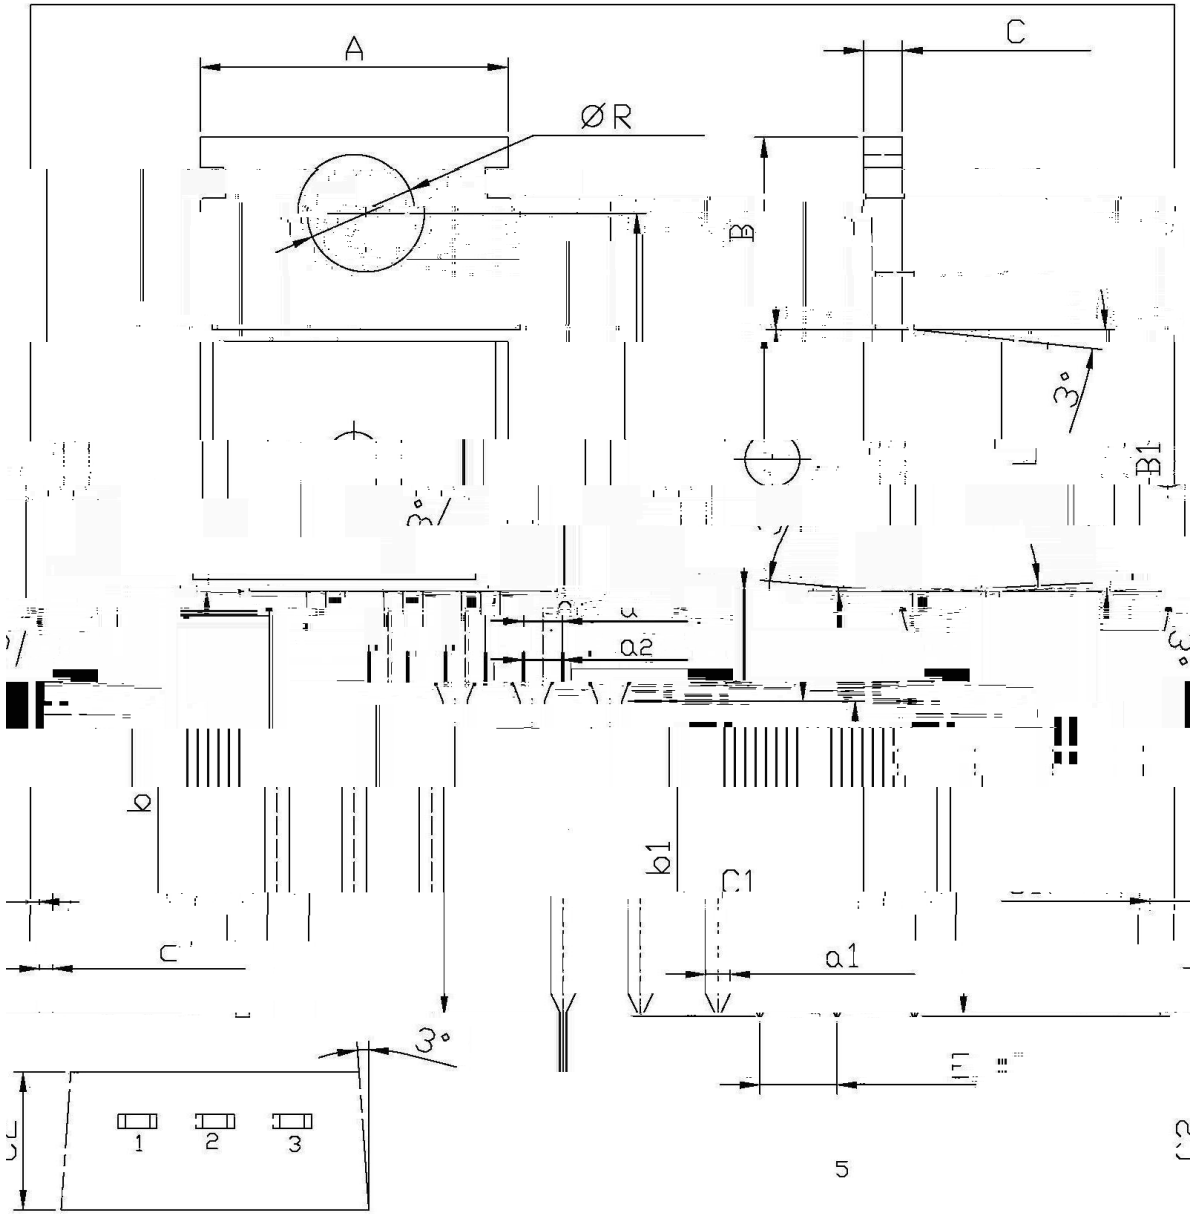

Dimensions In Millimeters				Dimensions In Millimeters			
Symbol	Min	Max		Symbol	Min	Max	
A	9.8	10.2		C	1.2		
R	3.56	3.64		B	6.3		
	15.7	16.1		B1	9.0		
a	12.6	13.6		C1	2.2		

/ Marking Instructions

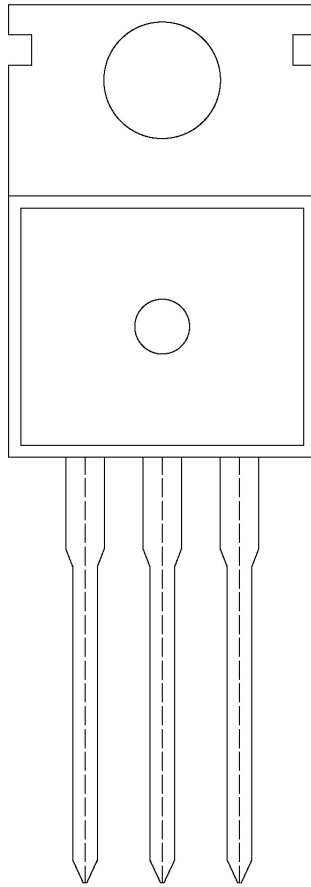

EU
388Q43VK

() / Temperature Profile for Dip Soldering(Pb-Free)

3/8

2

3/8

2

3/8

2

3/8

2

3/8

2

3/8

2

/ Resistance to Soldering Heat Test Conditions

2

3/8

2

/ Packaging SPEC.

	Units/Bag /	Bags/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Bag	Inner Box	Outer Box

Ⓟ.