
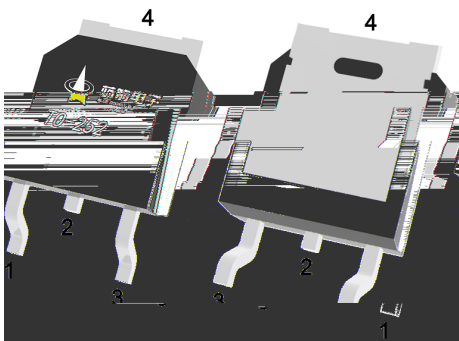


$$\begin{matrix} \leq & \Omega & \Omega \\ \leq & \Omega & \Omega \end{matrix}$$

DC/DC



		θ		
		θ		

					$\pm$	
						Ω
						Ω
						Ω



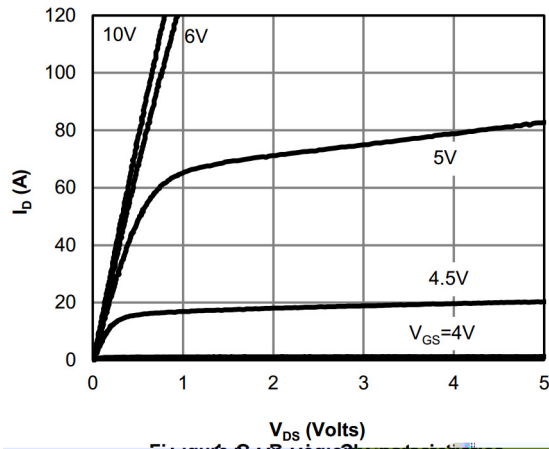


Figure 1: Drain Current vs. Drain-Source Voltage

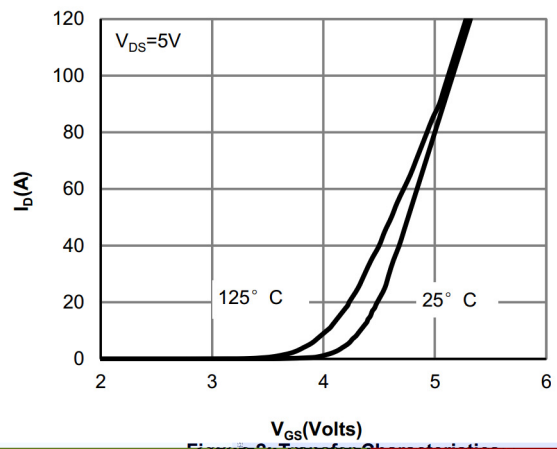


Figure 2: Transfer Characteristics

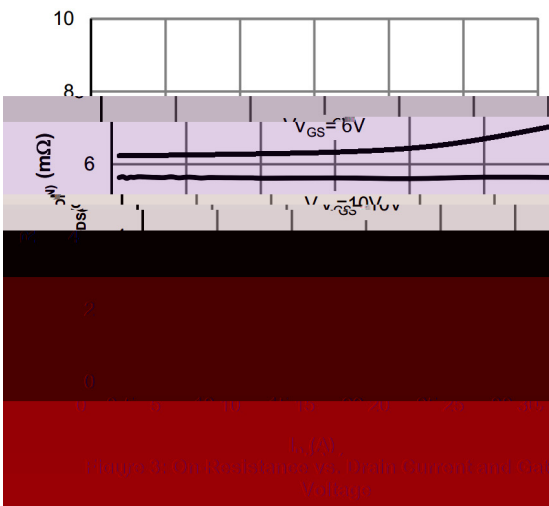


Figure 3: On-Resistance vs. Drain Current and Gate Voltage

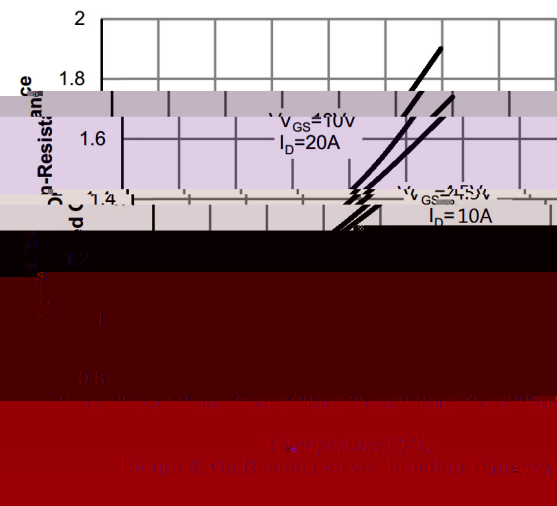


Figure 4: On-Resistance vs. Drain Current and Gate Voltage

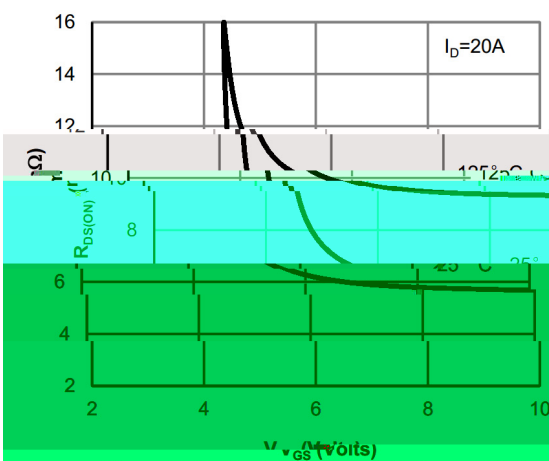


Figure 5: On-Resistance vs. Gate-Source Voltage

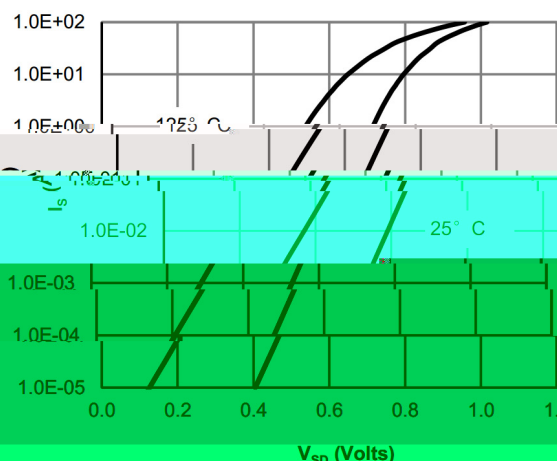


Figure 6: Body-Diode Characteristics





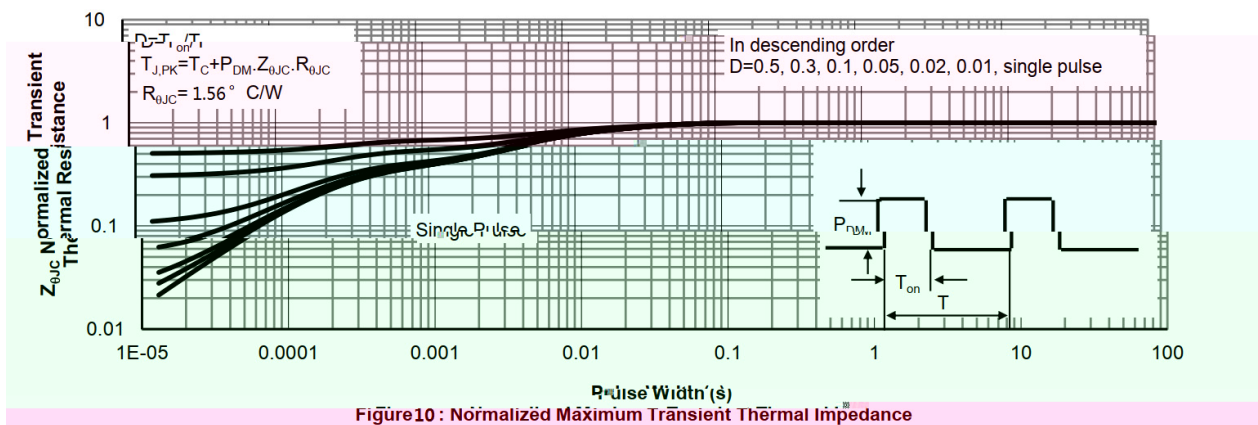


Figure10 : Normalized Maximum Transient Thermal Impedance

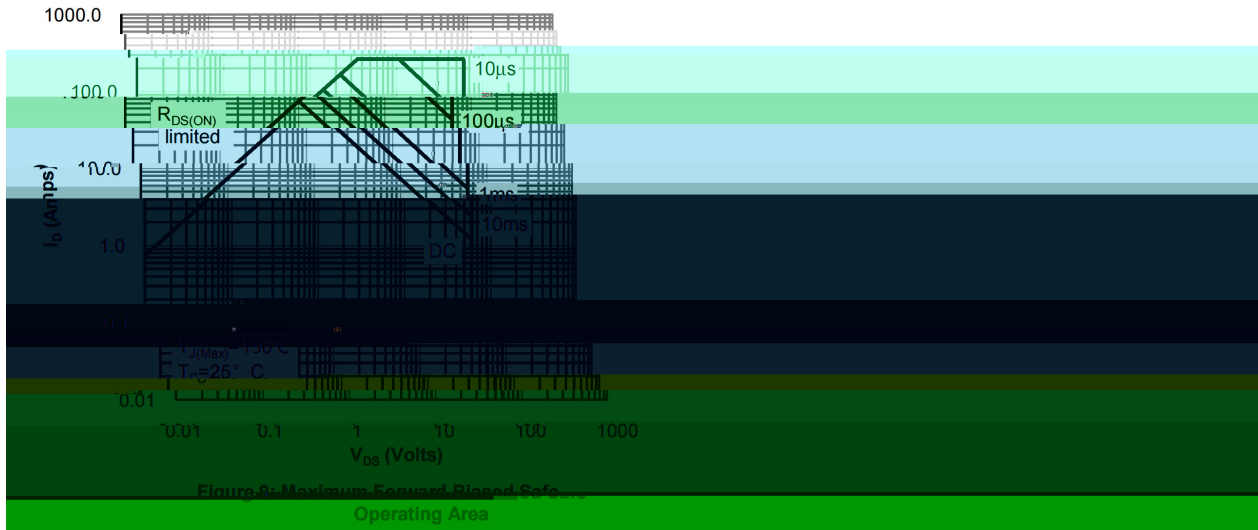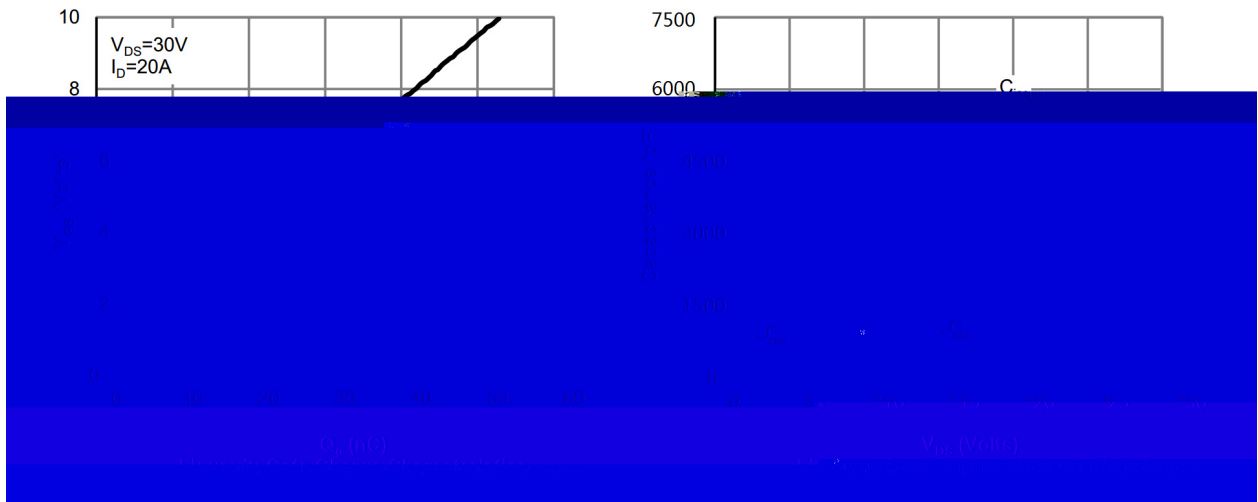

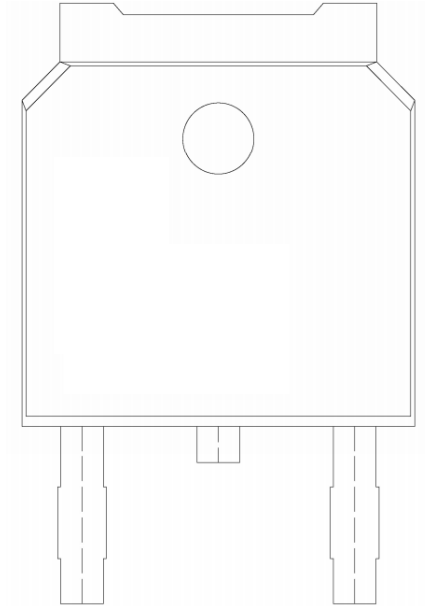

$\pm$ $\pm$ $\pm$ $\pm$



$\pm$ $\pm$

