

/ Descriptions

PDFN3×3A-8L P MOS

x

/ Features

±


≤ Ω Ω

≤ Ω Ω


/ Applications

/

/ Equivalent Circuit



/ Pinning

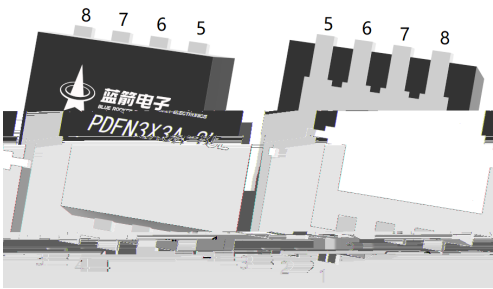

出脚	定义
Pin1	S
Pin2	S
Pin3	S
Pin4	G
Pin5	D
Pin6	D
Pin7	D
Pin8	D

/ Marking

/ Absolute Maximum Ratings(Ta=25)

			±	
	≤	θ		℃
		θ		




/ Electrical Characteristics(Ta=25)

		μ				
					±	
		μ				
						Ω
						Ω



/ Electrical Characteristics(Ta=25)

		Ω Ω				

/ Electrical Characteristic Curve

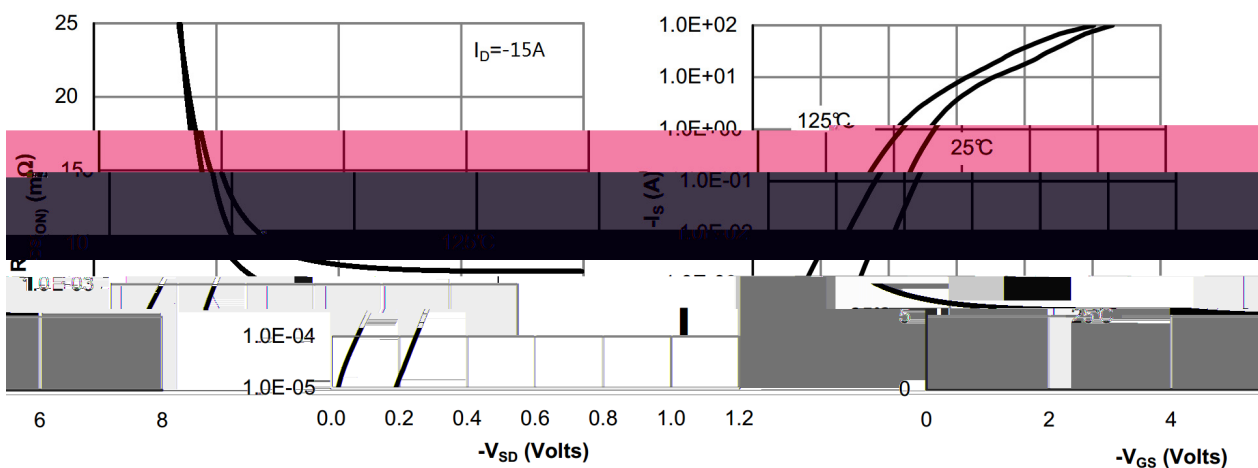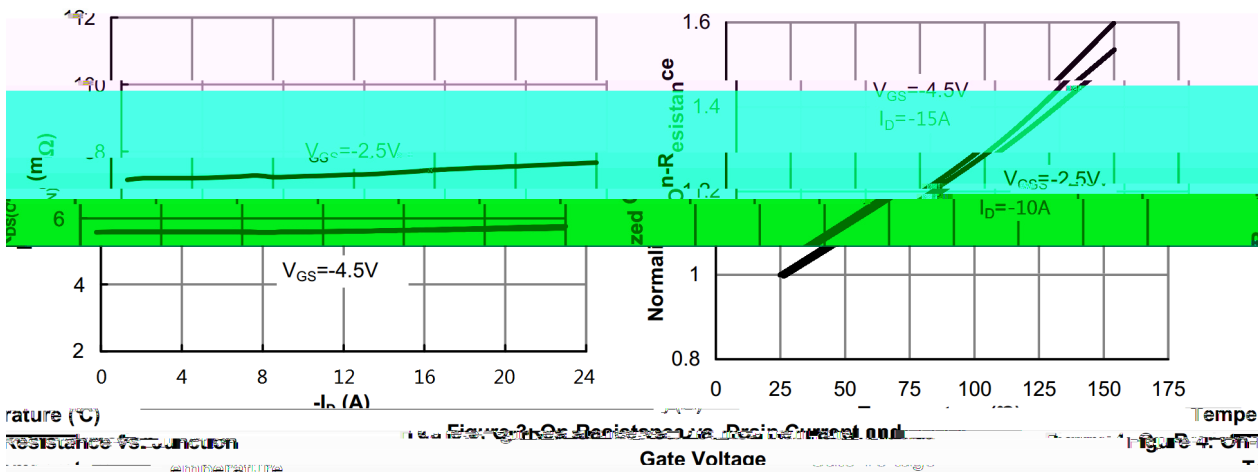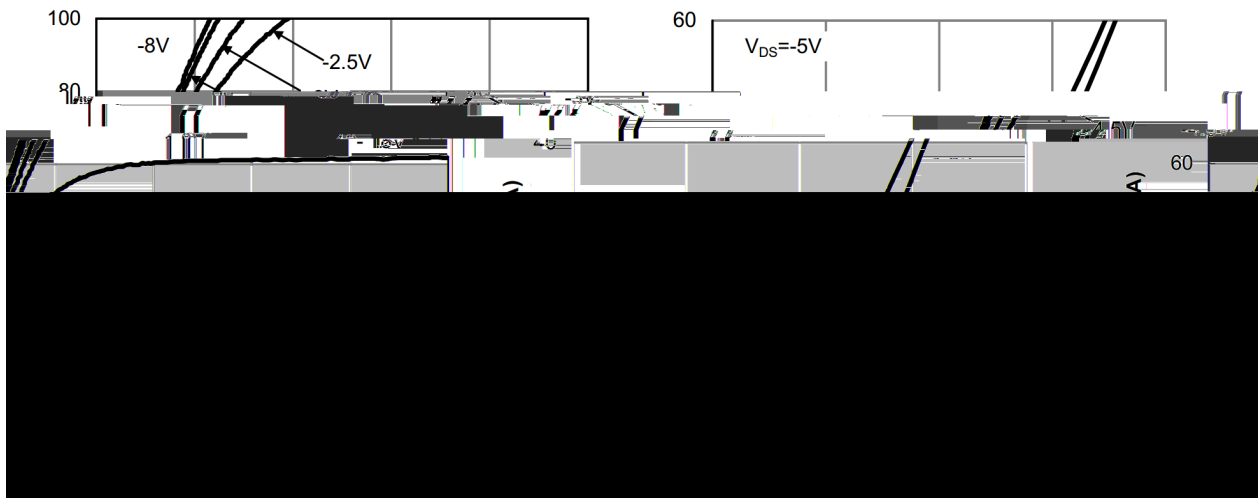


Electrical Characteristic Curve

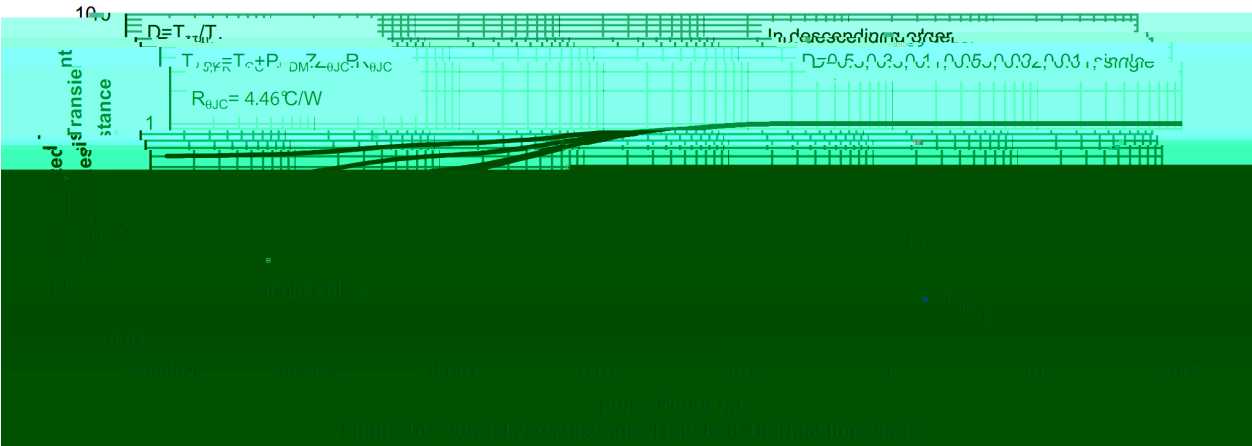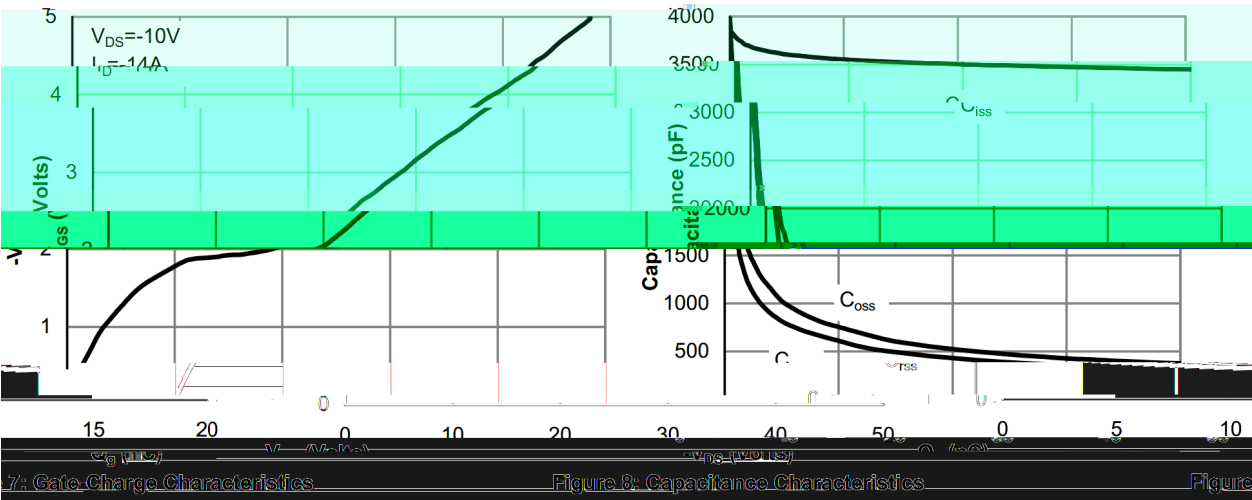

/ Package Dimensions


PDFN3X3A-8L


Unit:mm

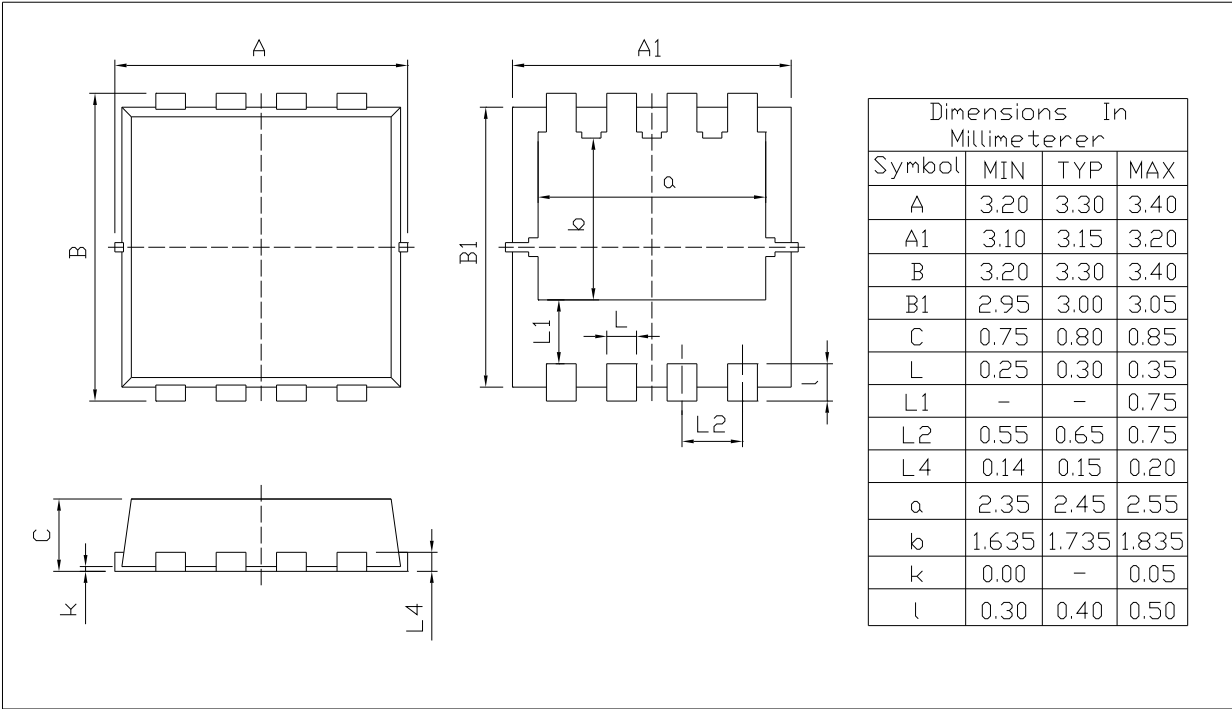

Rev.00 202011

/ Marking Instructions

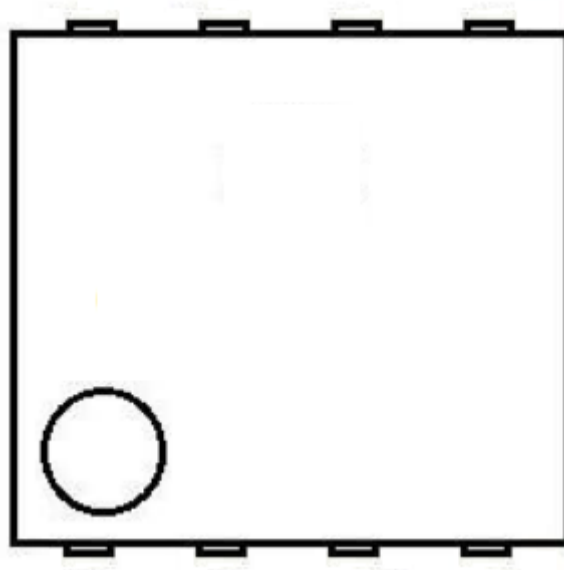

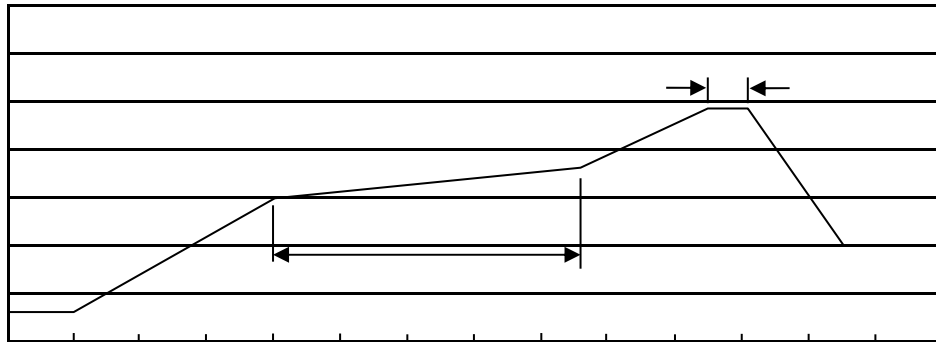 $\pm$

°C

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

8 8