
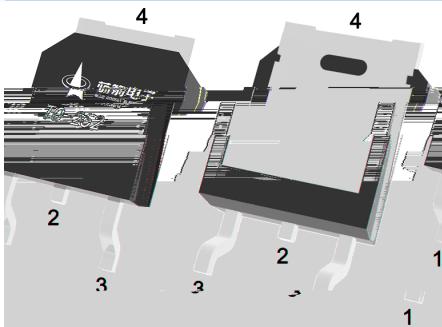


N

HF Product.

DC/DC



		θ		
		θ		

		μ				
						μ
						μ
		μ				
						Ω
						Ω
						Ω



		Ω Ω				

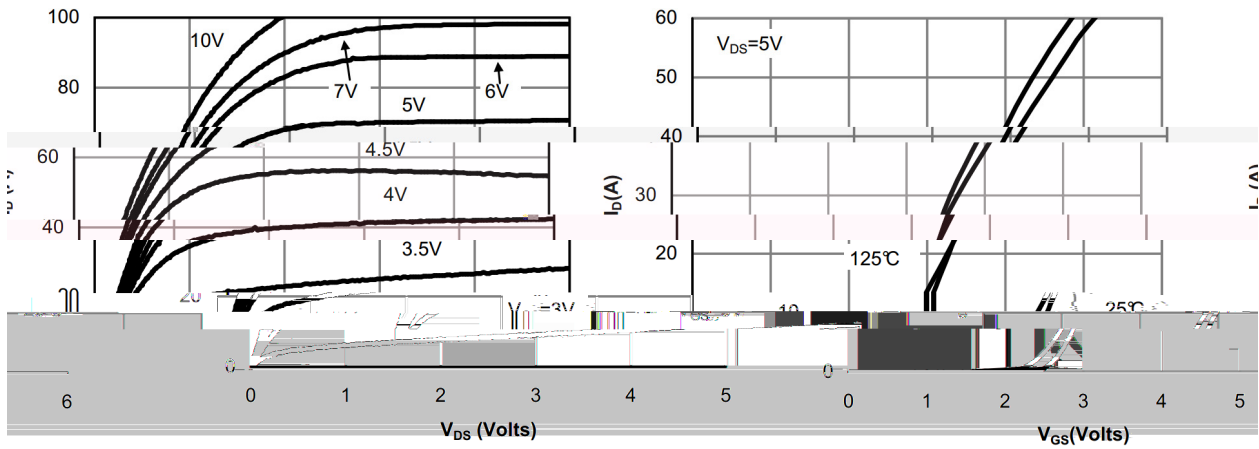


Fig 1: On-Region Characteristics

Figure 2: Transfer Characteristics

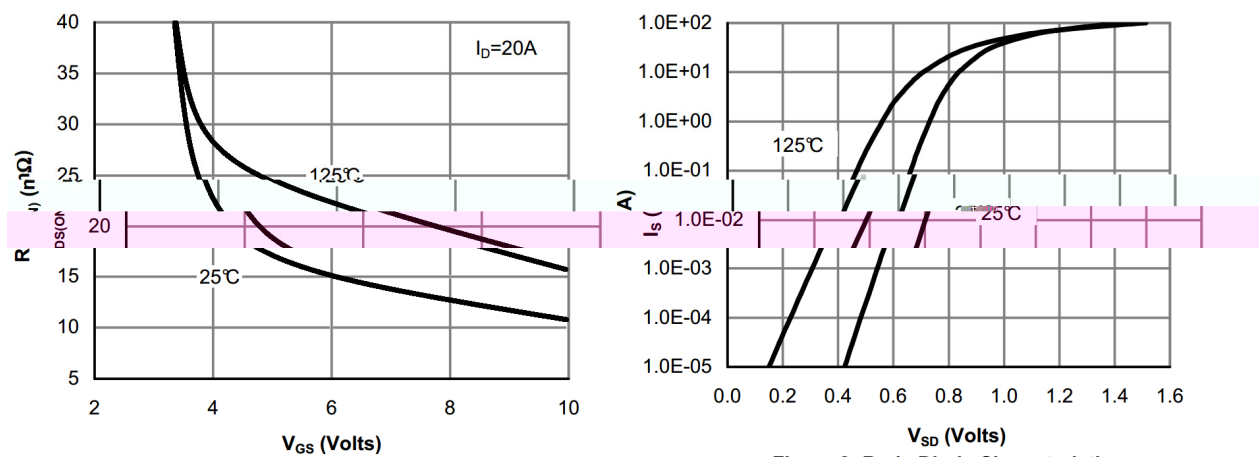
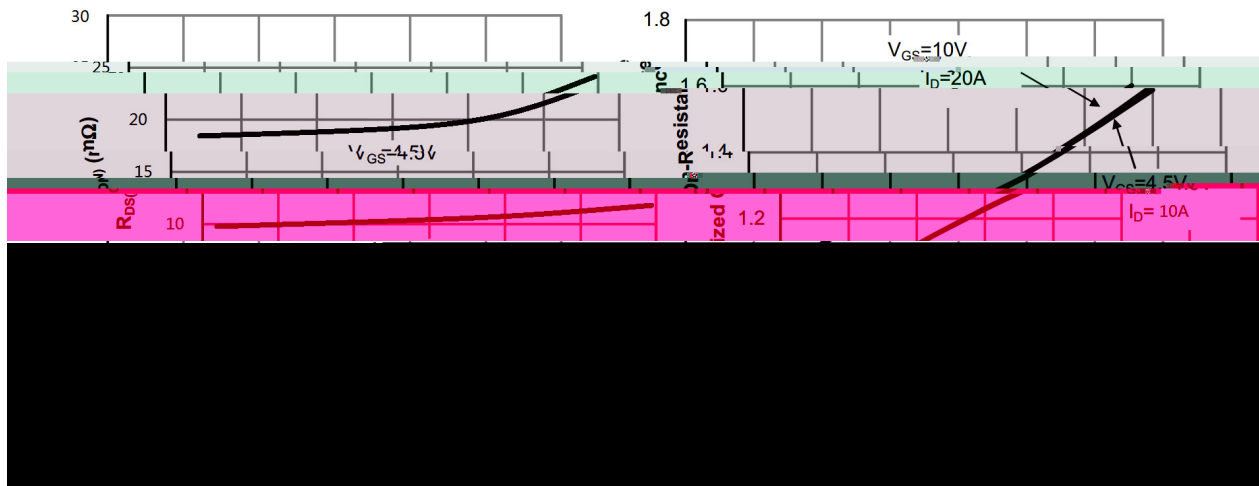


Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics





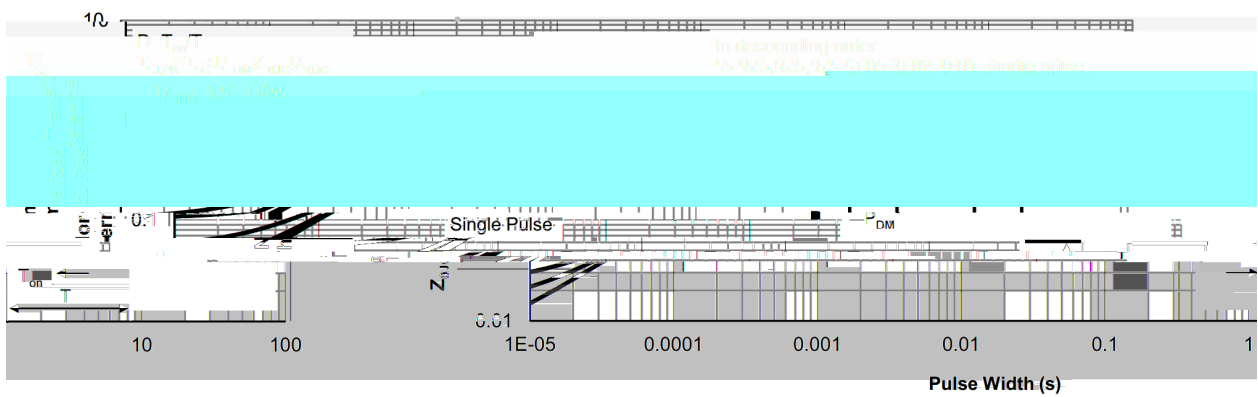


Figure 10: Normalized Maximum Transient Thermal Impedance

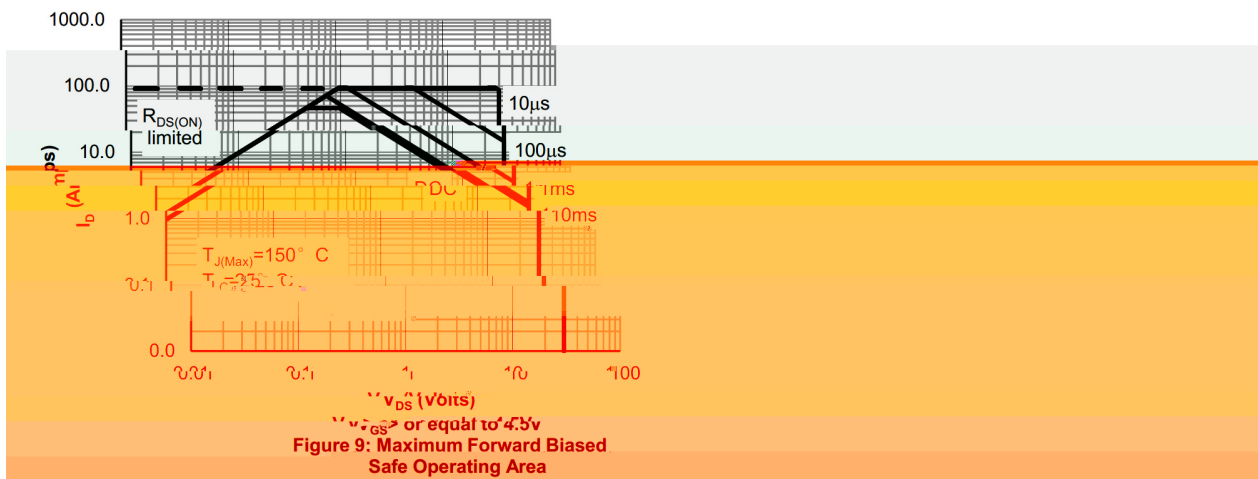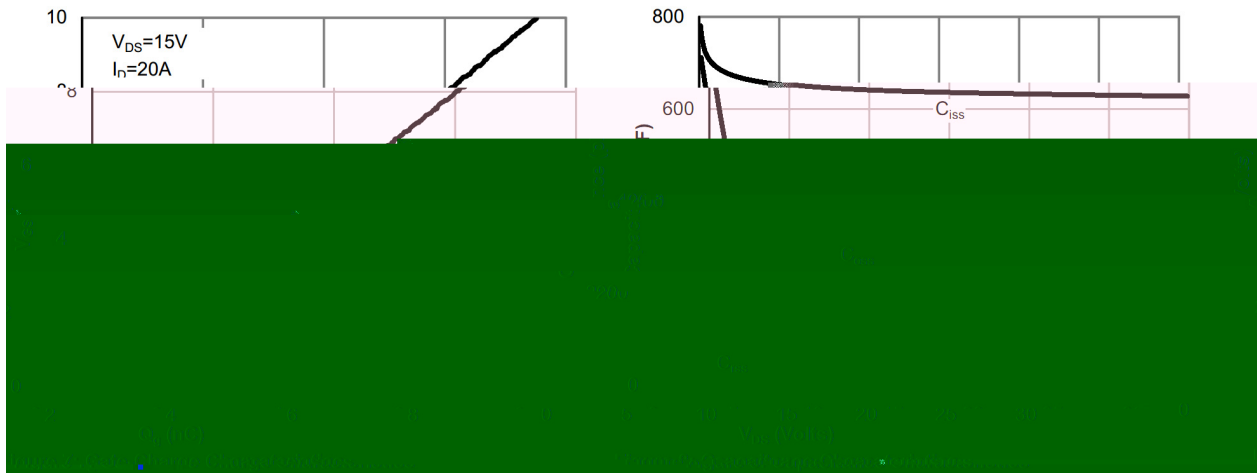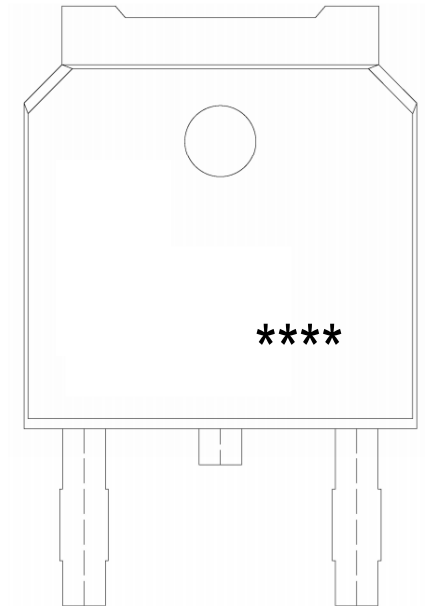

BR

120N03

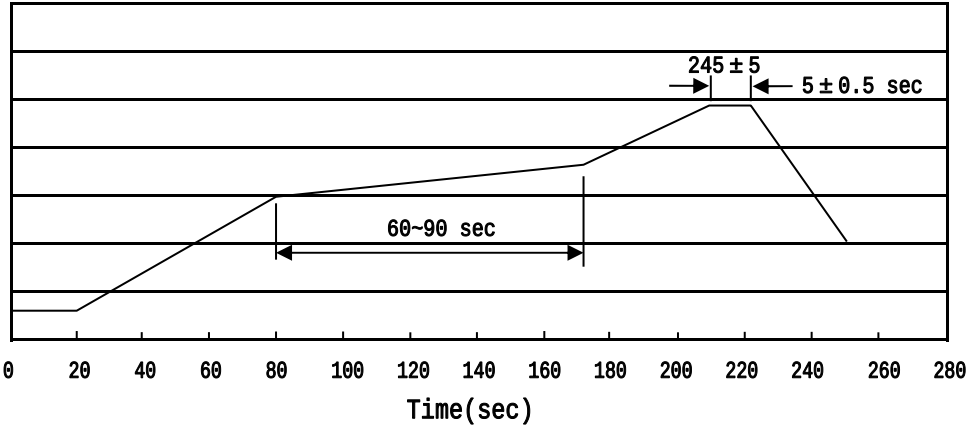

± ± ± ±

± ±

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box
TO-252	2,500	2	5,000	6	30,000	13 ×16	360×360×50	380×335×366

	Units/Tube /	Tubes/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Tube	Inner Box	Outer Box
TO-251/252	75	48	3,600	5	18,000	526×20.5×5.25	555×164×50	575×290×180