

x

x

$\leq$	Ω	Ω
$\leq$	Ω	Ω



			±	
	≤	θ		



		μ				
						μ
					±	
						Ω
						Ω
		ΩΩ				

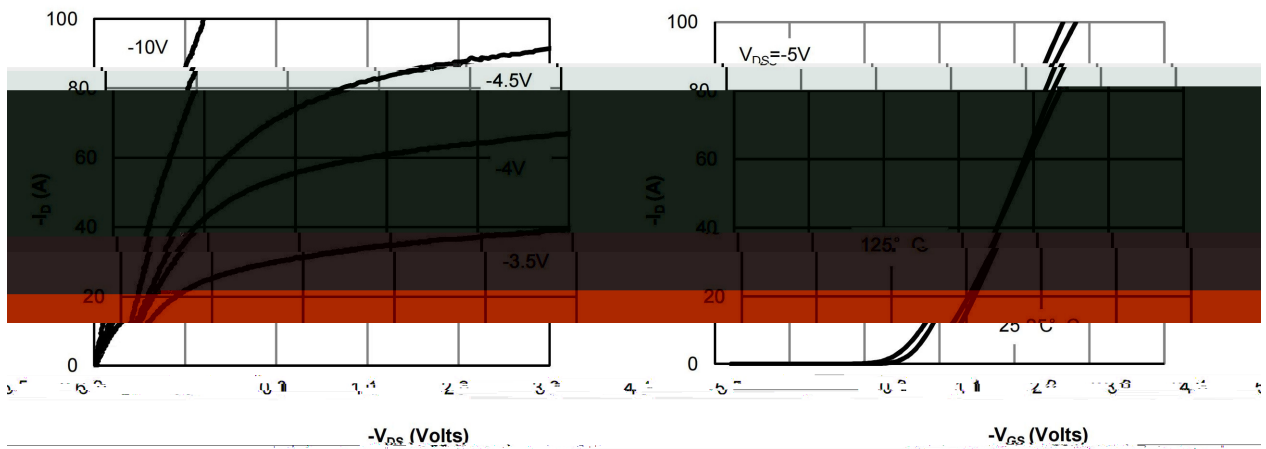


Figure 1: On-Region Characteristics

Figure 2: Transfer Characteristics

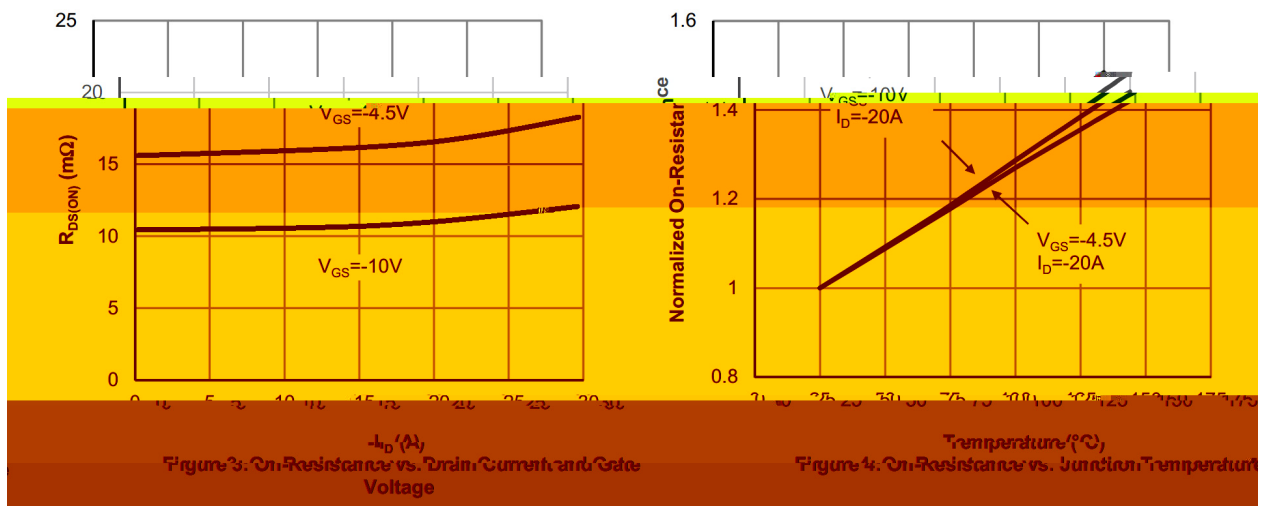


Figure 3: On-Resistance vs. Drain Current

Figure 4: Normalized On-Resistance vs. Drain Current




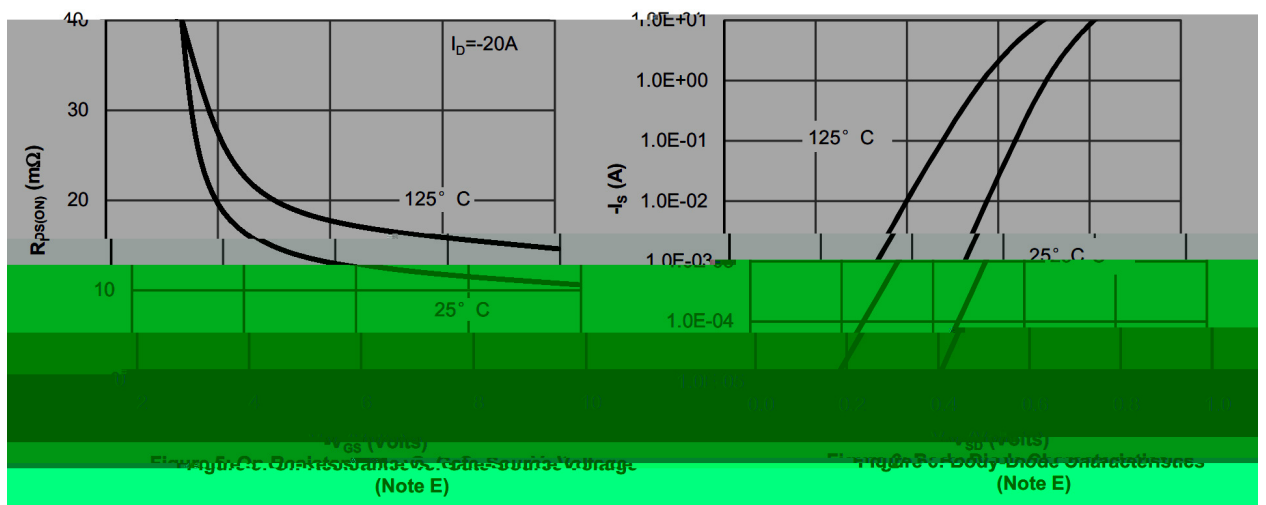



Figure 5: On-Resistance vs. Drain Current (Note E)

Figure 6: On-Resistance vs. Drain Current (Note E)

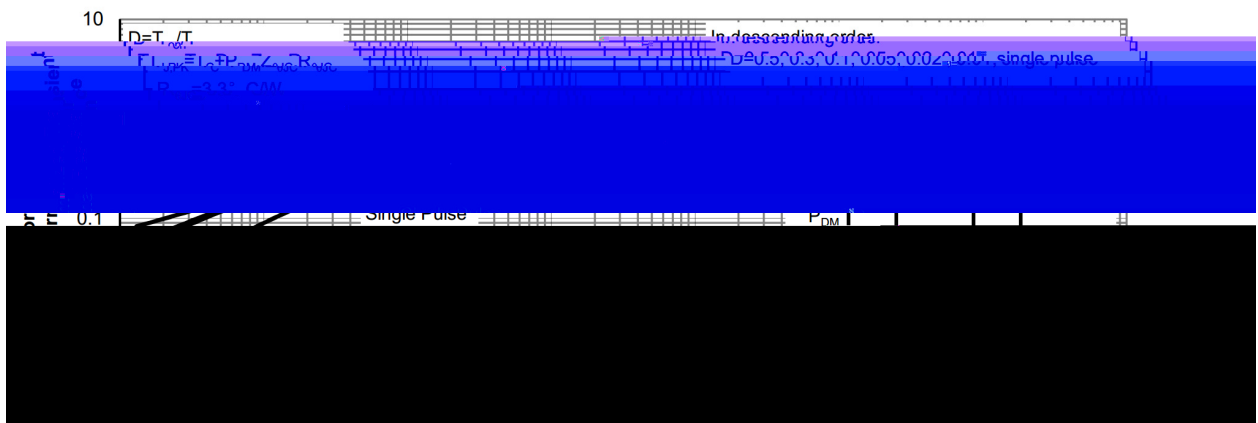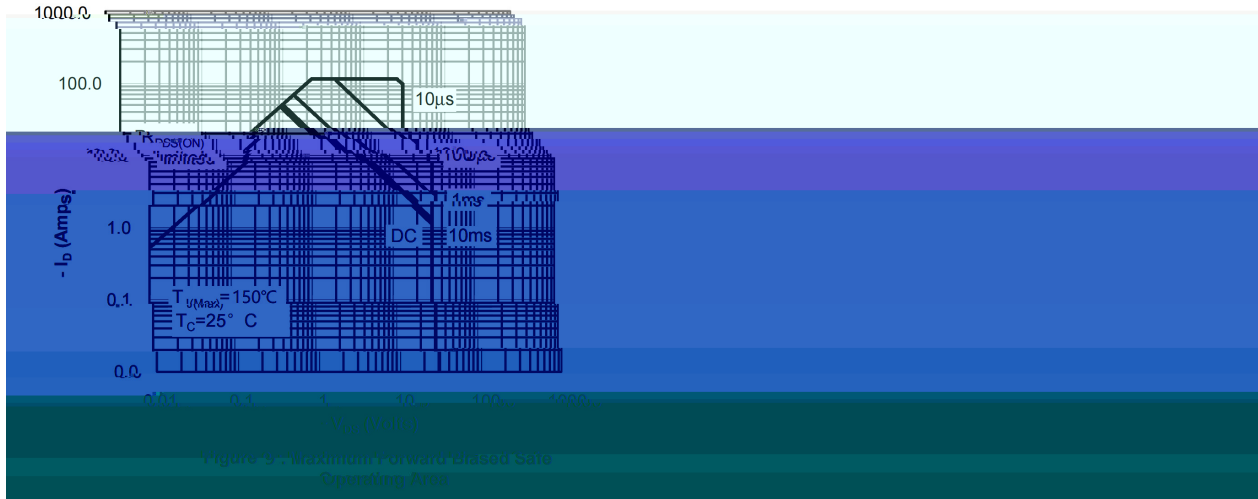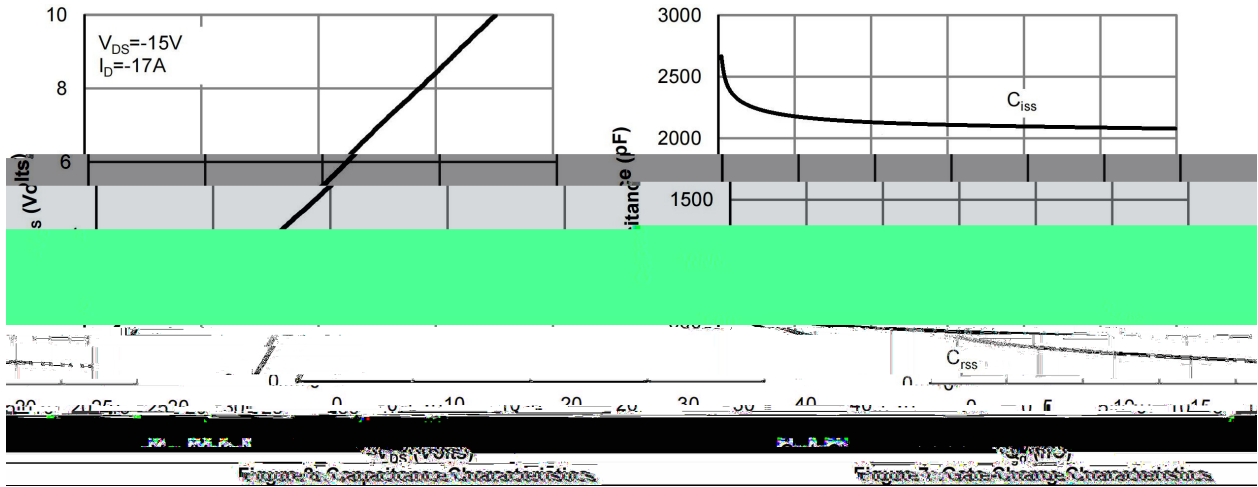


PDFN5 X6

Unit:mm

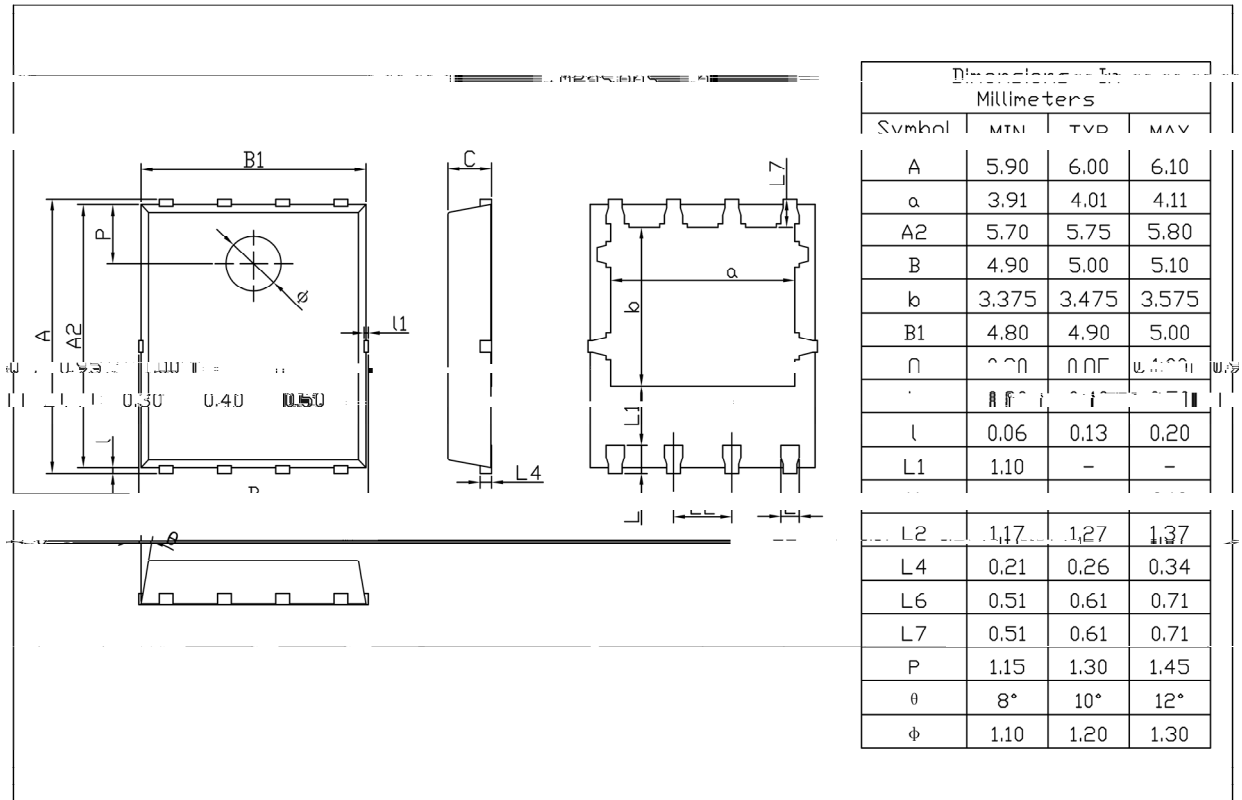

Rev.01 202209

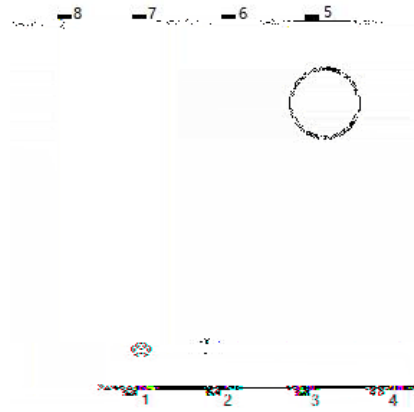

Temperature Profile for IR Reflow Soldering(Pb-Free)

±

±

±

±

±

±

/

/

/

/