


/ Descriptions

/ Features


$\leq$
 $\leq$

/ Applications

/ Equivalent Circuit



/ Pinning

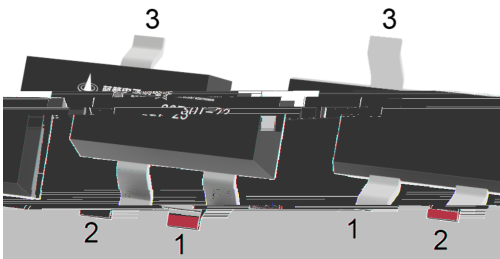

/ Marking




--	--

/ Absolute Maximum Ratings(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristics(Ta=25)

/ Electrical Characteristic Curve

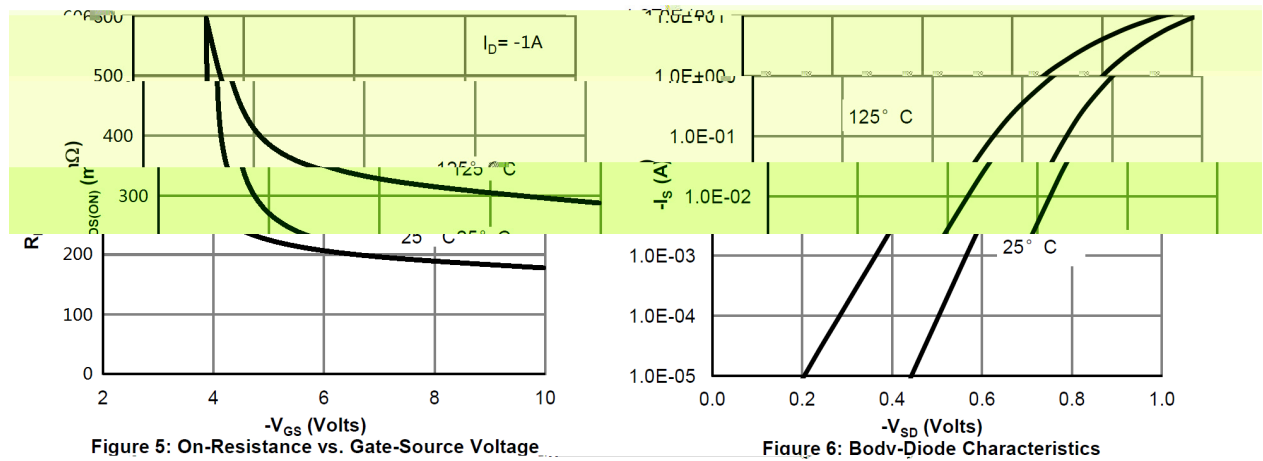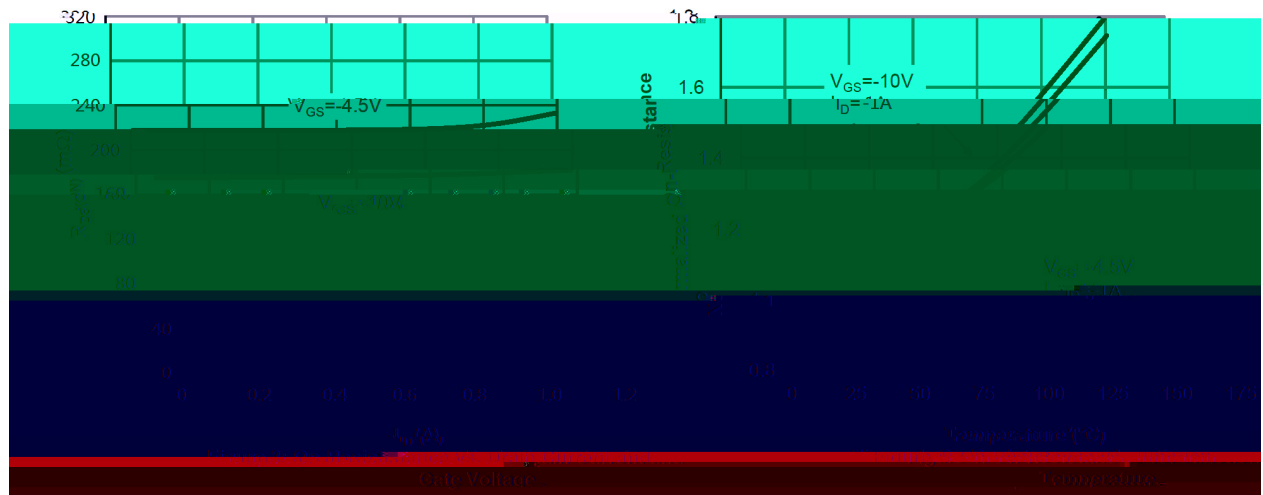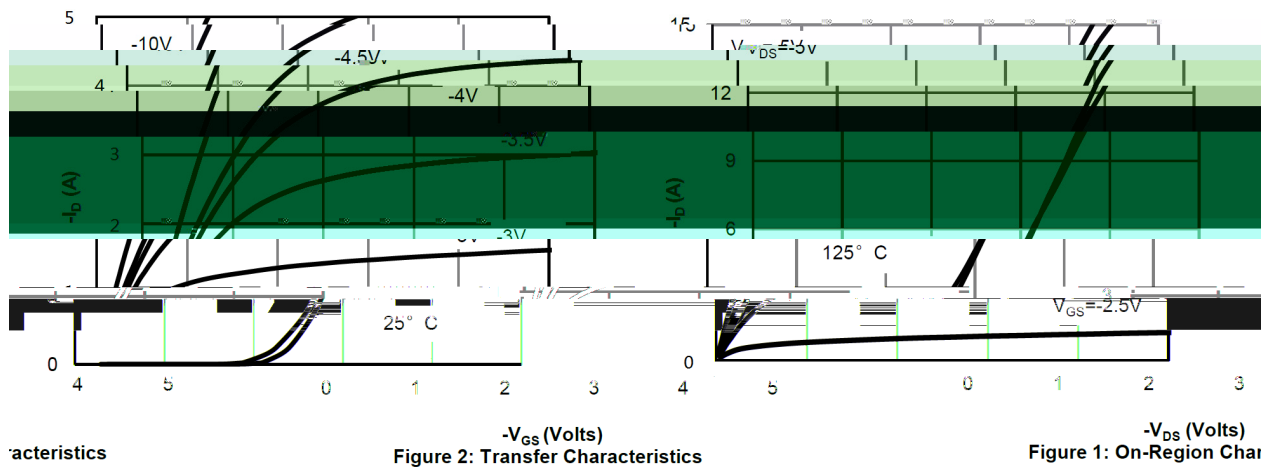

/ Electrical Characteristic Curve

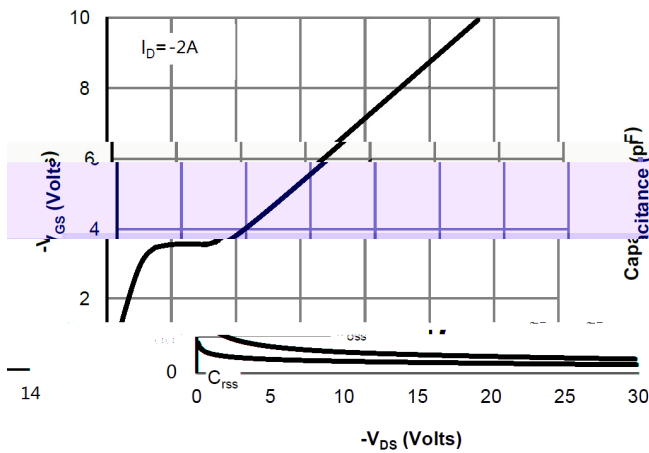


Figure 8: Capacitance Characteristics

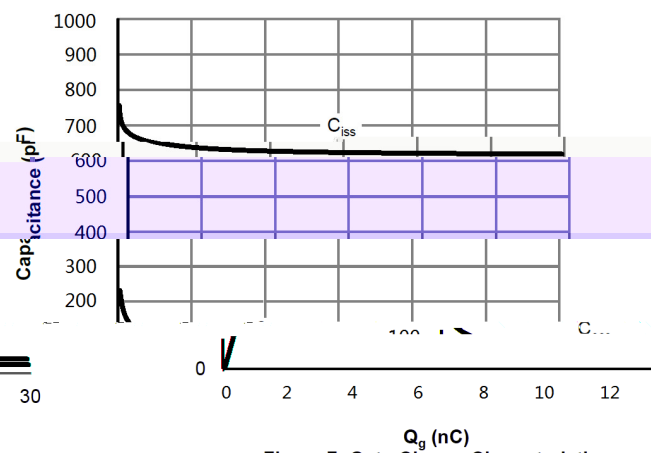


Figure 7: Gate-Charge Characteristics



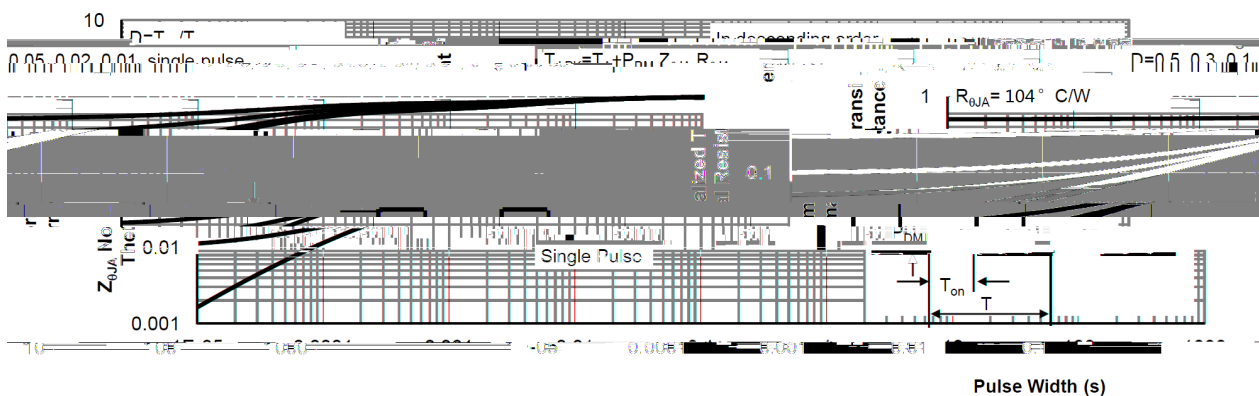


Figure 4.9: Maximum Temperature Theoretical


/ Package Dimensions

SOT-23

单位: mm

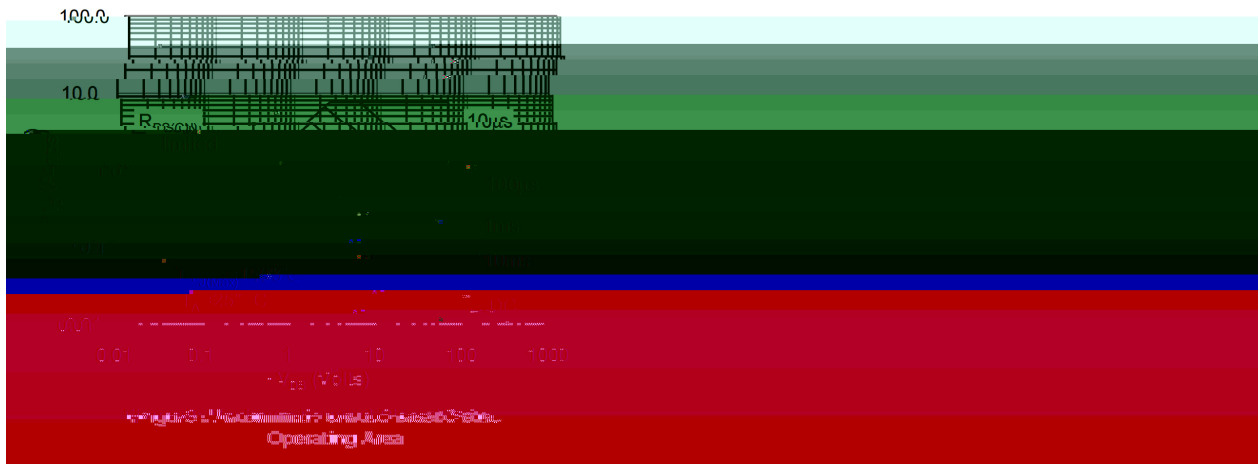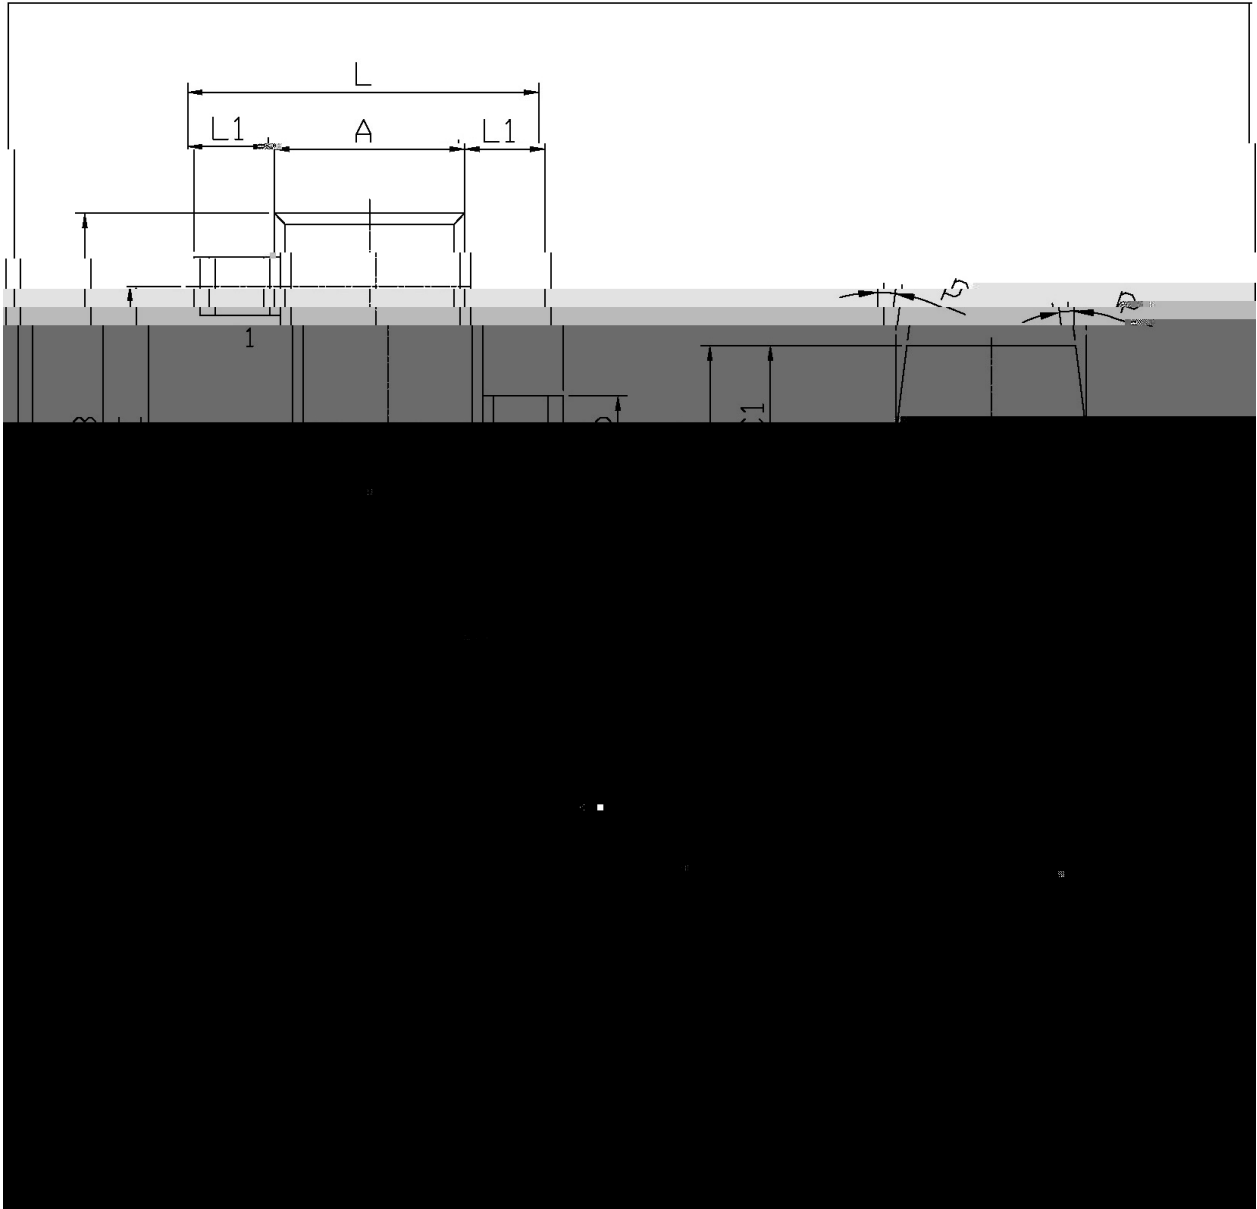

/ Marking Instructions

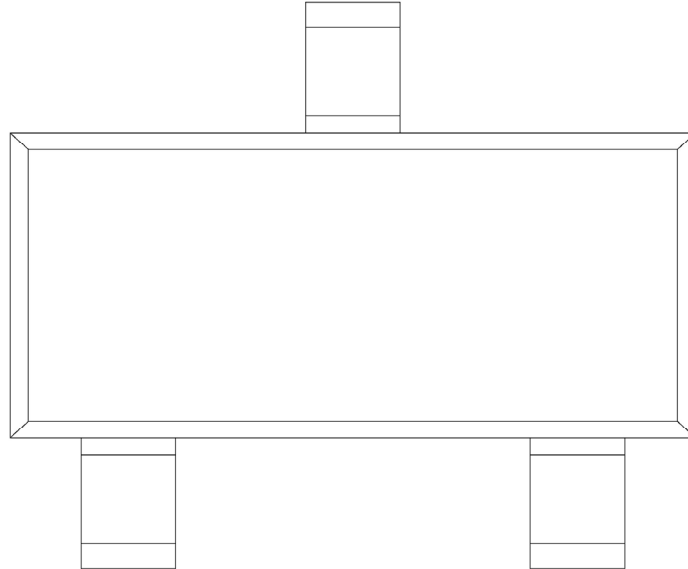

() /



/ Resistance to Soldering Heat Test Conditions

/ Packaging SPEC.

封装形式	包装数量					包装尺寸		
	只 卷盘	卷盘 盒	只 盒	盒 箱	只 箱		盒	箱

/ Notices