

/ Descriptions


PDFN3×3-8L P MOS
Double P-CHANNEL MOSFET in a PDFN3×3-8L Plastic Package.

/ Features


/ Applications

/


/ Equivalent Circuit



/ Pinning

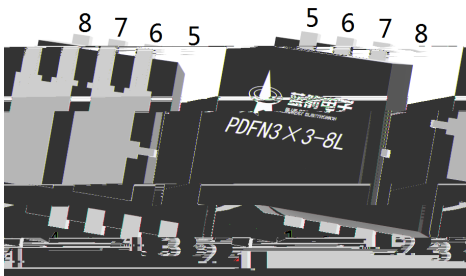

Top View



/ Marking




/ Absolute Maximum Ratings(Ta=25)

	θ		
	θ		





/ Electrical Characteristics(Ta=25)

						Ω
						Ω

/ Electrical Characteristic Curve

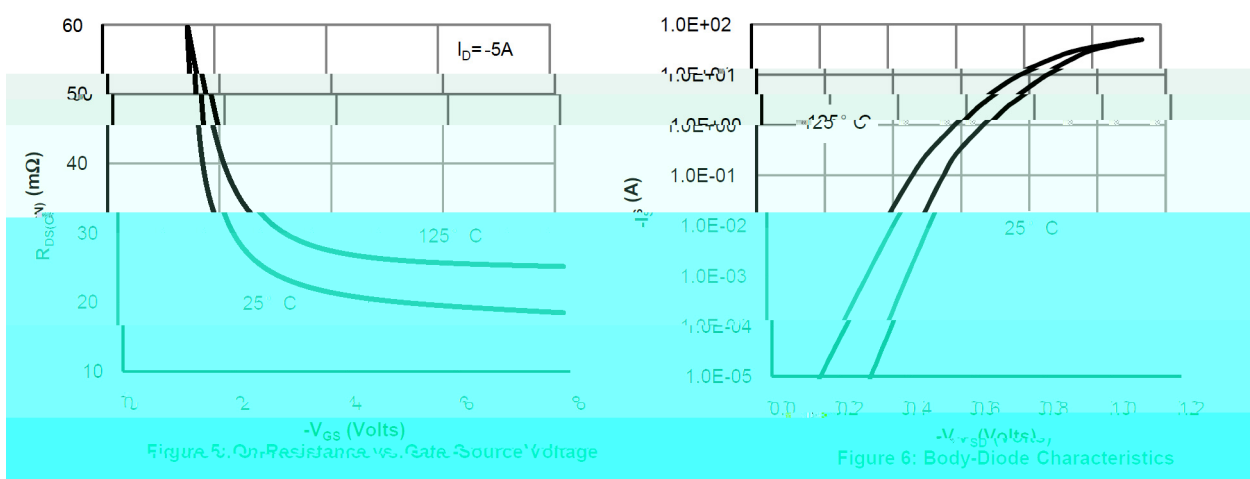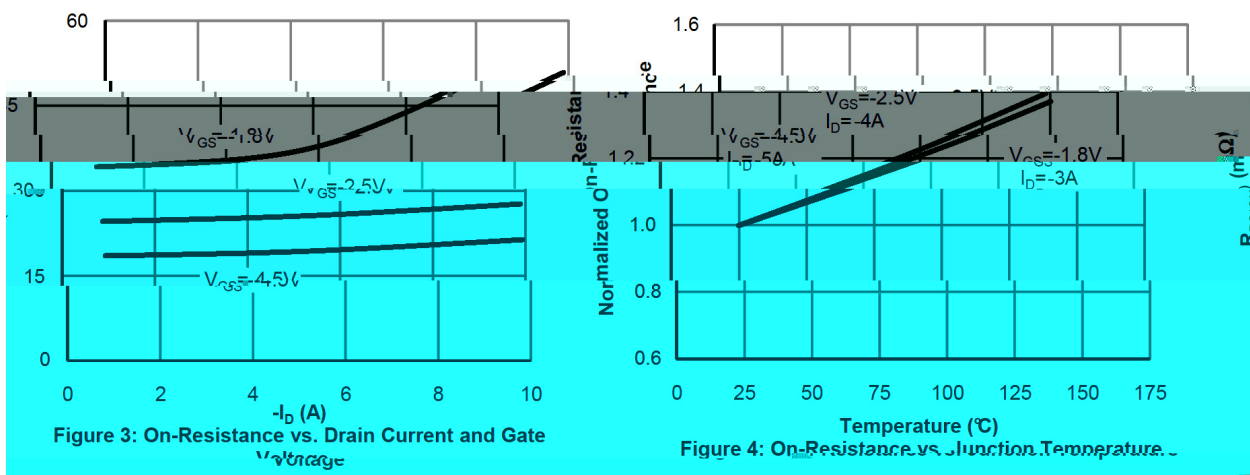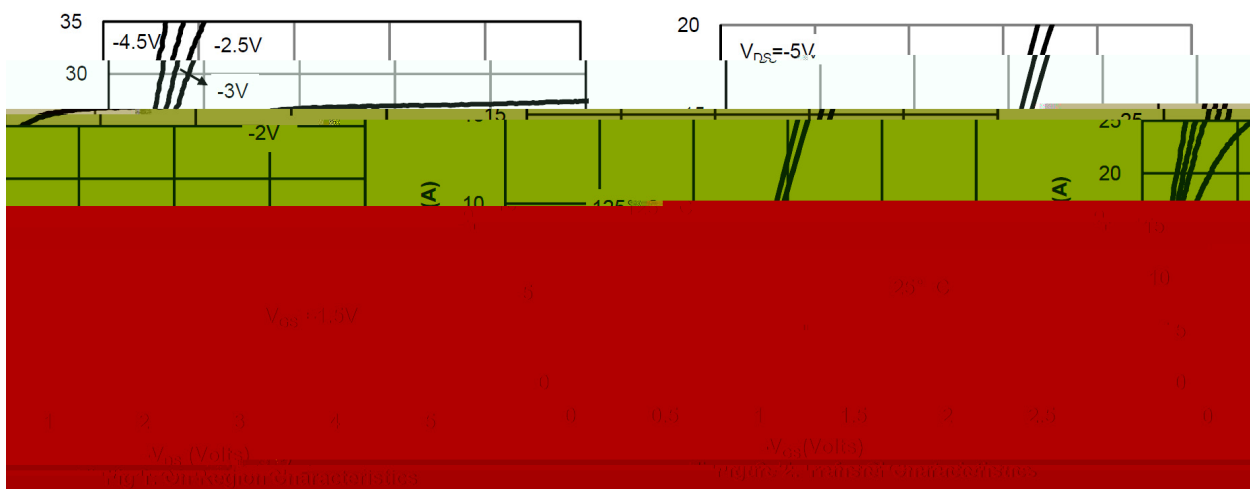


/ Electrical Characteristic Curve

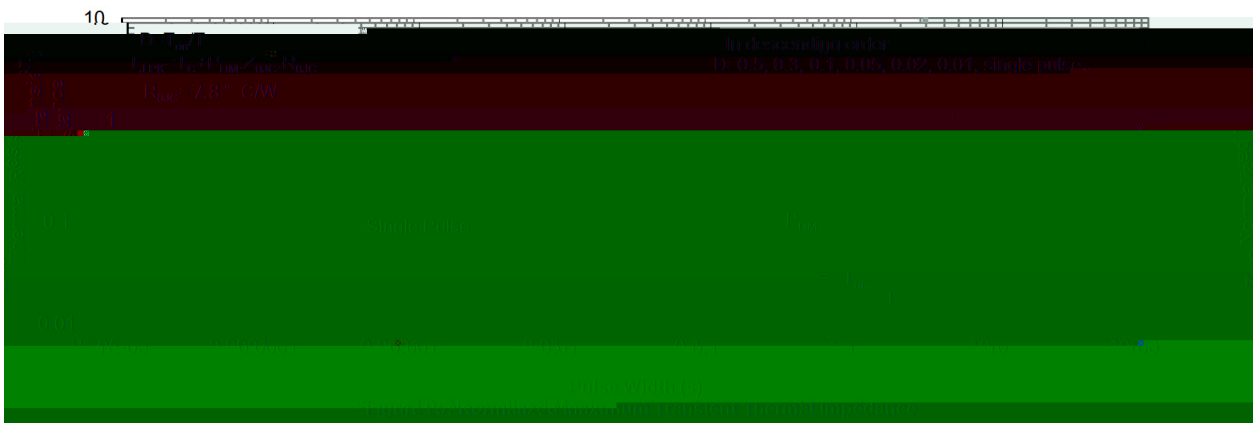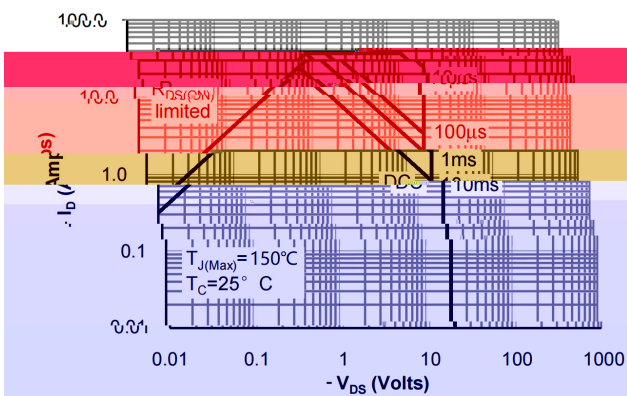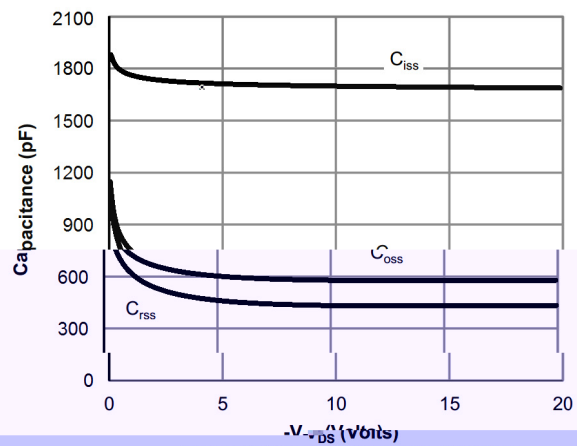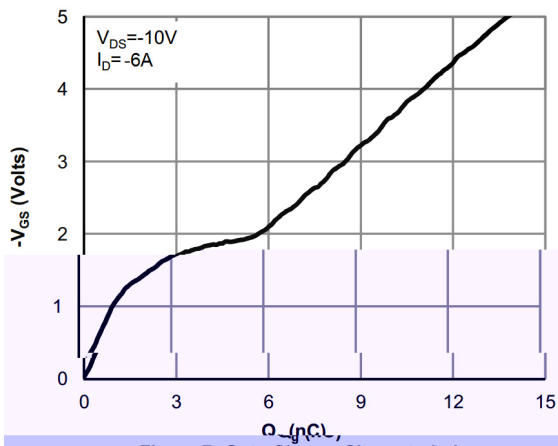

/ Package Dimensions


PDFN3X3-8L

Unit:mm

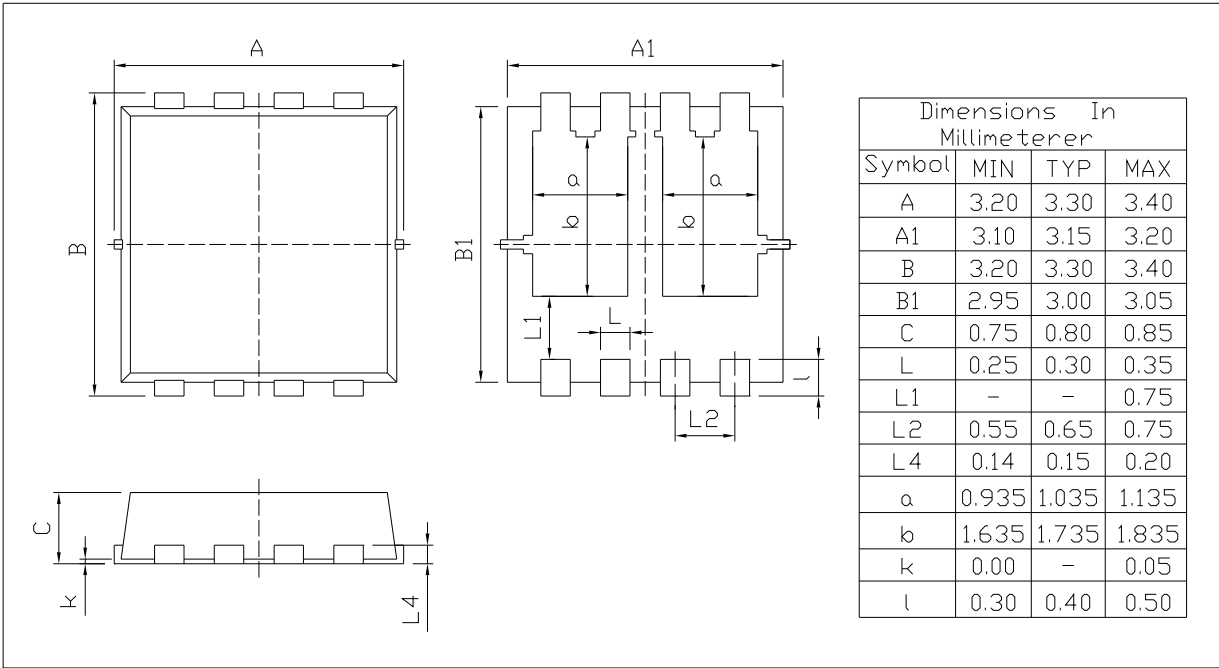


Rev.00 202011

/ Marking Instructions

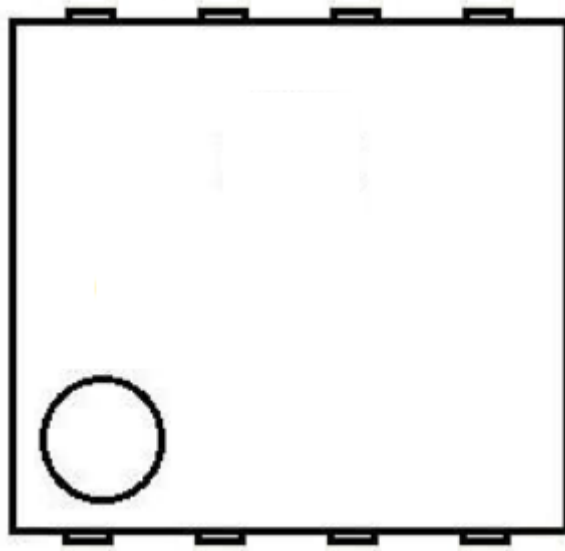

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

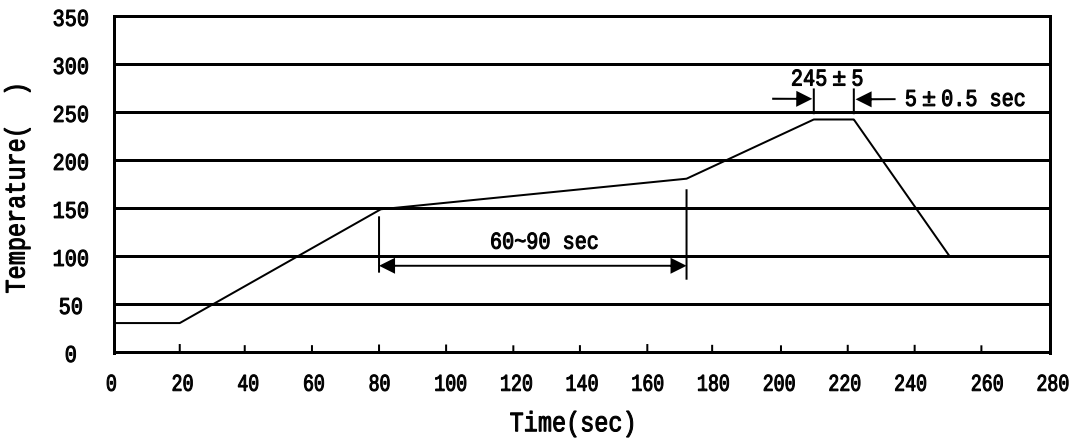

± ± ± ±

/ Resistance to Soldering Heat Test Conditions

± ±

/ Packaging SPEC.

/ Notices