

/ Descriptions

SOT-23 N MOS

/ Features

$\leq$

Ω

Ω

$\leq$

Ω


Ω

无卤产品。


/ Applications

DC-DC

/ Equivalent Circuit



/ Pinning

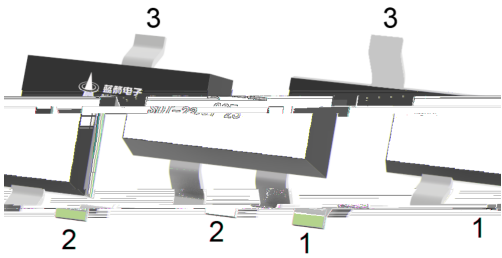

/ Marking

--	--

		~	
	θ		℃

		μ				
						μ
						Ω
						Ω
		μ				

/ Electrical Characteristic Curve



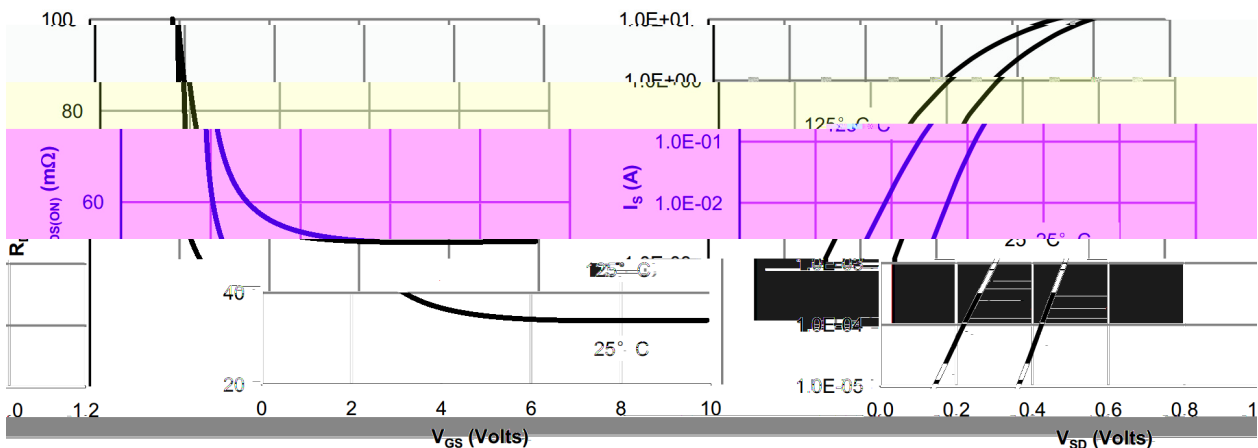


Figure 5: On-Resistance vs. Gate-Source Voltage

Figure 6: Body-Diode Characteristics


/ Electrical Characteristic Curve

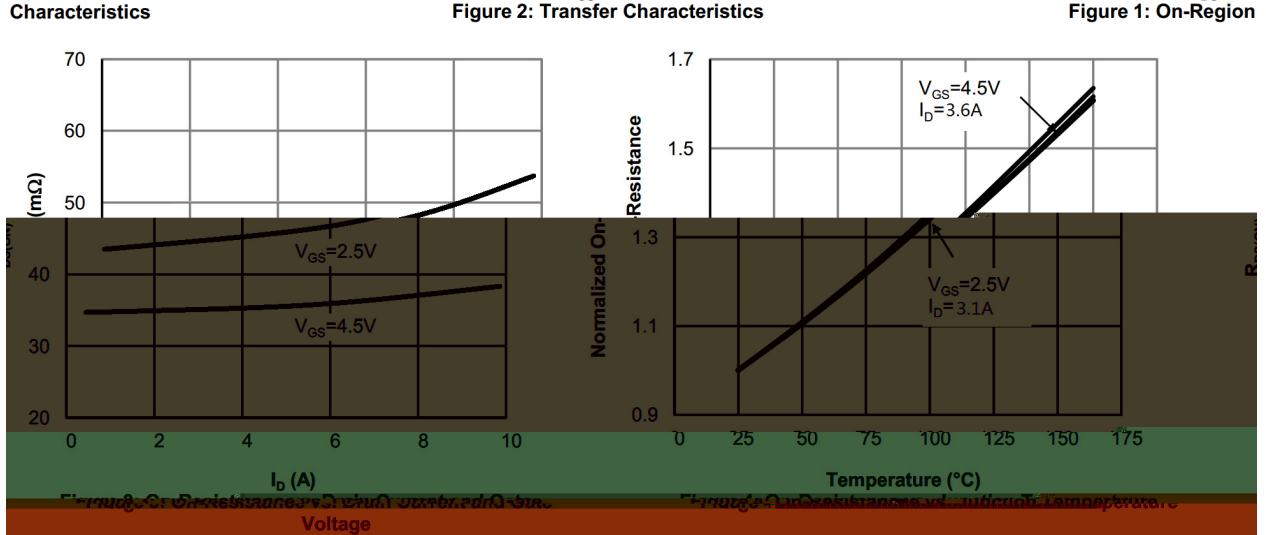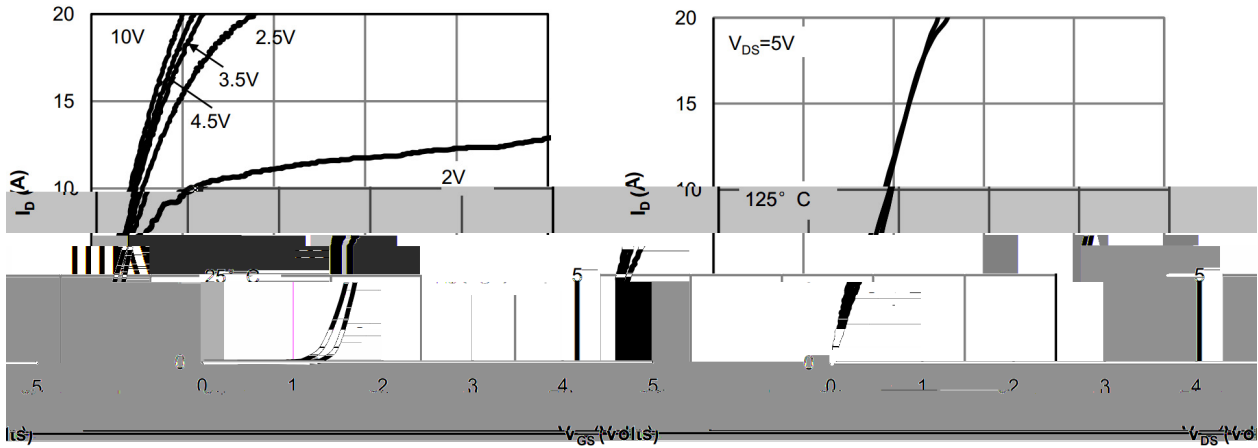


/ Package Dimensions

SOT-23


单位: mm

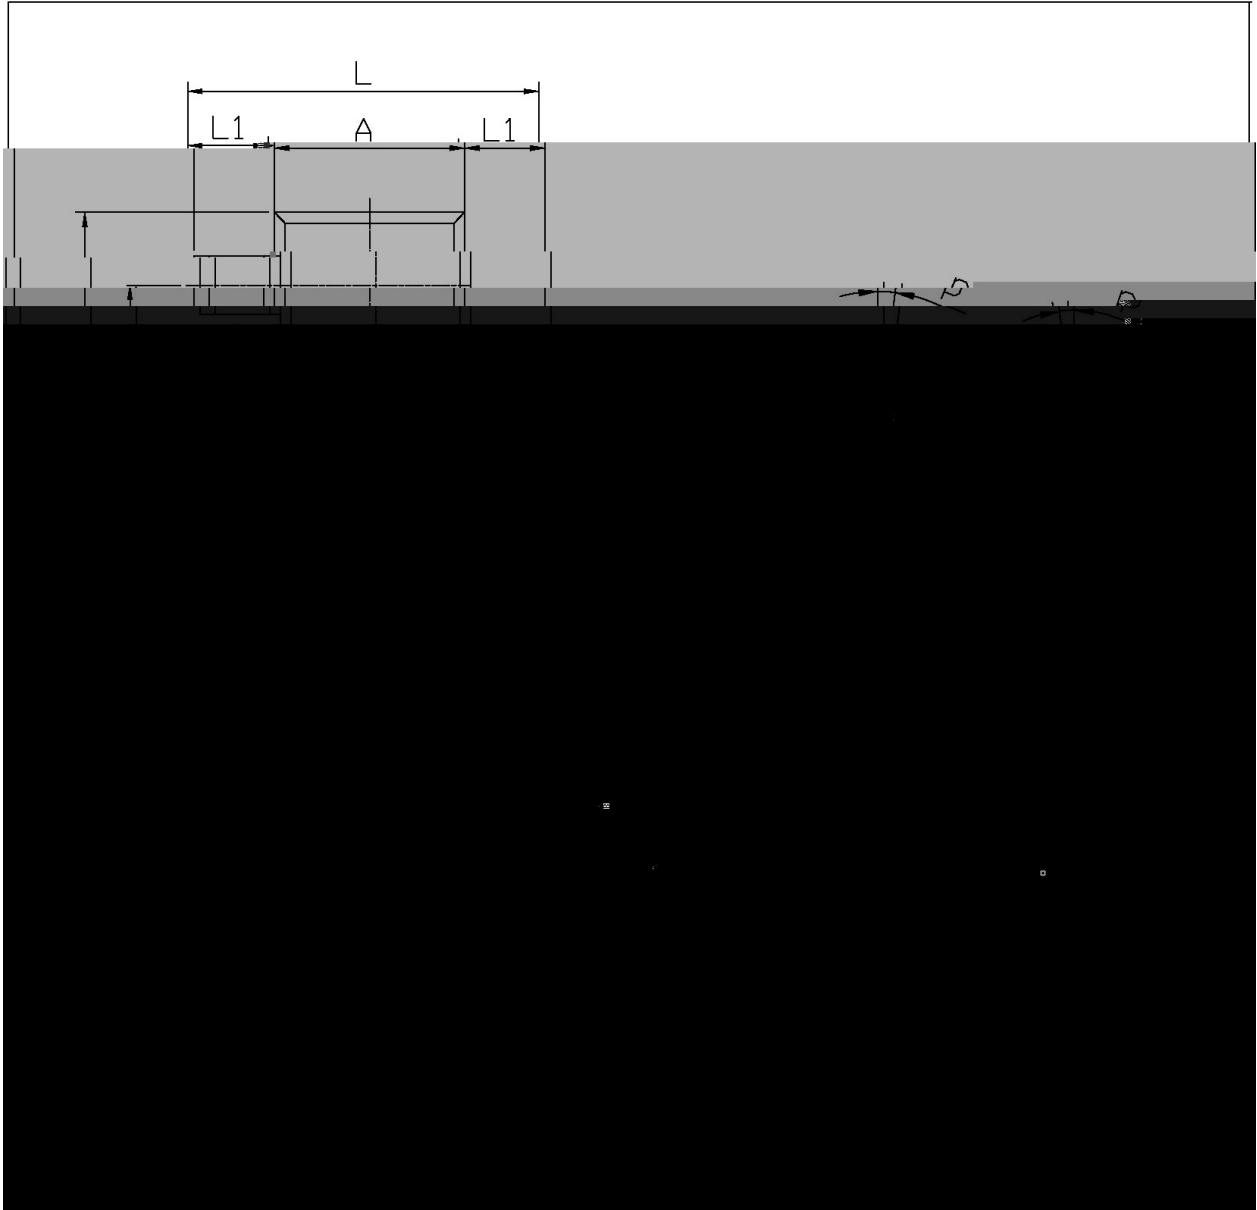

/ Marking Instructions

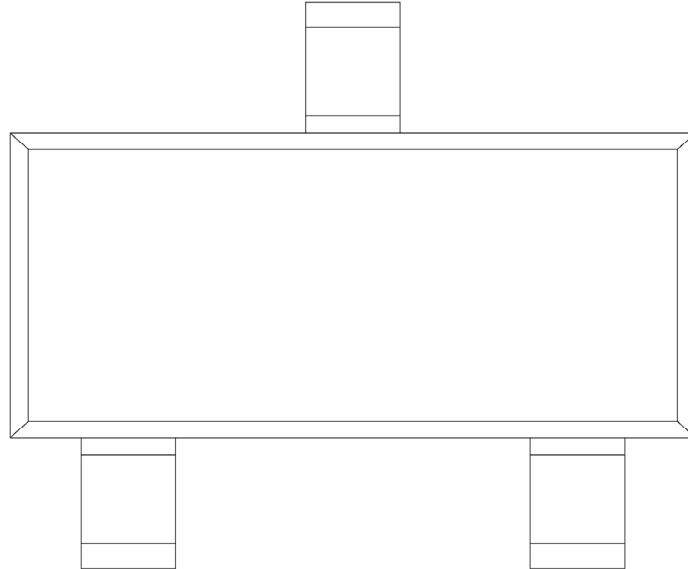

() / Temperature Profile for IR Reflow Soldering(Pb-Free)

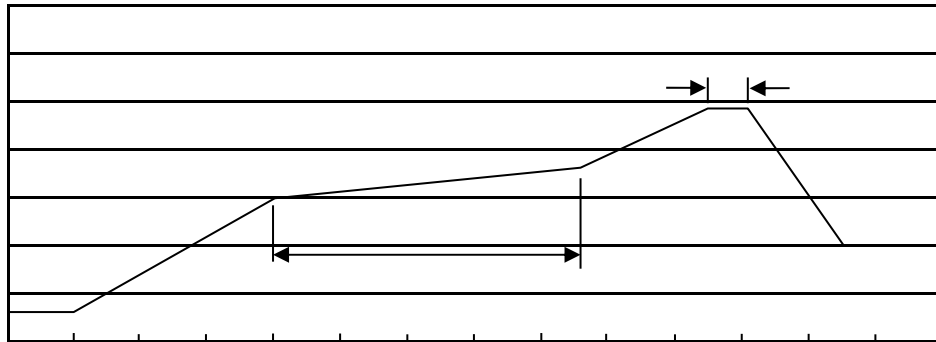 $\pm$ $\pm$ $\pm$ $\pm$

/ Resistance to Soldering Heat Test Conditions

 $\pm$ $\pm$

/ Packaging SPEC.

	Units/Reel /	Reels/Inner Box /	Units/Inner Box /	Inner Boxes/Outer Box /	Units/Outer Box /	Reel	Inner Box	Outer Box

/ Notices